

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
	1 2		Not Supplied by EP	2000	2110					X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Automatic
Control 2010
0,30 m/s


**Approved for
PRODUCTION**

Confirmed By Customer:

(Sign)

/ /
(date)

(Name)

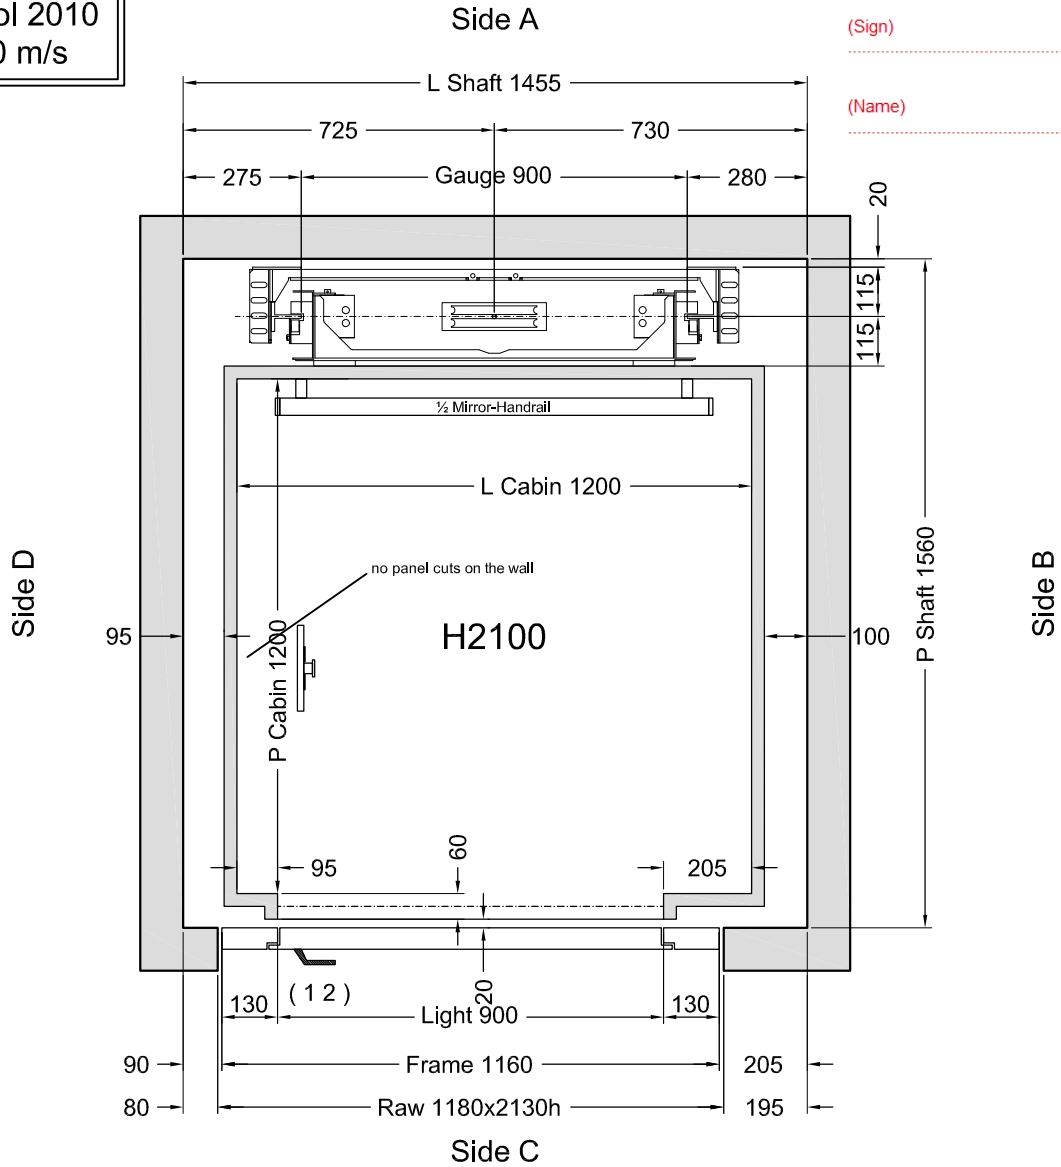

Customer own flooring: Dimensions **1200** (L) x **1230** (P) thks **15** mm Weight: **25** kg

Stops: 2 - Doors: 2

Shaft in **Masonry (Muratura)**

ORDER NUMBER	VERSIONS	Description	Designer	Date	Final Design Drawings
PS989		Varie modifliche.	L.Del Bianco	30/10/2012	 SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5
		Spallette di Piano/Cabina Lato C; Corretto L Vano.	L.Del Bianco	15/06/2012	
		Lato Accesso / Dim. Cabina.	L.Del Bianco	15/05/2012	
		Non XL.	L.Del Bianco	01/03/2012	
	CLIENT	Lift Shop	Disegno Definitivo D.Ogliastro	1° STESURA 28/02/12	CAPACITY
			CAPACITY	AREA m ²	
			350 Kg	1,44	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Arcata rinforzata
- Telefono
- Fotocellula tutta parete
- Prolunga Cavo PCA
- Manovra automatica 2010


**Approved for
PRODUCTION**

Confirmed By Customer:

(Sign)

(date)

(Name)

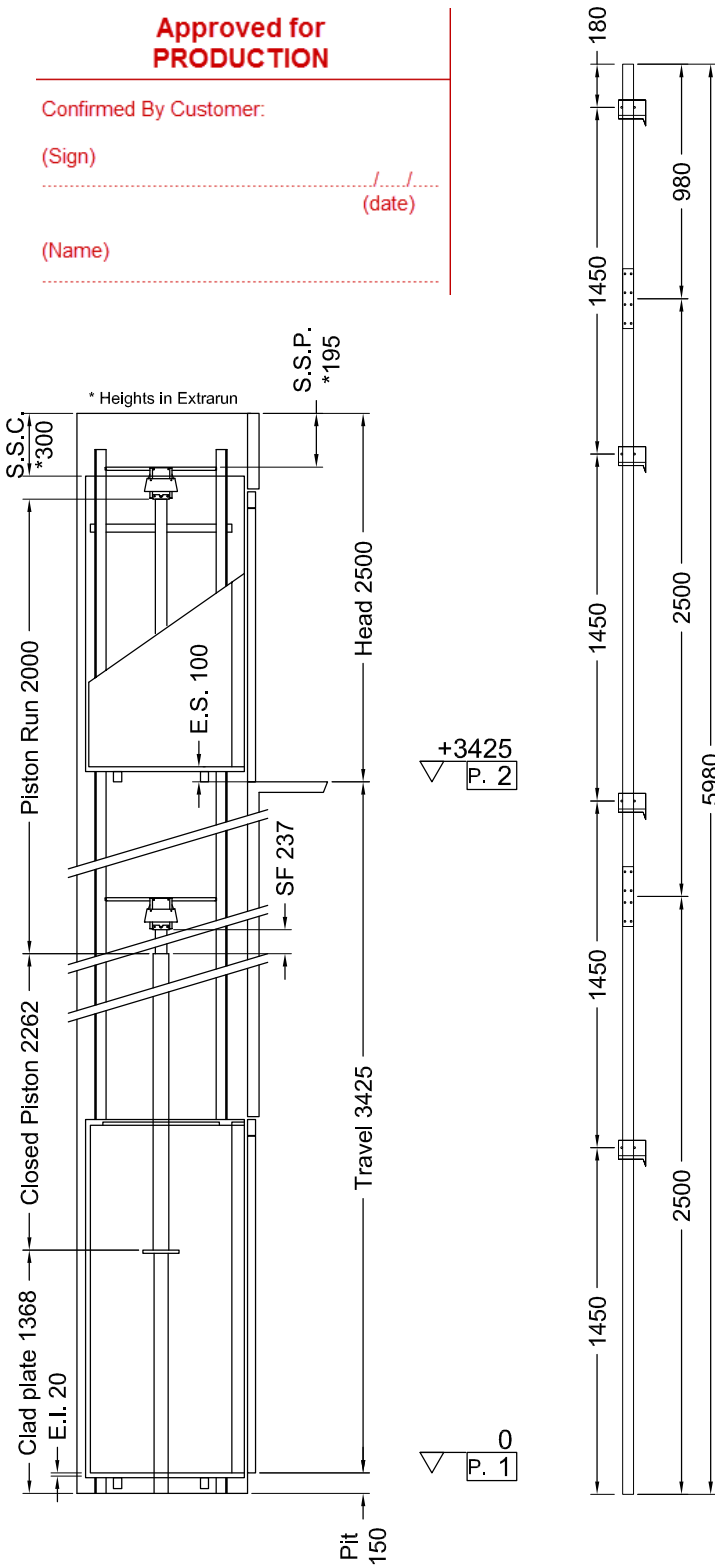

Indirect Installation	Speed 0,3 m/s	02/11/12 15.27 (V.2758)	
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P (N)	11482	P (N)	501
N (N)	539	N (N)	7693
F1 (N)	1875	F1 (N)	3125
F2 (N)	343	F2 (N)	572
SPACES		PRESSURES	
E.I. Extrarun below cabin (mm)	20	Max static pressure (bar)	38,15
E.S. Extrarun above cabin (mm)	100	Min static pressure (bar)	20,3
SF. Piston extraction (mm)	237	Overpressure limit (bar)	53,4
S.S.P. Piston/head (mm)	195	Residual pressure (bar)	1,3
S.S.C. Cabin/head (mm)	300		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010	Runners	T70-2A
Capacity (l/min)	35	Brackets (Nr)	4
Motor (V)	MF230V	Cables	9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables lenght (mm) 2 x	9000
Corrente (A)	19	Min actual breaking load (N)	42100
Piston	START Homø 70x5x2000	Tensile strenght N/mm ²	1570
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	8000		
Min hydraulic oil (L)	41		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT09	TUV DPD 004
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110
MACHINERY LOCATION			
At floor	2	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		
CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	1/2 Mirror	Lati A
Finishes	Inox BA (Lucido)	Handrail	INOX S.B., Lati A
Oper. panel	VERTICAL		
Floor	By Customer		
Roof	SPOTS LED - Inox BA (Lucido)		
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Double speed			
Reinforced arcade			
Telephone			
Full height Infra-red curtain			
Prolunga Cavo PCA			
Automatic Control 2010			

The information contained in this drawing are completed by masonry manual rev.3

	ORDER NUMBER	PS989	Disegno Definitivo	1° STESURA
			D.Ogliastro	28/02/12
				Final Design Drawings
			SCALE	SHEET
			OUT OF SCALE	2/2