


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	2	G 1	Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

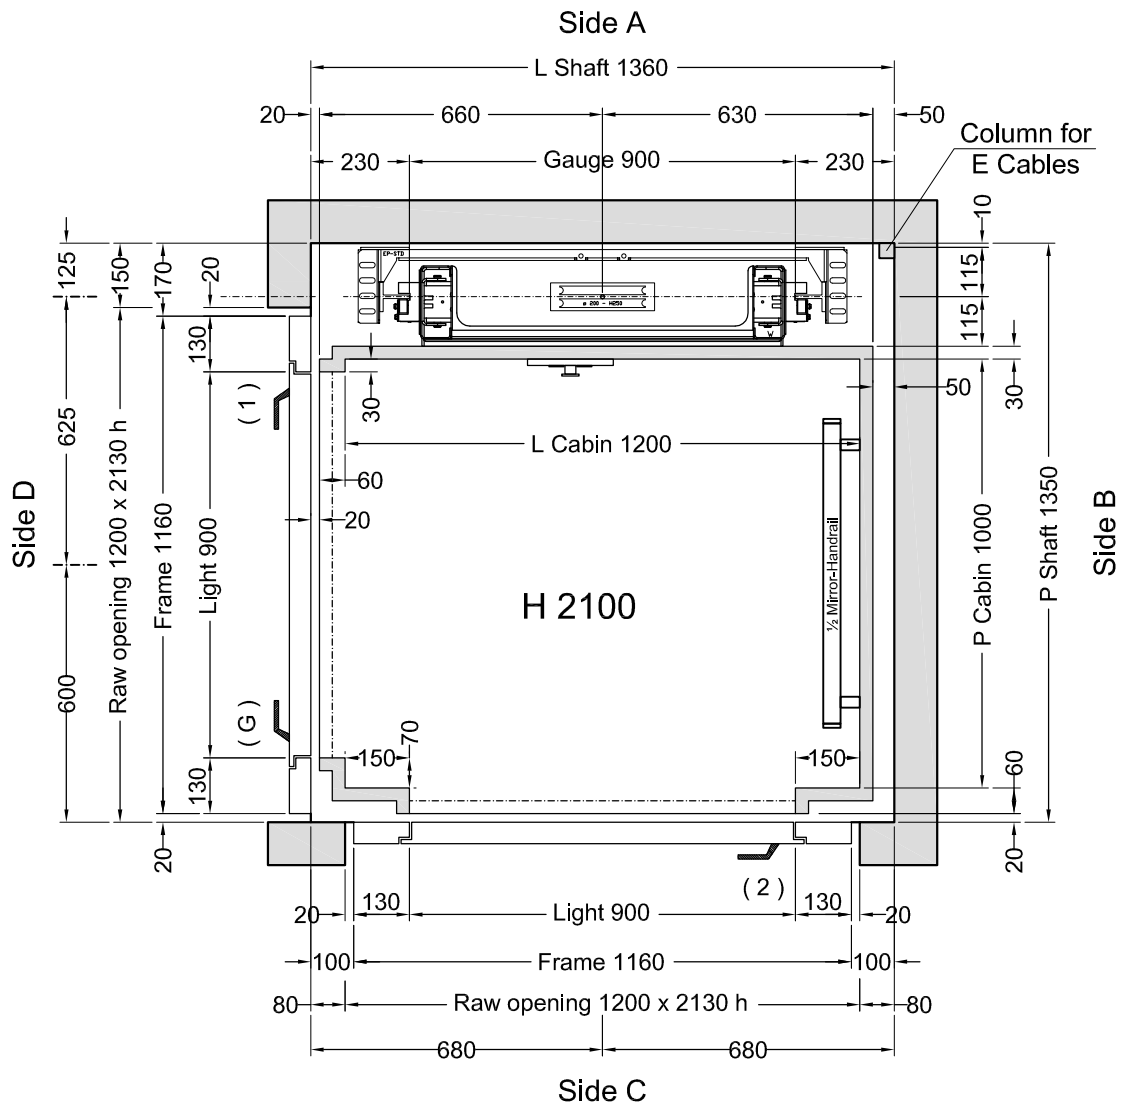

2
1
G

Stops: 3 - Doors: 3


Customer own flooring: Dimensions **1230 (L) x 1030 (P)** thks **20 mm** Weight: **21 kg**

Shaft in **Reinforced concrete (Cemento armato)**

		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/2
		L. Del Bianco	16/07/2014		SHEET DIMENS.
		D.Ogliastro	26/06/2014		A3
		Final Drawings L. Del Bianco	1° STESURA 22/07/14		SCALE 1:12.5
		CAPACITY 300 kg	AREA m ² 1,2	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsanti Cabina: G 1 2

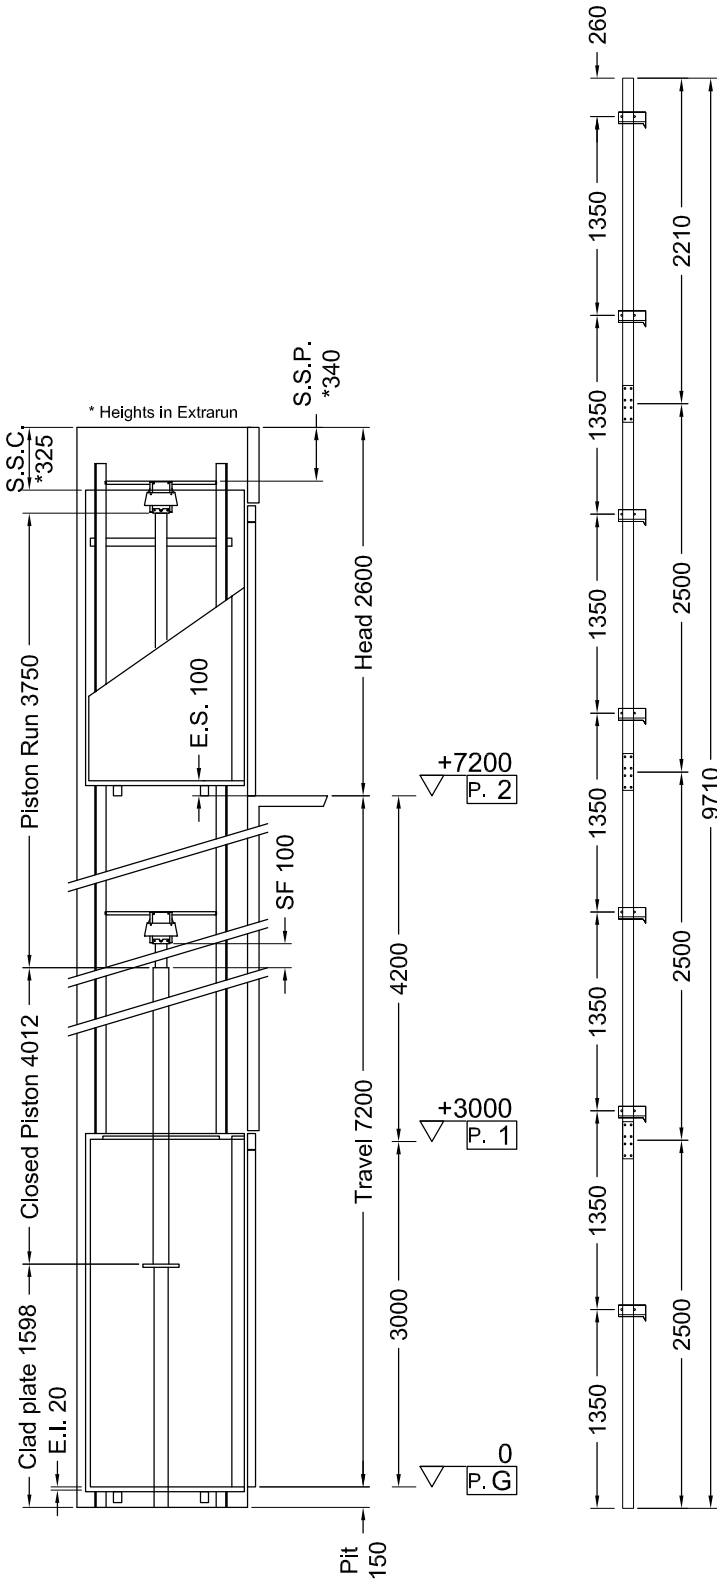

Indirect Installation	Speed 0,3 m/s	22/07/14 12.54 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	9905	P	(N)	638
N	(N)	865	N	(N)	6830
F1	(N)	1245	F1	(N)	2074
F2	(N)	269	F2	(N)	448

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	32,98
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	17,69
SF.	Piston extraction (mm)	100	Overpressure limit (bar)	46,18
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,66
S.S.C.	Cabin/head (mm)	325		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 7
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Nominal current (A)	19	Cables length (mm) 2 x	13000
Piston	START Homø 70x5x3750	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	49		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	G	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	C		

CABIN		CABIN ACCESSORIES	
Panels	Grigio PPS1	½ Mirror	Side B
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	SPOTS LED - Blanco A32PP		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Automatic Control 2011
 - Cabin Buttons: G 1 2



Final Drawings	L. Del Bianco	1° STESURA	22/07/14
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/2