


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1 4		1 2 3	Standard RAL 9005	2000	2100	Panoramic	Transparent			X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

**Automatic Control
2008**

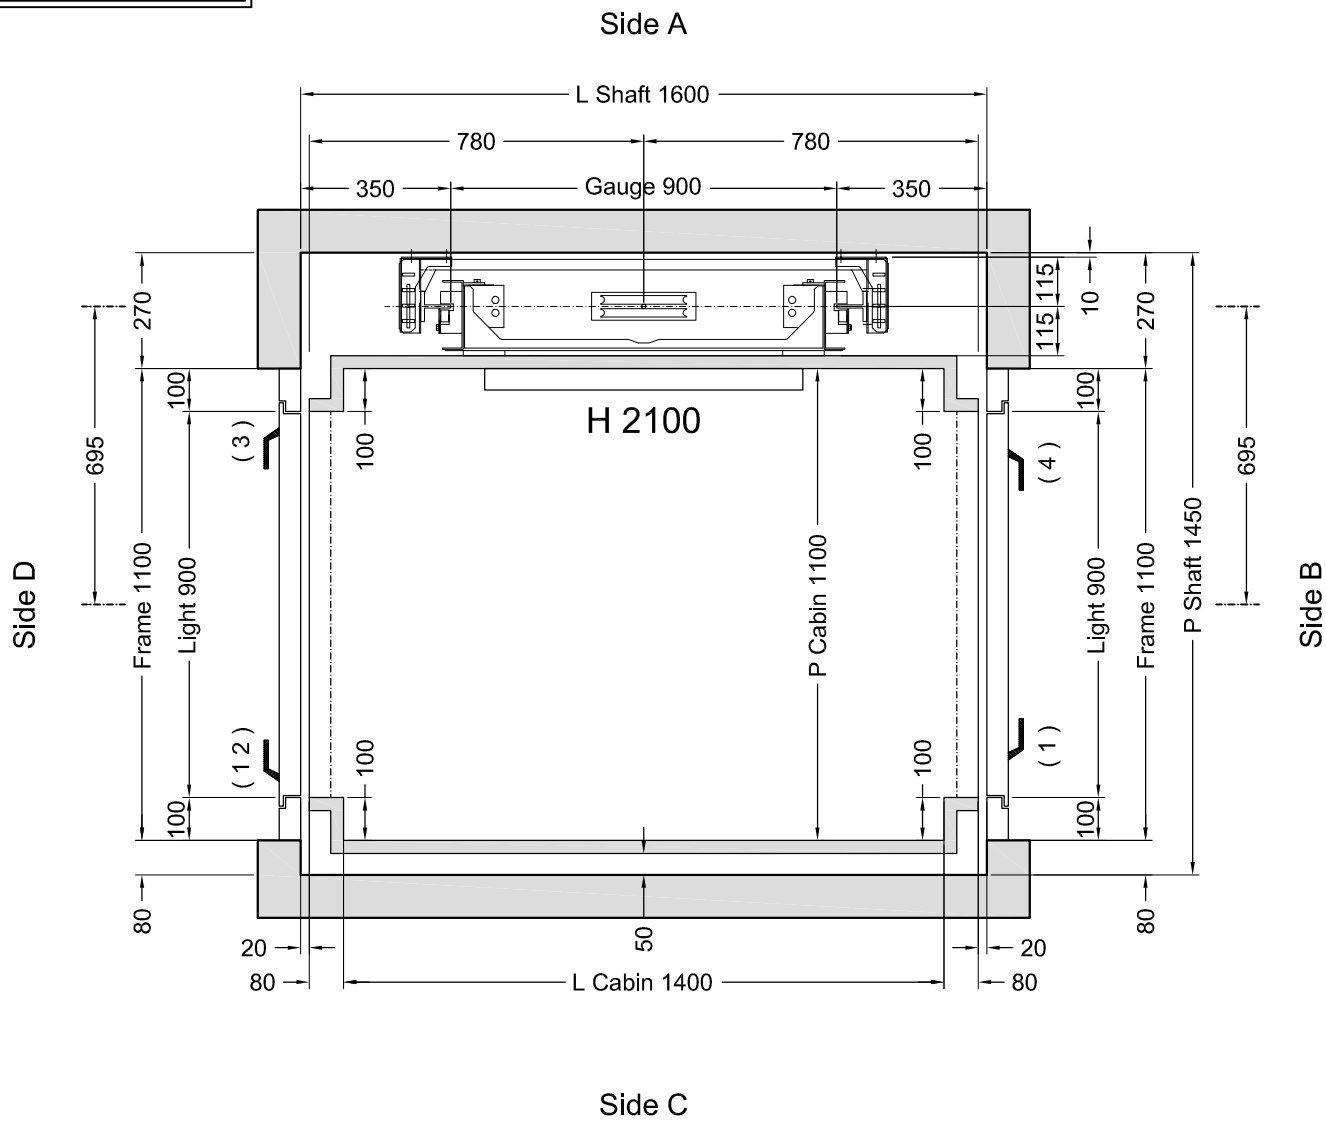

Customer own flooring: Dimensions **1460 (L) x 1100 (P)** thks **15 mm** Weight: **50 kg**


Stops: 4 - Doors: 5

Shaft in **Masonry (Muratura)**

	VERSIONS	Description	Designer	Date	Final Drawings design	
		caratteristiche porte RAL e panoramiche, chiavi abil. piano, maniglie CASPIM-corsa da 10180 a al10280	D.Ogliastro	07/11/2011	 SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5	
		Disegno Definitivo D.Ogliastro	1° STESURA 07/11/11	CAPACITY 350 Kg		AREA m ² 1,54

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pistone In due pezzi
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Interruttore blocco porta quadro
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete
- Pulsanti quadr 50x50 Inox Scotch Brtte
- Arresti fissi in fossa
- Manovra Automatica 2008

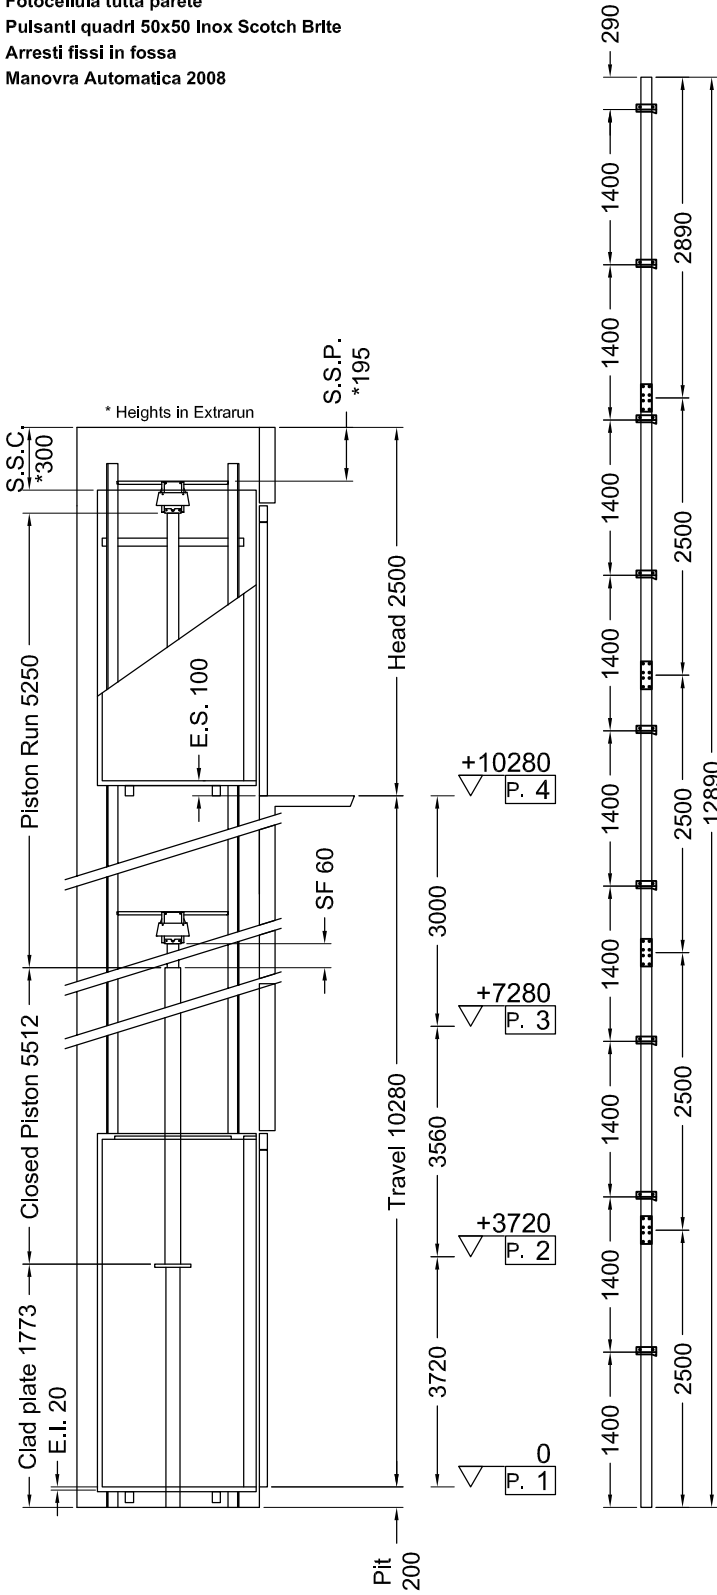

Indirect Installatton	Speed 0,3 m/s	07/11/11 08.24 (V.2504)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12126	P	(N)	1105
N	(N)	1154	N	(N)	8133
F1	(N)	1687	F1	(N)	2811
F2	(N)	454	F2	(N)	757

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	37,81
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	19,97
SF.	Piston extraction (mm)	60	Overpressure limit (bar)	52,94
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	2,87
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	START 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets (Nr)	9
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	15300
Piston	START Home (ø) 70x10x5250	Min actual breaking load (N)	42100
Opt. oil position	BASSO		
Tubing	START		
Tubing lenght (mm)	14000		
Min hydraulic oil (L)	41,2		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START	1/2"03026/01;03026/02	IMQ CA50.00526
Key Locks	SCHMERSAL	AV 20	TÜV ATV 528

MACHINERY LOCATION			
At floor	4	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN	CABIN ACCESSORIES
Panels	Inox Scotch Brtte
Finishes	Inox Scotch Brtte
Oper. panel	HORIZONTAL
Floor	By Customer
Roof	SPOTS LED - Bianco A1

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Piston In 2 pcs
Manual pump
Manostat with overweight signal
Double speed
Cabinet General switcher to enabling controller
Reinforced arcade
Handles CASPIM
Full height infra-red curtain
Squared buttons 50x50 Inox Scotch Brtte
Pit stop bow
Automatic control 2008

The information contained in this drawing are completed by masonry manual rev.3

	Disegno Definitivo	1° STESURA
	D.Ogliastro	07/11/11
	Final Drawings design	
SCALE	OUT OF SCALE	SHEET
		2/2