




**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Carter Tetto cabina
- Manovra Automatica 2011

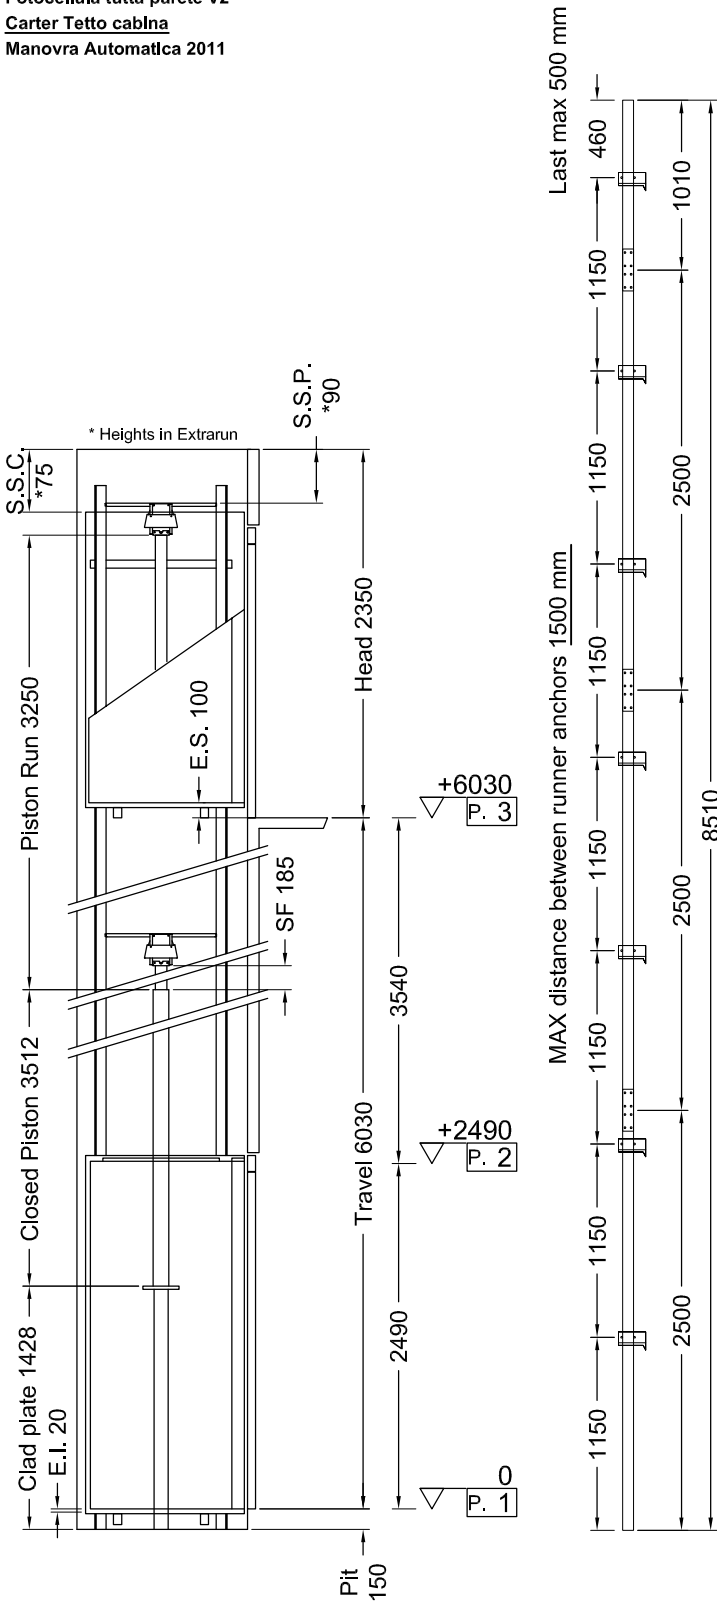

Indirect Installation	Speed 0,3 m/s	30/10/14 12.46 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12466	P	(N)	599
N	(N)	759	N	(N)	8470
F1	(N)	1694	F1	(N)	2823
F2	(N)	398	F2	(N)	664

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	40,13
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,29
SF.	Piston extraction (mm)	185	Overpressure limit (bar)	56,18
S.S.P.	Piston/head (mm)	90	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)	75		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 7
Power (Kw)	2,9	Cables	Ø 9 mm 8-(1+9+9)
Nominal current (A)	19	Cables length (mm) 2 x	12000
Piston	Start Home (Ø) 70x5x3250	Min actual breaking load (N)	51000
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	9000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	5000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Panoramic	Side B, C
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B, C
Oper. panel	VERTICAL Flush mounted	Outside covering	Side B, C, Roof
Floor	TOUCH 2402	Outside finishing	Inox Scotch Brite
Ceiling	SPOTS LED - Blanco A1		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
  - Guides dimension 2.5 m
  - Manual pump
  - Manostat with overweight signal
  - Two speed
  - False head device
  - Handles CASPIM
  - Telephone by Lift Shop
  - Full height infra-red curtain V2
  - Roof covering
  - Automatic Control 2011



Final Drawings	L. Del Bianco	1° STESURA	30/10/14
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/2