


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		B 1 2	Not Supplied by EP	2000	2110		Absent		C2 - <u>Icaro Display</u>

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

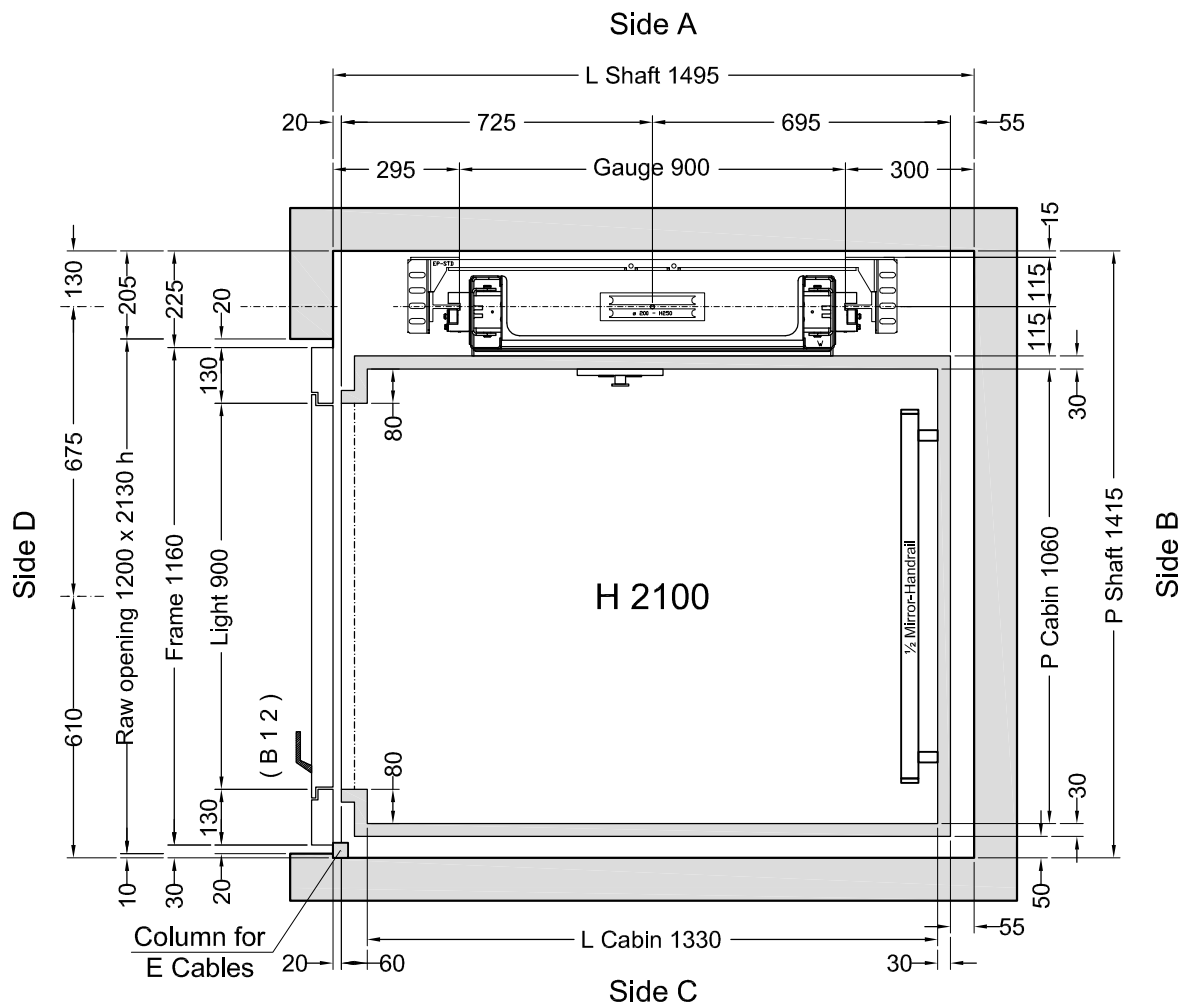

2
1
B

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1360 (L) x 1060 (P)** thks **20 mm** Weight: **50 kg**

ORDER NUMBER	VERSIONS	Description	Designer	Date	Final Drawings	
		PS1501				
					ELFO	1/2
	Distanza Locale Macchie 3 m; Display Icaro in cabina ed ai piani.		L. Del Bianco	28/11/2013		SHEET DIMENS. A3
			Final Drawings L. Del Bianco	1° STESURA 10/12/13		SCALE 1:12.5
			CAPACITY 300 kg	AREA m ² 1,41	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno Plano 1 con tempo regolabile
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Display ICARO In cabina
- Manovra Automatica 2011

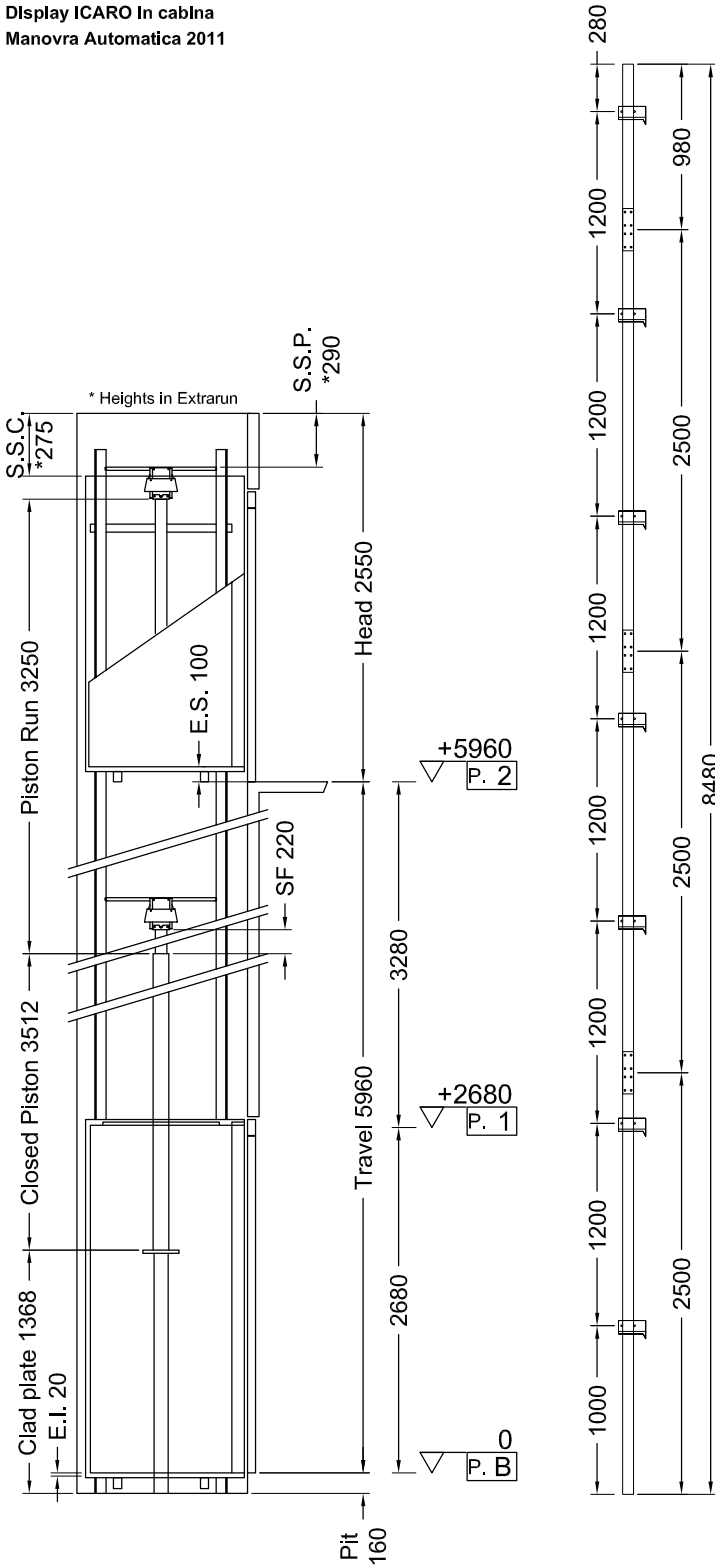

Indirect Installaton	Speed 0,3 m/s	10/12/13 14.28 (V.2833)
----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11929	P	(N)	599
N	(N)	770	N	(N)	8124
F1	(N)	1563	F1	(N)	2604
F2	(N)	347	F2	(N)	579

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	37,38
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,08
SF.	Piston extraction (mm)	220	Overpressure limit (bar)	52,33
S.S.P.	Piston/head (mm)	290	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)	275		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 7
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	11000
Piston	START Homø 70x5x3250	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	7000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110


MACHINERY LOCATION			
At floor	B	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	See Notes *	½ Mirror	Side B
Finishes	Inox BA mecc.	Handrail	Inox BA (Lucido), Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Roof	SPOTS LED - Inox BA mecc.		
(*) Side A-C: SC201 Rosso - Side B: SC147			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dlmension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
<u>Auto return to Level 1 after pre-set time delay</u>
False head device
Handles CASPIM
Telephone by Lift Shop
Full height Infra-red curtain V2
ICARO display In cabin
Automatic Control 2011



The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

	CLIENT	Lift Shop	Final Drawings	L. Del Bianco	1° STESURA	10/12/13
	ORDER NUMBER	PS1501	Final Drawings			
			SCALE	OUT OF SCALE	SHEET	2/2