


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
		1 2	STANDARD ALUMINIUM COVERING	2000	2100	PANORAMIC	TRANSPARENT			X		
		3	STANDARD ALUMINIUM COVERING	2000	2100	PANORAMIC	TRANSPARENT			X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Pavimento a carico Cliente: Dim. **1310** (L) x **1200** (P) Spes. **15** mm Peso: **50** Kg
(EN)

Fattibilità n° 723

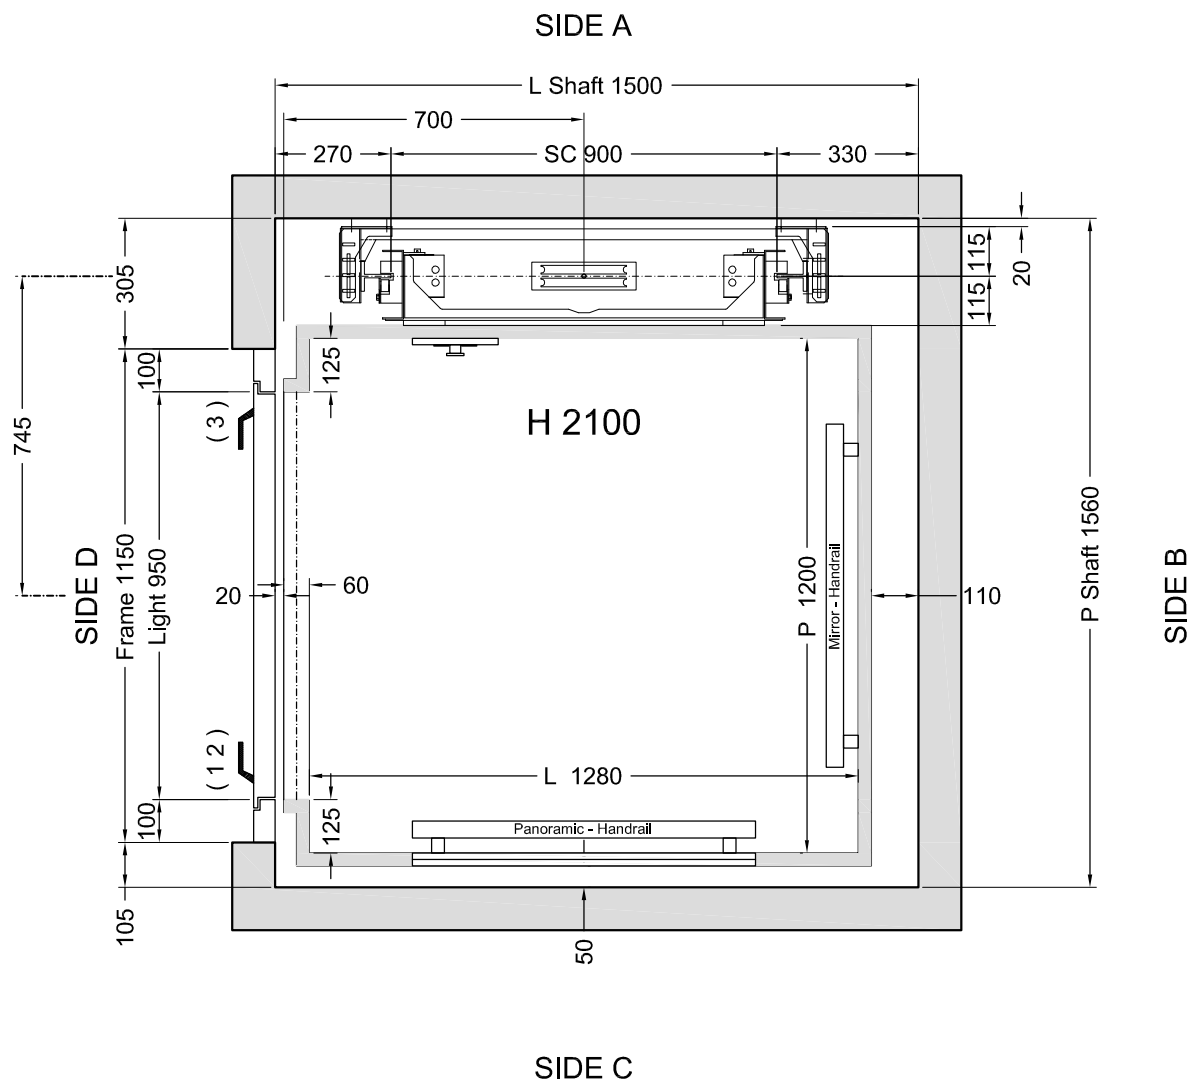

Fermate: 3 - Servizi: 3


Shaft on **Masonry (muratura)**

VERSIONS	Description	Designer	Date	Rev. Disegno Definitivo
	1	velocità 0.30- Fattibilità display cabina e piani	L.Del Bianco	
		Disegno Definitivo D.Ogliastro	1° STESURA 18/09/08	
		CAPACITY 350 Kg	AREA M ² 1,54	CAPACITY



ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Pompa a mano
- Pressostato
- Doppia velocità
- Manovra con autotenuta
- Arcata rinforzata
- Fotocellula tutta parete

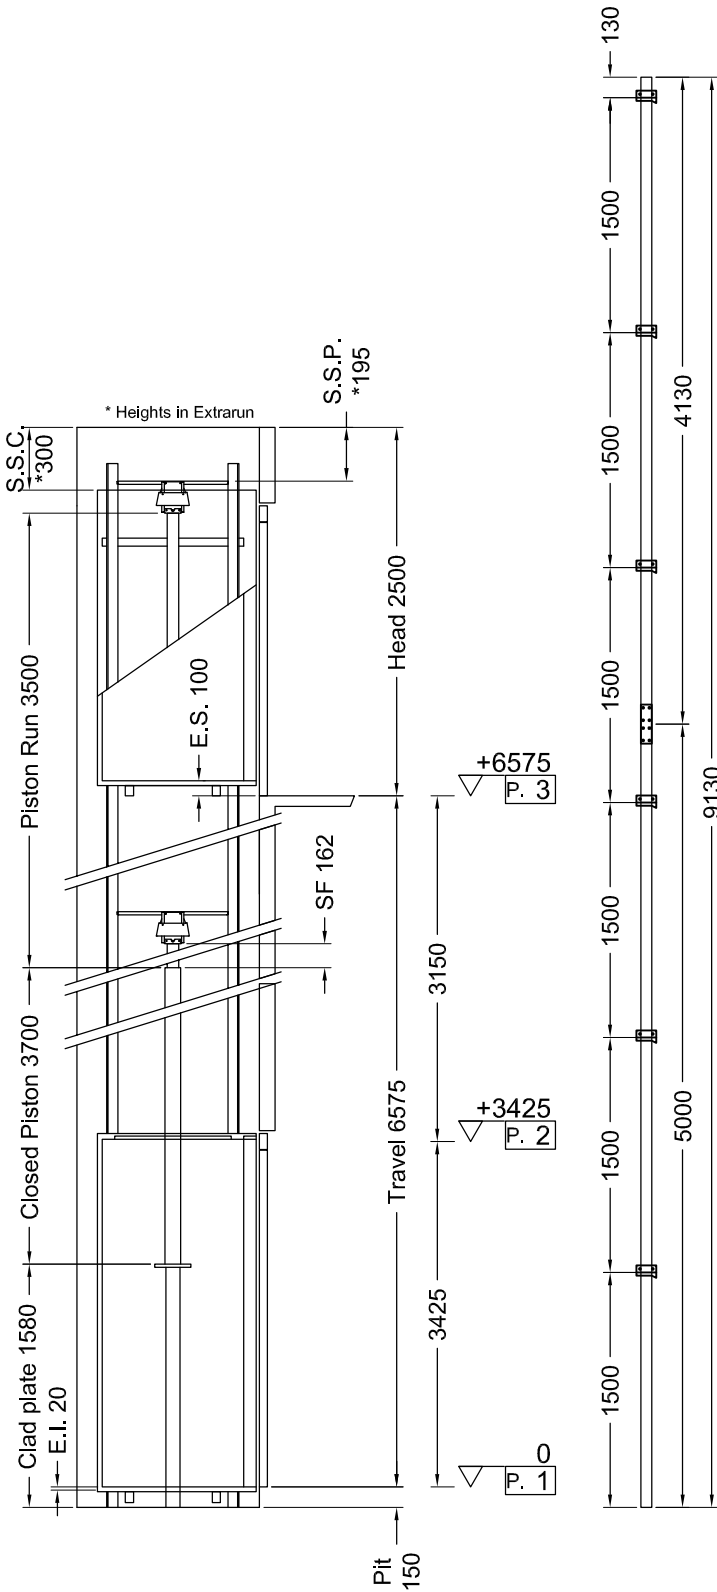

Indirect Installation	Speed 0,3 m/s	18/09/08 18.13	(V.017)
-----------------------	---------------	----------------	---------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12334	P	(N)	619
N	(N)	820	N	(N)	8424
F1	(N)	1954	F1	(N)	3257
F2	(N)	398	F2	(N)	663

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	39,7
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	21,85
SF.	Piston extraction (mm)	162	Overpressure limit (bar)	55,57
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,61
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	MORIS CM3A	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3,3	Cables lenght (mm) 2 x	11600
Piston	MORIS 9130 (ø) 70x5x3500	Min actual breaking load (N)	42100
Attacco Olio	basso		
Tubing	MORIS		
Tubing lenght (mm)	9000		
Min hydraulic oil (L)	80,2		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	MORIS	0825/P	IMQ I0222
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Away from shaft (mm)	5000
Cables enter in shaft : side	A		

CABIN		CABIN ACCESSORIES	
Panels	Inox Scotch Brite	Handrail	INOX S.B.,Lati B, C
Finishes	Inox BA (Lucido)	Mirror	Lati B
Oper. panel	A COLONNA	Panoramic	Lati C
Floor	a carico Cliente	Riv. Est.	Lati C
Roof	FARETTI-Inox BA (Lucido)	Riv. Est. Pannelli	Inox BA (Lucido)
		Riv. Est. Finiture	Inox BA (Lucido)

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Manual pump
Monostat
Double speed
Automatic control
Reinforced arcade
Full height Infra-red curtain

LE INFORMAZIONI CONTENUTE NEL PRESENTE DISEGNO SONO INTEGRATE DAL MANUALE OPERE MURARIE.

		Disegno Definitivo	1° STESURA
		D.Ogliastro	18/09/08
		Rev. Disegno Definitivo	
	SCALE	OUT OF SCALE	SHEET
			2/2