


FLOOR DOOR

| Side B | Side C | Side D | VERSION | H LIGHT | H FRAME | FRAME | WINDOW | GLASS | ACCESSORIES |
|--------|--------|--------|---------------------------|---------|---------|--------------------------|--------|----------------|-------------|
| 12 | | C | Galvanized and RAL 7047 * | 2000 | 2100 | Galvanized and RAL 7047* | Double | Etched Neutral | C2 |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

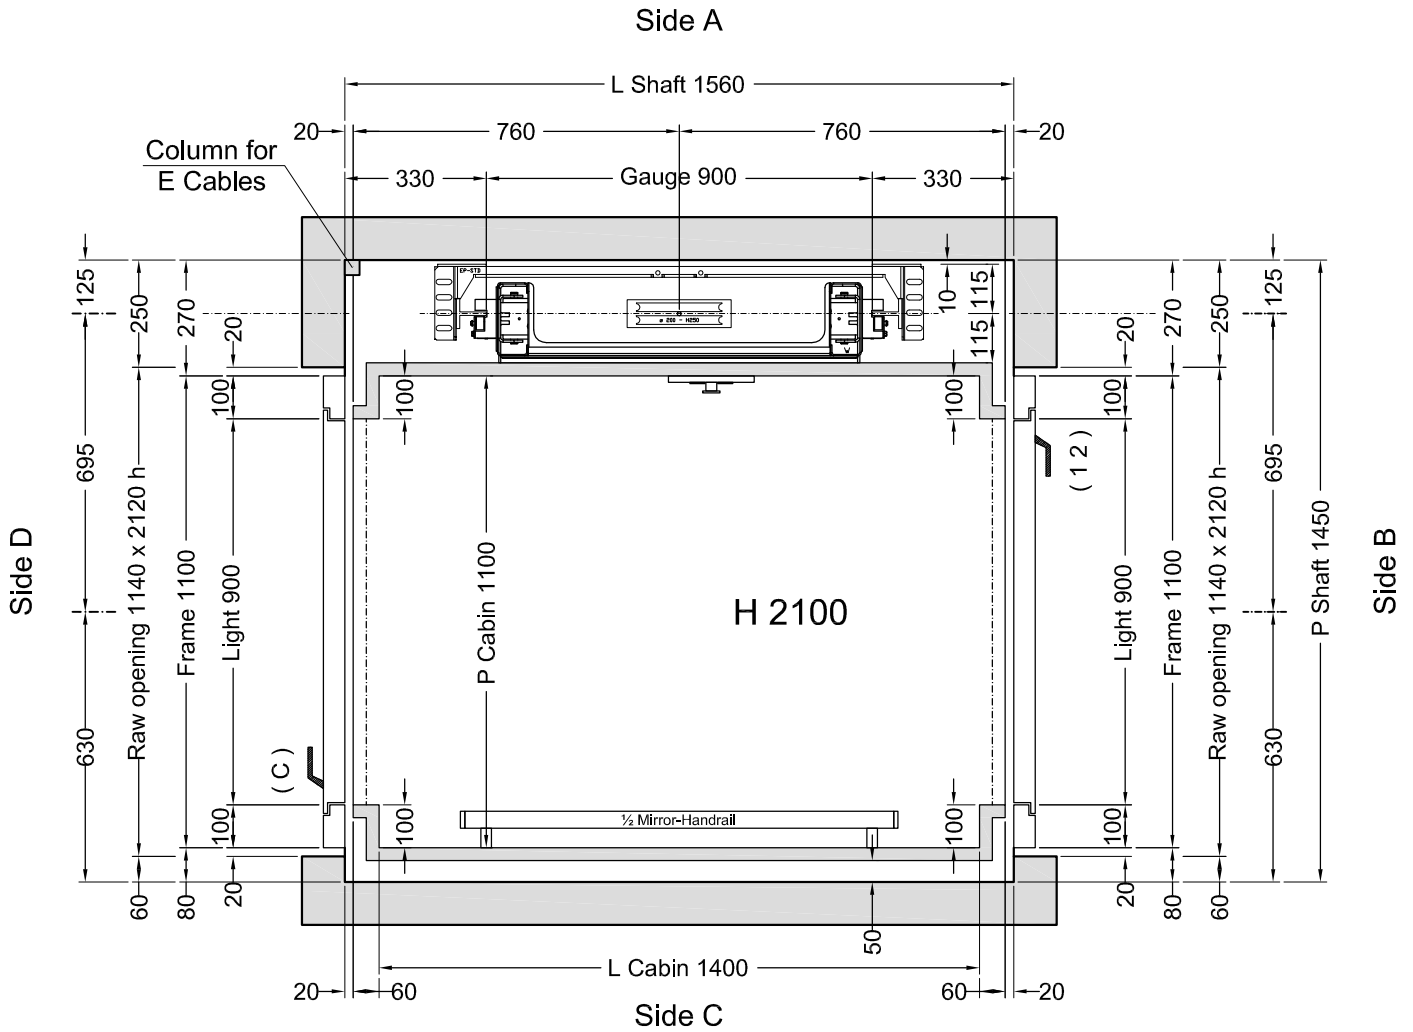


Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**



| | | | | | | |
|-------------------------------|----------------------------|--|--|-------------------------------|---------------------------|------------------------------------|
| ORDER 92425 - Brisbane | | Description | Designer | Date | Final Drawings | |
| ORDER NUMBER PS1920 | VERSIONS | | | | Model ELFO | SHEET 1/2 |
| | | smooth finish-flat, no raised edges | D.Ogliastro | 02/02/2015 | | SHEET DIMENS. A3 |
| | | Varie modifiche. | L. Del Bianco | 29/01/2015 | | SCALE 1:12.5 |
| | CLIENT Lift Shop | PLACE OF INSTALLATION 30 Eagle Terrace, Shorncliffe, QLD | Final Drawings L. Del Bianco | 1° STESURA 02/03/15 | CAPACITY 300 kg | AREA m ² 1,54 |
| | | | | | CAPACITY | |

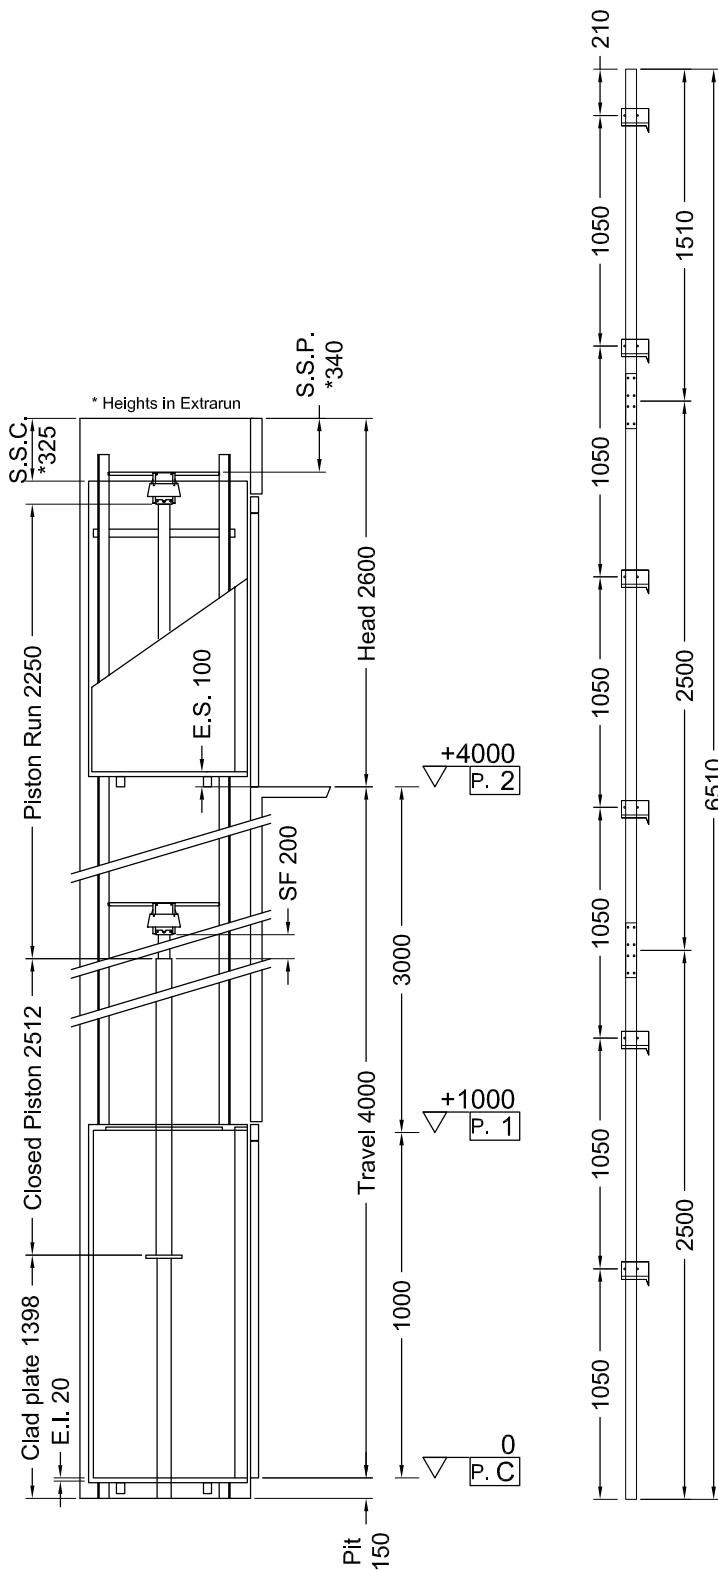

Indirect Installation Speed 0,3 m/s 02/03/15 11.38 (V.2851)

| THRUST DURING NORMAL OPERATION | | | THRUST OF SAFETY DEVICE INTERVENT. | | |
|--------------------------------|-----|-------|------------------------------------|-----|------|
| P | (N) | 11294 | P | (N) | 520 |
| N | (N) | 640 | N | (N) | 7649 |
| F1 | (N) | 1553 | F1 | (N) | 2589 |
| F2 | (N) | 406 | F2 | (N) | 677 |

| SPACES | | PRESSURES | | |
|--------|---------------------------|-----------|---------------------------|-------|
| E.I. | Extrarun below cabin (mm) | 20 | Max static pressure (bar) | 33,64 |
| E.S. | Extrarun above cabin (mm) | 100 | Min static pressure (bar) | 18,34 |
| SF. | Piston extraction (mm) | 200 | Overpressure limit (bar) | 47,1 |
| S.S.P. | Piston/head (mm) | 340 | Residual pressure (bar) | 1,35 |
| S.S.C. | Cabin/head (mm) | 325 | | |


| HYDRAULIC UNIT | | MECHANICAL PARTS | |
|-----------------------|---|------------------------------|------------------|
| Central unit | GMV HL 3010 (-*) | | |
| Capacity (l/min) | 35 | Guide rails | 70x70x9 |
| Motor (V) | MF230V | Brackets | (Nr) 6 |
| Power (Kw) | 2,9 | Ropes | Ø 9 mm 6-(1+9+9) |
| Nominal current (A) | 27 | Cables length (mm) 2 x | 9000 |
| Piston | START Home (Ø)70x5x2250 | Min actual breaking load (N) | 47300 |
| Opt. oil position | BASSO | | |
| Tubing | 3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4" | | |
| Tubing length (mm) | 7000 | | |
| Min hydraulic oil (L) | 42 | | |

| SECURITY DEVICES | Manufacturer | Model | Certificate |
|------------------|----------------|---------------------------------|-------------|
| Safety Gear | PFB | BP1 | TÜV AFV515 |
| Block Valve | START ELEVATOR | 1/2" 0327 | CA50.00525 |
| Key Locks | Prudhomme | PLT/L/CPX NL 11-400-1002-125-02 | |

| MACHINERY LOCATION | | | |
|-----------------------------|---|---------------------------|-----------|
| At floor | C | Length of the hose travel | 3000 (mm) |
| Cables enter in shaft: Side | A | | |

| CABIN | | CABIN ACCESSORIES | |
|-------------|---|-------------------|-------------------|
| Panels | Similinox F12PPS | ½ Mirror | Side C |
| Finishes | Inox Scotch Brite | Handrail | Inox S.B., Side C |
| Oper. panel | VERTICAL (Like finishes) | | |
| Floor | 121-155 - SMOKED PEARL | | |
| Ceiling | UNIVERSAL Led Strips - Similinox F12PPS | | |

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Auto Return to Level 2 after adjustable time
 - Handles CASPIM
 - Telephone by Lift Shop
 - Full height infra-red curtain V2
 - Doors LTL
 - Automatic Control 2011
 - Blue Buttons
 - Cabin Buttons: C 12



ORDER 92425 - Brisbane
 ORDER NUMBER PS1920

CLIENT Lift Shop
 PLACE OF INSTALLATION 30 Eagle Terrace, Shorncliffe, QLD

Final Drawings L. Del Bianco
 Final Drawings
 SCALE OUT OF SCALE
 SHEET 2/2