


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2	Standard RAL 9007	2000	2140	RAL 9007	Panoramic	Etched Neutral	Ditec - C2 - PM

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

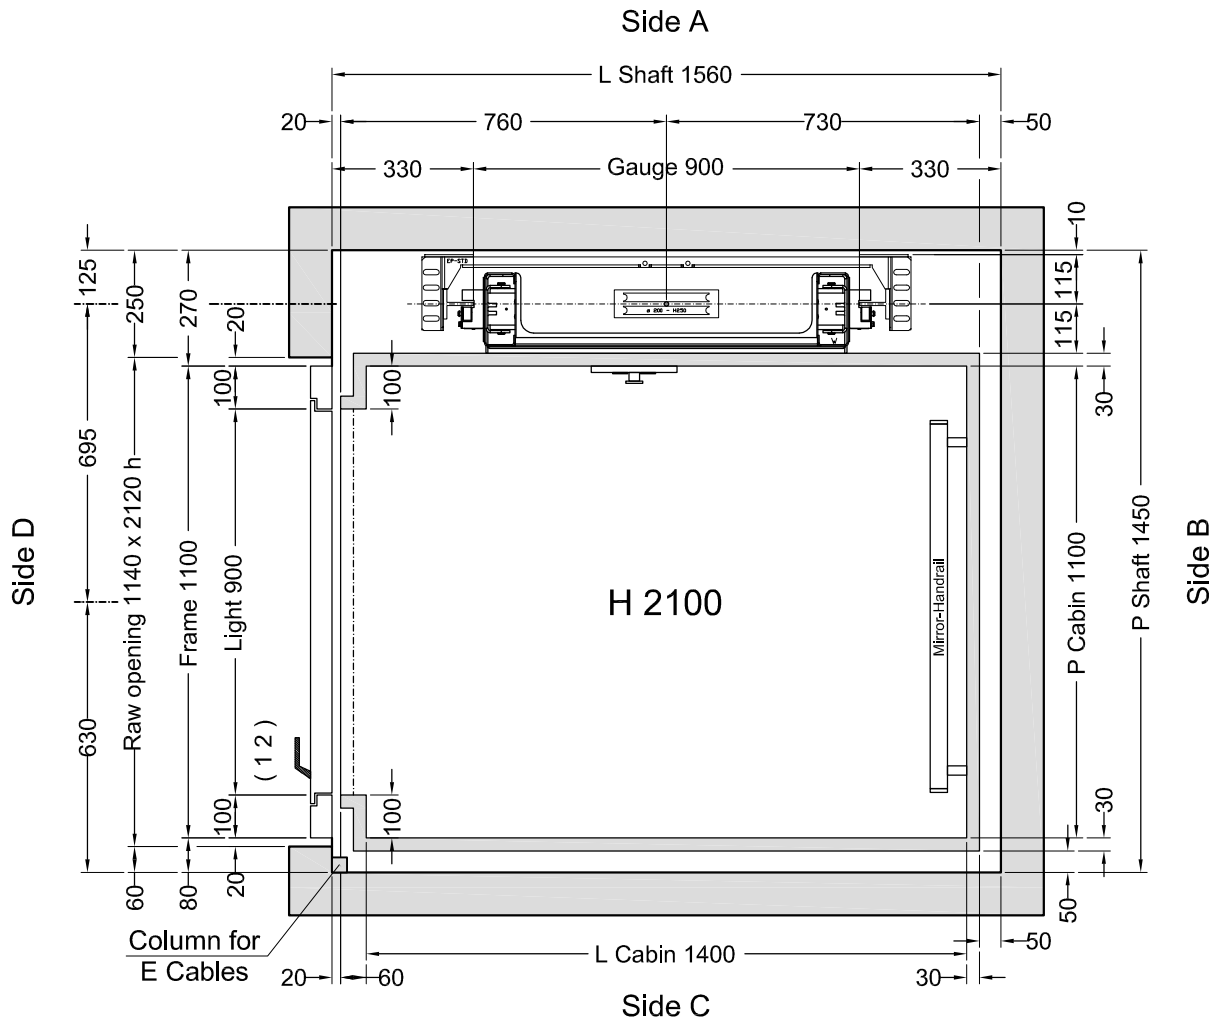

Feasibility n° 2075 - Ditec + Radio controller

Stops: 2 - Doors: 2


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **5 mm** Weight: **27 kg**

			Designer	Date	Final Drawings	
					Model ELFO	SHEET 1/2
			D.Ogliastro	25/07/2014		SHEET DIMENS. A3
			Final Drawings L. Del Bianco	1° STESURA 05/08/14		SCALE 1:12.5
			CAPACITY 300 kg	AREA m ² 1,54	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ditec
- Radlocomando
- Maniglie CASPIM
- Telefono
- Fotocellula tutta parete V2
- Pulsantiera a murare al piani
- Manovra Automatica 2011
- Foro aggiuntivo 50x50 sulla pulsantiera di cabina

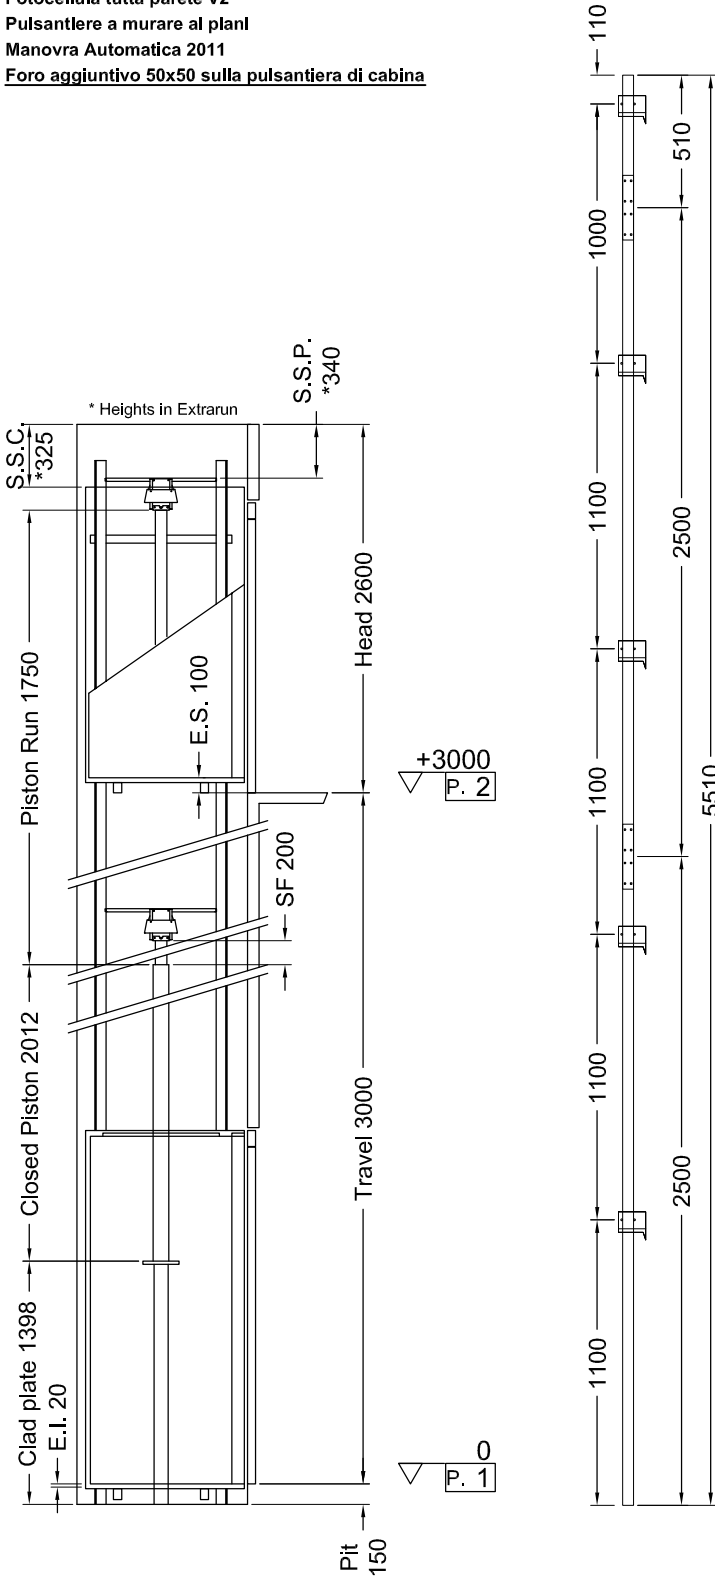

Indirect Installation		Speed 0,3 m/s	05/08/14 09.36 (V.2846)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 12276	P	(N) 481
N	(N) 510	N	(N) 8213
F1	(N) 1692	F1	(N) 2820
F2	(N) 398	F2	(N) 664
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 37,1
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 21,81
SF.	Piston extraction (mm) 200	Overpressure limit	(bar) 51,94
S.S.P.	Piston/head (mm) 340	Residual pressure	(bar) 1,25
S.S.C.	Cabin/head (mm) 325		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 5
Motor (V)	MF230V	Cables	Ø 9 mm 8-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	8000
Nominal current (A)	19	Min actual breaking load (N)	51000
Piston	START Homø 70x5x1750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	39		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
MACHINERY LOCATION			
At floor	1	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		
CABIN	CABIN ACCESSORIES		
Panels	Similinox F12PPS	Mirror	Seite B
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Seite B
Oper. panel	VERTICAL + additional cut 50x50 mm		
Floor	By Customer		
Ceiling	UNIVERSAL Led Strips - Griglio PPS1		
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Ditec			
Radlo controller			
Handles CASPIM			
Telephone			
Full height Infra-red curtain V2			
Floor Button Pad fixed to the Wall			
Automatic Control 2011			
Additional cut 50x50 mm on cabin COP			

The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

Final Drawings L. Del Bianco	1° STESURA 05/08/14
Final Drawings	
SCALE OUT OF SCALE	SHEET 2/2