


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1	2	3	Standard Rust-proof *	2000	2100	Rust-proof*	Absent		PM

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(\*) Smooth finish - No raised edges

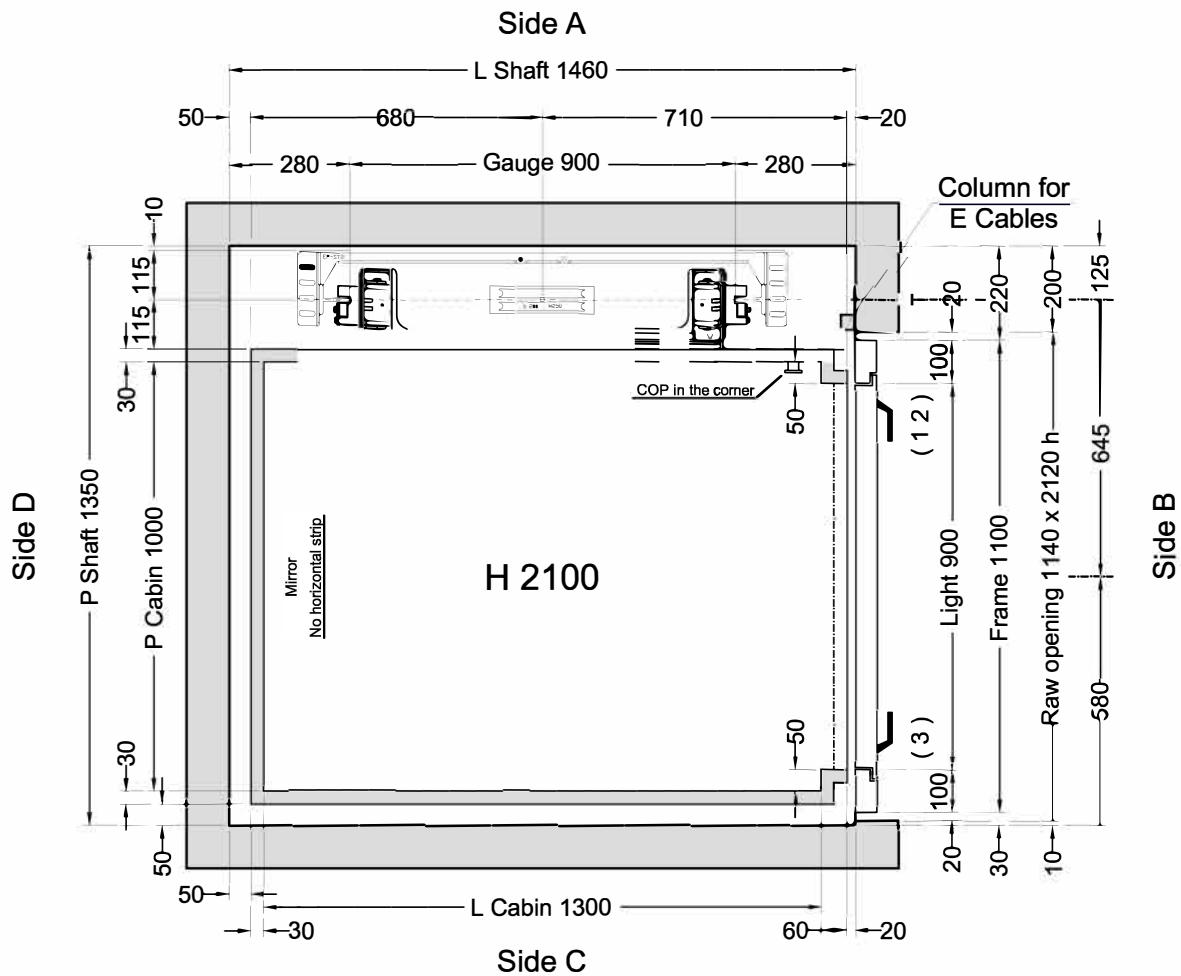

Feasibility n° 1986 - COP in the corner

**Stops: 3 - Doors: 3**


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1330 (L) x 1000 (P)** thks **20 mm** Weight: **23 kg**

ORDER	VERSIONS	Description	Designer	Date	Final Drawings	
ORDER NUMBER					Mod d	SHEET
<b>PS1641</b>					<b>ELFO</b>	<b>1/2</b>
		cernieratura porte, corsa a 6745	D.Ogliastro	23/05/2014		SHEET DIMENS.
			Final Drawings L. Del Bianco	1° STESURA 11/06/14		<b>A3</b>
			CAPACITY	AREA m²	CAPACITY	
			<b>350 kg</b>	<b>1,3</b>		

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie porte escluse dalla fornitura (porte senza fori maniglie)
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Pulsantiera a murare ai piani
- Manovra Automatica 2011

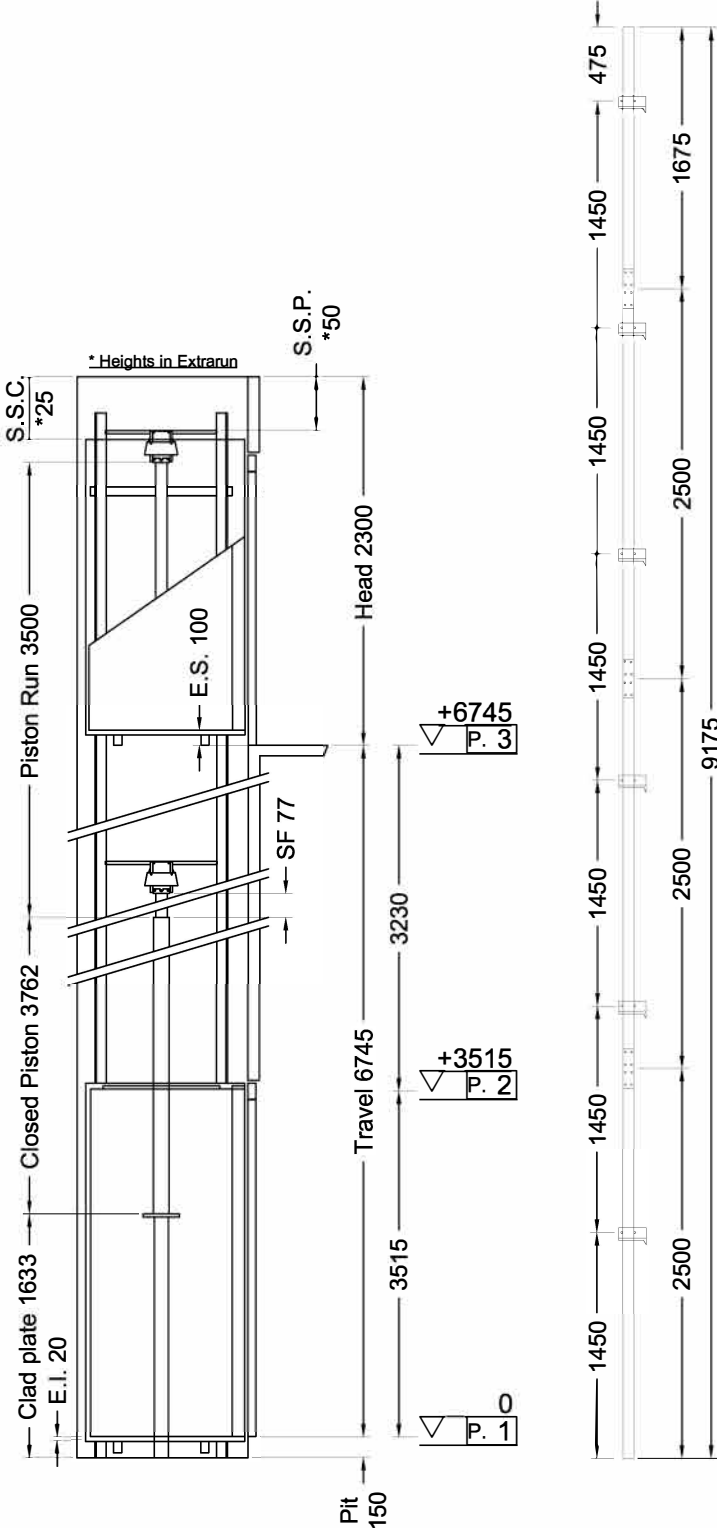

Indirect Installation	Speed 0,3 m/s	11/06/14 17.06 (V.2844) <sup>(2)</sup>	
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) 11486	P (N) 619	
N	(N) 817	N (N) 7856	
F1	(N) 1434	F1 (N) 2389	
F2	(N) 338	F2 (N) 563	
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) 20	Max static pressure (bar) 38,49	
E.S.	Extrarun above cabin (mm) 100	Min static pressure (bar) 20,65	
SF.	Piston extraction (mm) 77	Overpressure limit (bar) 53,89	
S.S.P.	Piston/head (mm) 50	Residual pressure (bar) 1,61	
S.S.C.	Cabin/head (mm) 25		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners T70-2A	
Motor (V)	MF230V	Brackets (Nr) 6	
Power (Kw)	2,9	Cables Ø 9 mm 6-(1+9+9)	
Corrente (A)	19	Cables length (mm) 2 x 12000	
Piston	START Homø 70x5x3500	Min actual breaking load (N) 47300	
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	9000		
Min hydraulic oil (L)	49		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
<b>MACHINERY LOCATION</b>			
At floor	3	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	Galvanized sheet	Mirror **	Side D
Finishes	Inox Scotch Brite		
Oper. panel	VERTICAL in the corner (Like finishes)		
Floor	By Customer		
Ceiling	SPOTS LED - Bianco A1 (** No horizontal strip)		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
False head device			
Doors without handles (and without holes for handles)			
Telephone by Lift Shop			
Full height infra-red curtain V2			
Floor Button Pad fixed to the Wall			
Automatic Control 2011			



ORDER	CLIENT	Final Drawings	1° STESURA
ORDER NUMBER		L. Del Bianco	11/06/14
		<b>Final Drawings</b>	
		SCALE	SHEET
		OUT OF SCALE	2/2