


FLOOR DOOR



Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
	1 2 3		Standard RAL 7042	2000	2100	Panoramic	Transparent			X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

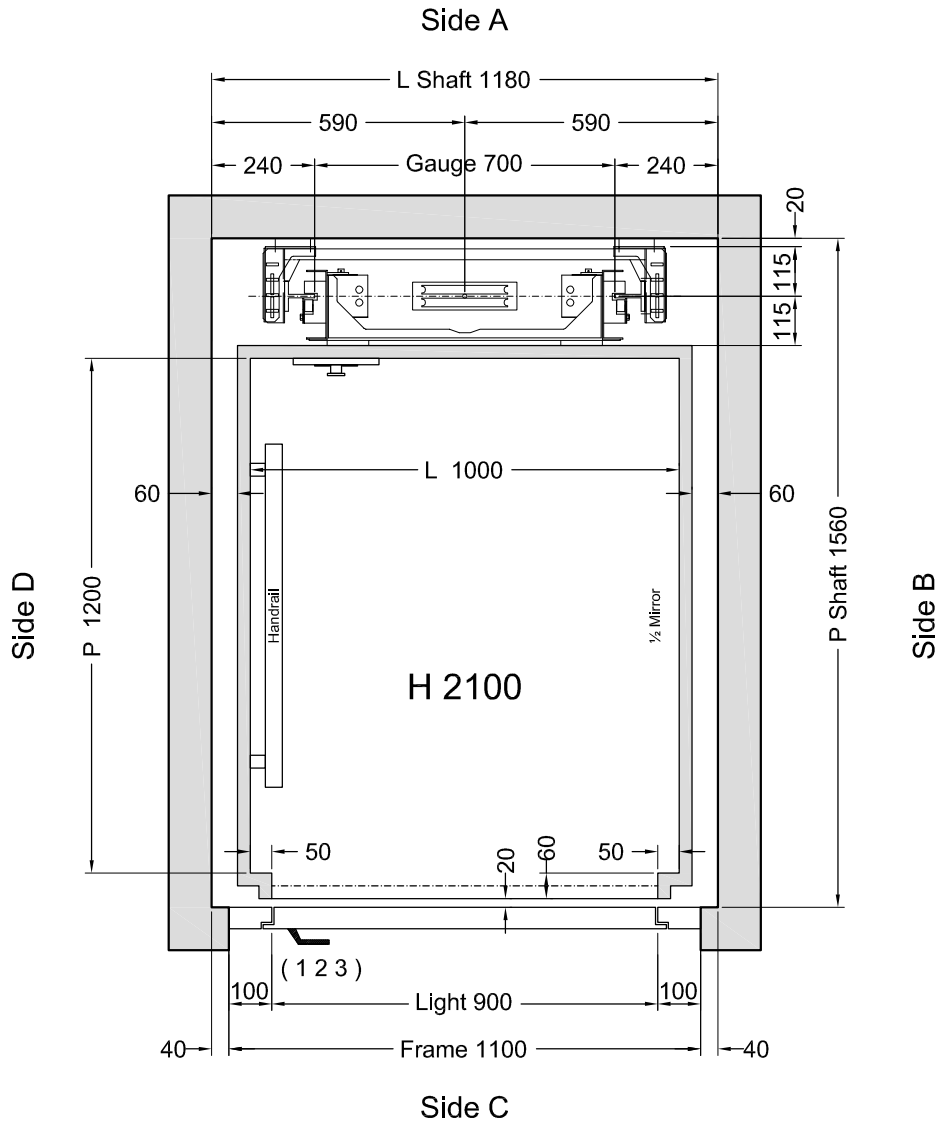


Stops: 3 - Doors: 3

Shaft on **Masonry (Muratura)**

	VERSIONS	Description	Designer	Date	
					Disegno Definitivo
		Corsa; Colori Cabina; Pulsantiera Cabina; Distanza locale macchine.	L.Del Bianco	06/05/2010	 SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5
			Disegno Definitivo L.Del Bianco	1° STESURA 06/05/10	
			CAPACITY 350 Kg	AREA m ² 1,2	CAPACITY

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Manovra Automatica
- Interruttore blocco porta quadro
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete

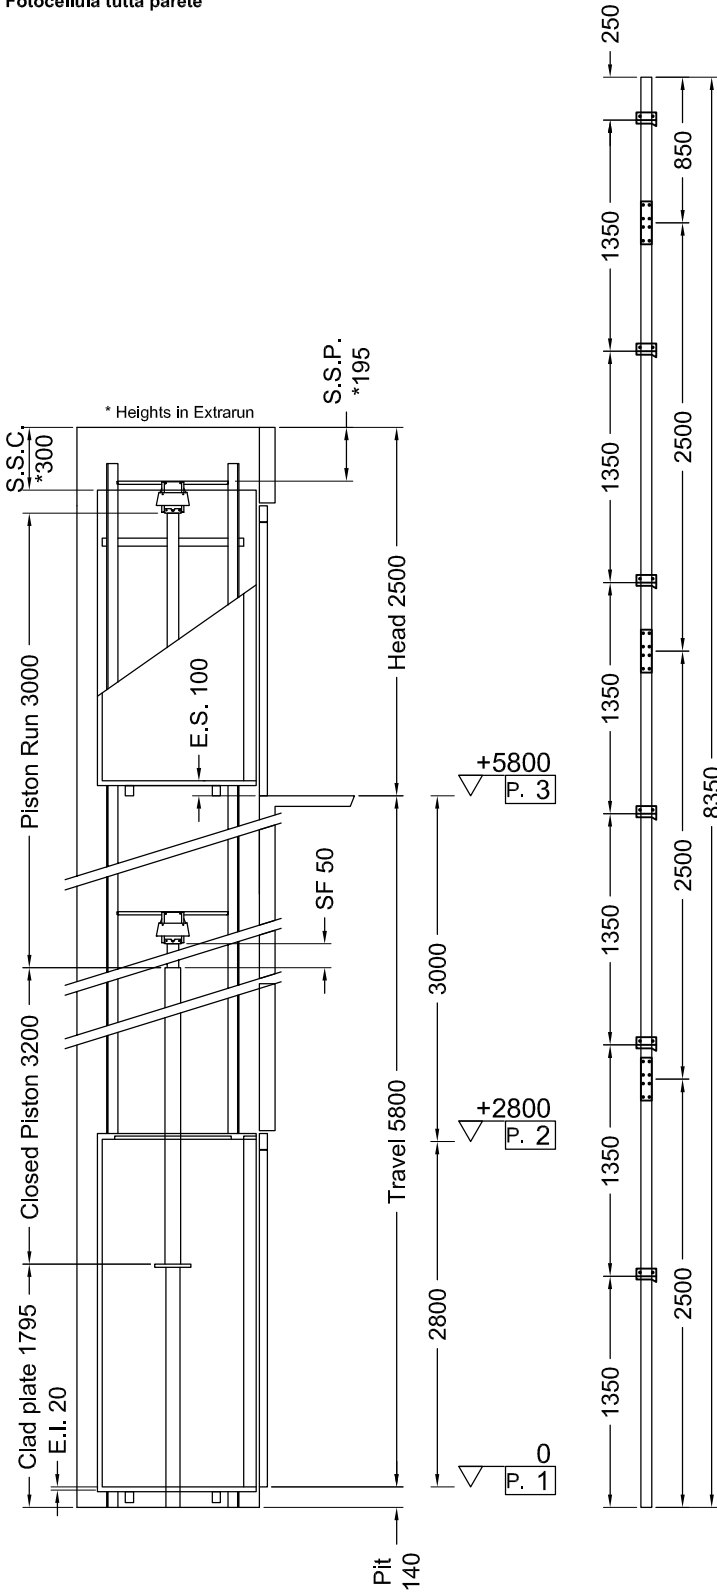

Indirect Installation	Speed 0,3 m/s	06/05/10 14.58 (V.2204)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10137	P	(N)	579
N	(N)	750	N	(N)	6929
F1	(N)	1638	F1	(N)	2731
F2	(N)	281	F2	(N)	468

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	33,88
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	16,03
SF.	Piston extraction (mm)	50	Overpressure limit (bar)	47,43
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,51
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	Start 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	10800
Piston	Start Elevator(ø) 70x5x3000	Min actual breaking load (N)	42100
Opt. oil position	basso		
Tubing	Start		
Tubing lenght (mm)	6000		
Min hydraulic oil (L)	50		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	Start	1/2"03026/01;03026/02	IMQ CA50.00526
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Away from shaft (mm)	2000
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Lamiera zincata	½ Mirror	Lati B
Finishes	Similinox F12PPS	Handrail	INOX S.B., Latl D
Oper. panel	VERTICAL Inox Scotch Brite		
Floor	ROCK SOLID 677		
Roof	FARETTI-Similinox F12PPS		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Double speed
 - Automatic control
 - Cabinet General switcher to enabling controller
 - Reinforced arcade
 - Handles CASPIM
 - Full height infra-red curtain

Le informazioni contenute nel presente disegno sono integrate dal manuale opere murarie.

		Disegno Definitivo	1° STESURA
		L. Del Bianco	06/05/10
		Disegno Definitivo	
		SCALE	SHEET
	OUT OF SCALE	2/2	