



## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1 2 R			Standard RAL 9007*	2000	2100	RAL 9007*	Absent		C2 - PM

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(\*) Smooth finish - No raised edges (No handles, no holes)

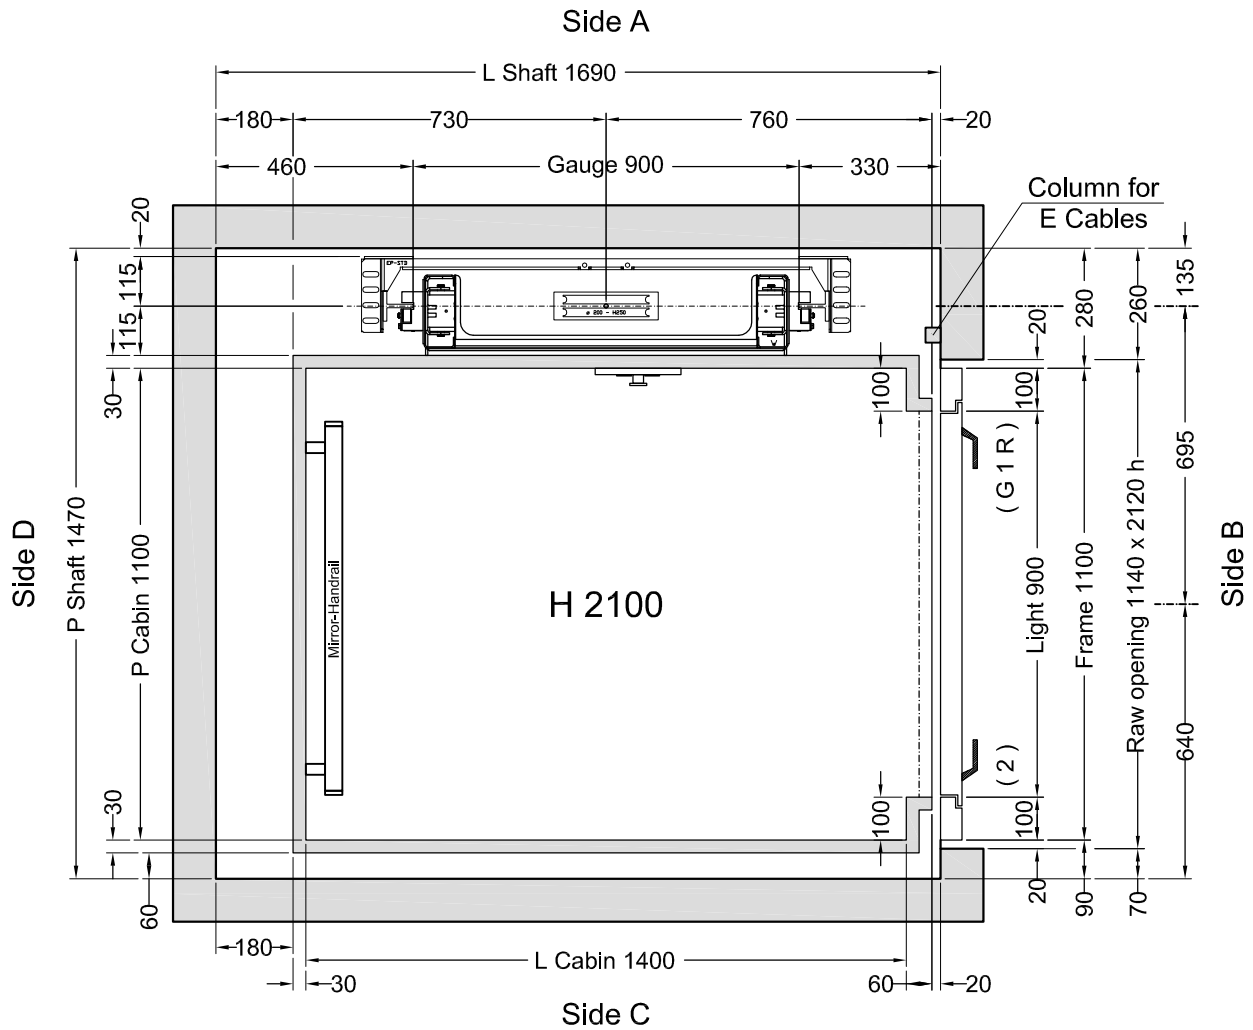

**Stops: 4 - Doors: 4**


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **20 mm** Weight: **27 kg**


	Description	Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/2
		D.Ogliastro	20/02/2014		SHEET DIMENS.
		L. Del Bianco	10/02/2014		A3
		Final Drawings L. Del Bianco	1° STESURA 04/03/14		SCALE 1:12.5
		CAPACITY 300 kg	AREA m <sup>2</sup> 1,54	CAPACITY	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie porte escluse dalla fornitura (porte senza fori maniglie)
- Telefono a cura Cliente
- Fotocellula tutta parete V2
- Pulsantiera a murare al piano
- Display ICARO In cabina
- Manovra Automatica 2011

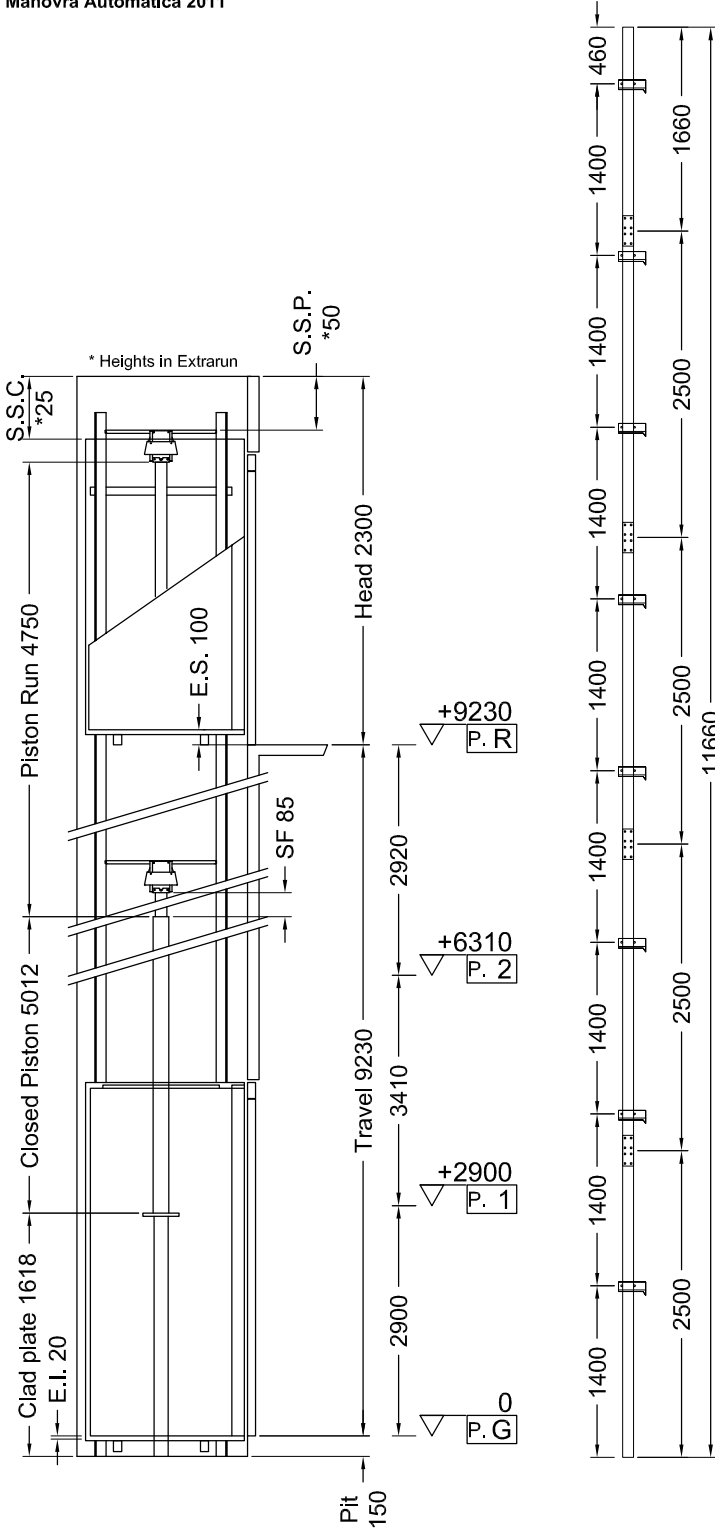

<b>Indirect Installaton</b>		Speed <b>0,3 m/s</b>	04/03/14 16.22 (V.2840) <span style="float: right;">(G)</span>
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) <b>13164</b>	P	(N) 1033
N	(N) <b>1038</b>	N	(N) 8781
F1	(N) <b>1700</b>	F1	(N) 2833
F2	(N) <b>398</b>	F2	(N) 664
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) <b>20</b>	Max static pressure	(bar) <b>39</b>
E.S.	Extrarun above cabin (mm) <b>100</b>	Min static pressure	(bar) <b>23,71</b>
SF.	Piston extraction (mm) <b>85</b>	Overpressure limit	(bar) <b>54,6</b>
S.S.P.	Piston/head (mm) <b>50</b>	Residual pressure	(bar) <b>2,68</b>
S.S.C.	Cabin/head (mm) <b>25</b>		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	<b>GMV HL 3010 (-*)</b>	Runners	<b>T70-2A</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>8</b>
Motor (V)	<b>MF230V</b>	Cables	$\varnothing$ <b>9 mm 8-(1+9+9)</b>
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x	<b>15000</b>
Corrente (A)	<b>19</b>	Min actual breaking load (N)	<b>51000</b>
Piston	<b>START Hom<math>\varnothing</math> 70x10x4750</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing lenght (mm)	<b>8000</b>		
Min hydraulic oil (L)	<b>55</b>		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	<b>LVT</b>	<b>LVT11</b>	<b>TUV DPD 010</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>TIEFFE</b>	<b>TIEFFE2000</b>	<b>IMQ I0110</b>
<b>MACHINERY LOCATION</b>			
At floor	<b>G</b>	Length of the hose travel	<b>2000 (mm)</b>
Cables enter in shaft: Side	<b>C</b>		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	<b>Galvanized sheet</b>	Mirror	<b>Side D</b>
Finishes	<b>Inox BA mecc.</b>	Handrail	<b>Inox Lucido, Side D</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>		
Floor	<b>By Customer</b>		
Ceiling	<b>SPOTS LED - SlimInox F12PPS</b>		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
False head device			
Doors without handles (and without holes for handles)			
<u>Telephone by Client</u>			
Full height infra-red curtain V2			
Floor Button Pad fixed to the Wall			
ICARO display In cabin			
Automatic Control 2011			



Final Drawings L. Del Bianco	1° STESURA 04/03/14
<b>Final Drawings</b>	
SCALE OUT OF SCALE	SHEET 2/2