
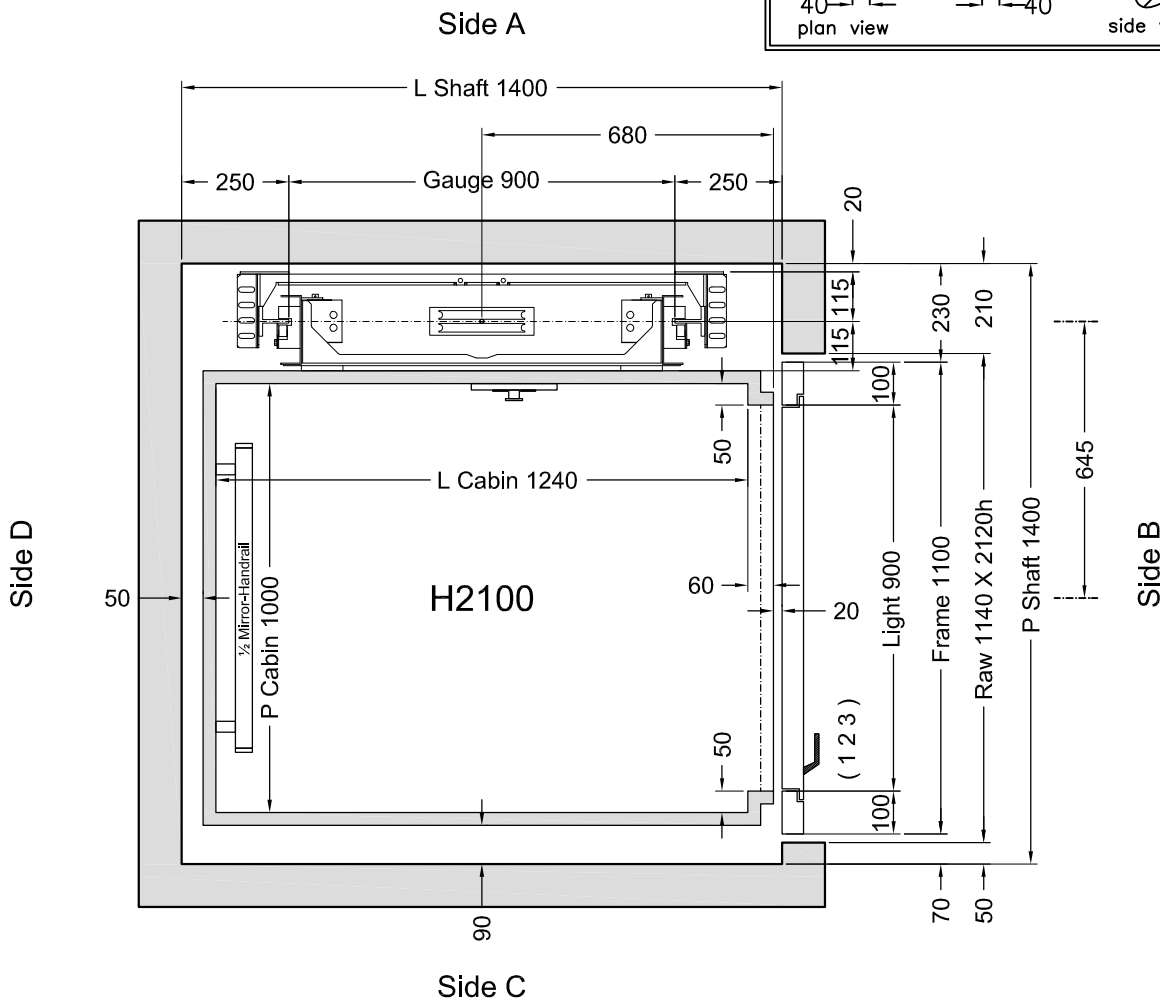


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1			EI 120 Rust-proof	2000	2100	Absent				X	X	
2 3			Standard Rust-proof	2000	2100	Panoramic	Transparent			X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

**Automatic
Control 2010
300 kg-0,30 m/s**

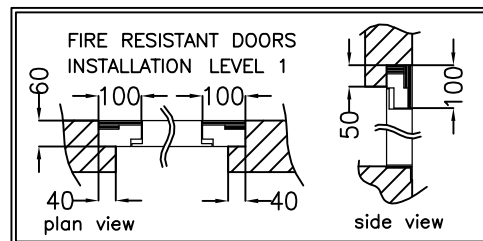


Customer own flooring: Dimensions **1270** (L) x **1000** (P) thks **15** mm Weight: **22** kg

Stops: 3 - Doors: 3
Shaft in **Masonry (Muratura)**

VERSIONS	Description		Designer	Date	Final Drawings
		locale macchina, dim. vano e dim. Cabina,ciellino	D.Ogliastro	19/12/2012	SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5
		Lato Meccanica; Corsa; L Vano; L.M; Corrimano; Porte.	L.Del Bianco	06/11/2012	
			Final Drawings D.Ogliastro	1° STESURA 19/12/12	
		CAPACITY	AREA m ²	CAPACITY	
		300 Kg	1,24		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Interruttore blocco porta quadro
- Maniglie CASPIM
- Telefono
- Fotocellula tutta parete
- Pulsantiera a murare al plani
- Comando automatico 2010

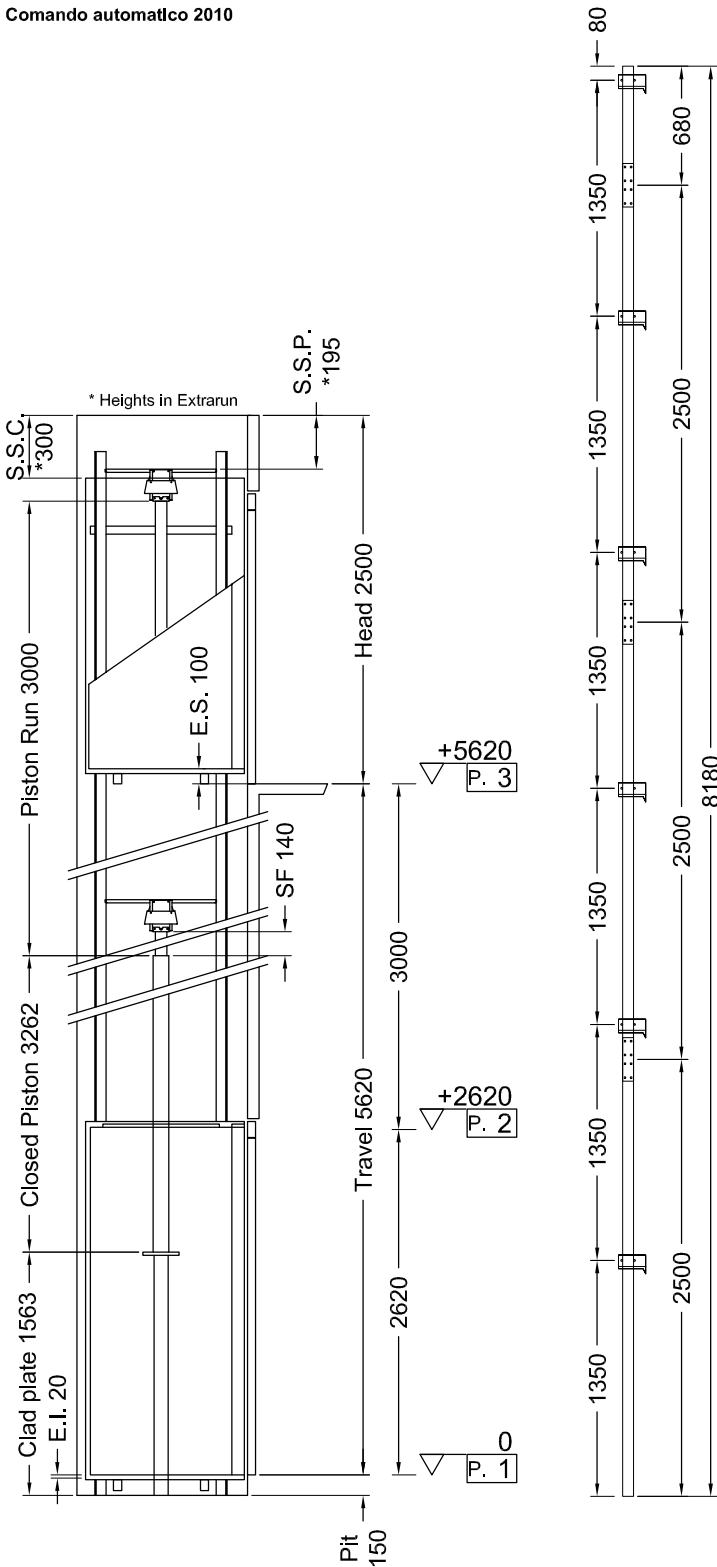

Indirect Installation	Speed 0,3 m/s	19/12/12 12.18 (V.2761)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10471	P	(N)	579
N	(N)	734	N	(N)	7136
F1	(N)	1418	F1	(N)	2363
F2	(N)	312	F2	(N)	520

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	34,53
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	19,23
SF.	Piston extraction (mm)	140	Overpressure limit (bar)	48,34
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,51
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Cables	9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables lenght (mm) 2 x	11000
Corrente (A)	19	Min actual breaking load (N)	42100
Piston	START Homø 70x5x3000	Tensile strenght N/mm ²	1570
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	9000		
Min hydraulic oil (L)	46		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT09	TUV DPD 004
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Kronenberg	DLF 1/7	TÜV ATV 13/7

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	C		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Lati D
Finishes	Inox BA (Lucido)	Handrail	INOX LUCIDO, Lati D
Oper. panel	VERTICAL		
Floor	By Customer		
Roof	DAMA - Blanco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Double speed
Cabinet General switcher to enabling controller
Handles CASPIM
Telephone
Full height infra-red curtain
Floor Button Pad fixed to the Wall
Automatic control 2010

The information contained in this drawing are completed by masonry manual rev.3

			Final Drawings	1° STESURA
			D. Ogliastro	19/12/12
				Final Drawings
			SCALE	SHEET
			OUT OF SCALE	2/2