


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1 2			Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

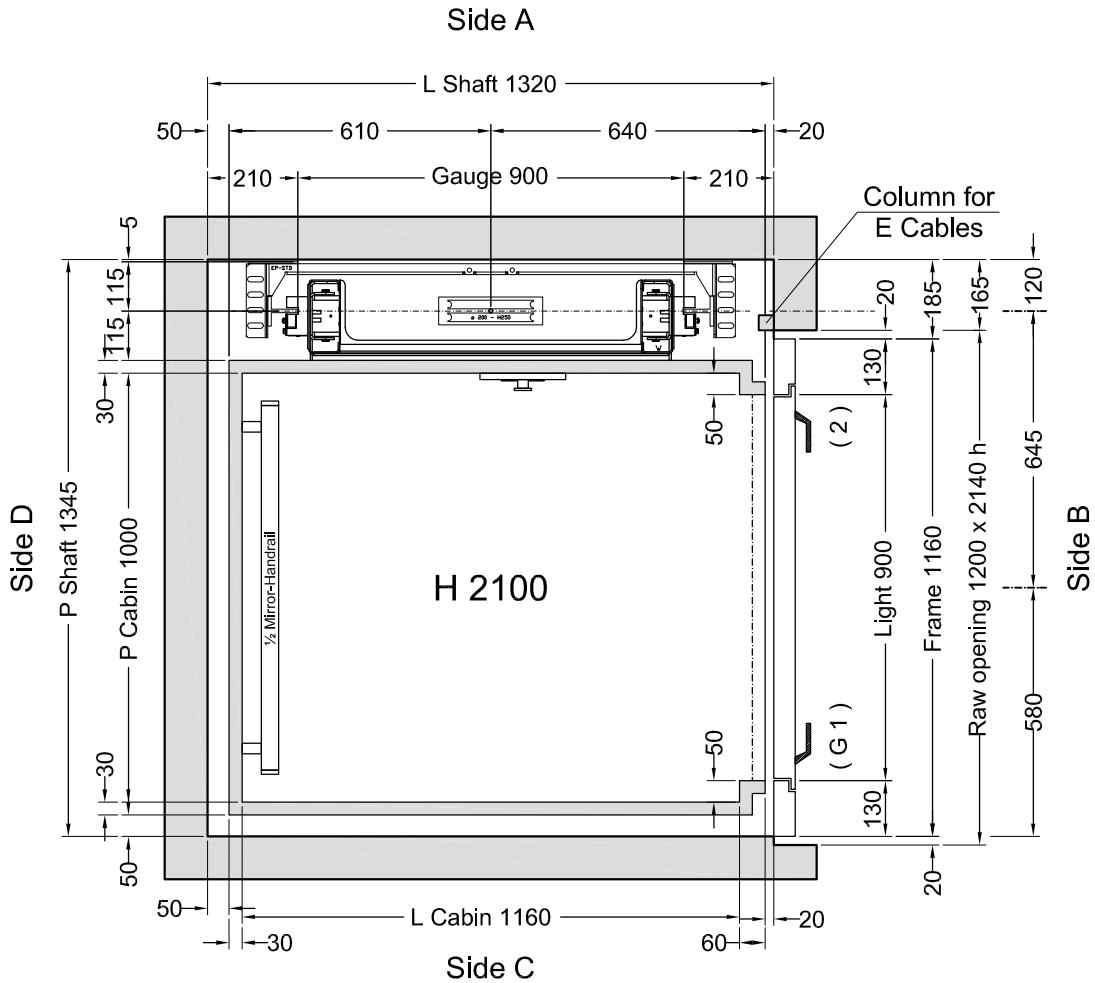

2
1
G

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1190 (L) x 1000 (P)** thks **15 mm** Weight: **20 kg**

			Designer	Date	Final Drawings	
					Model	SHEET
			L. Del Bianco	20/12/2013	Colamarino	19/12/2013
			Final Drawings	1° STESURA		
			L. Del Bianco	20/12/13		
			CAPACITY	AREA m ²	SCALE	
			300 kg	1,16	1:12.5	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsanti: G 1 2

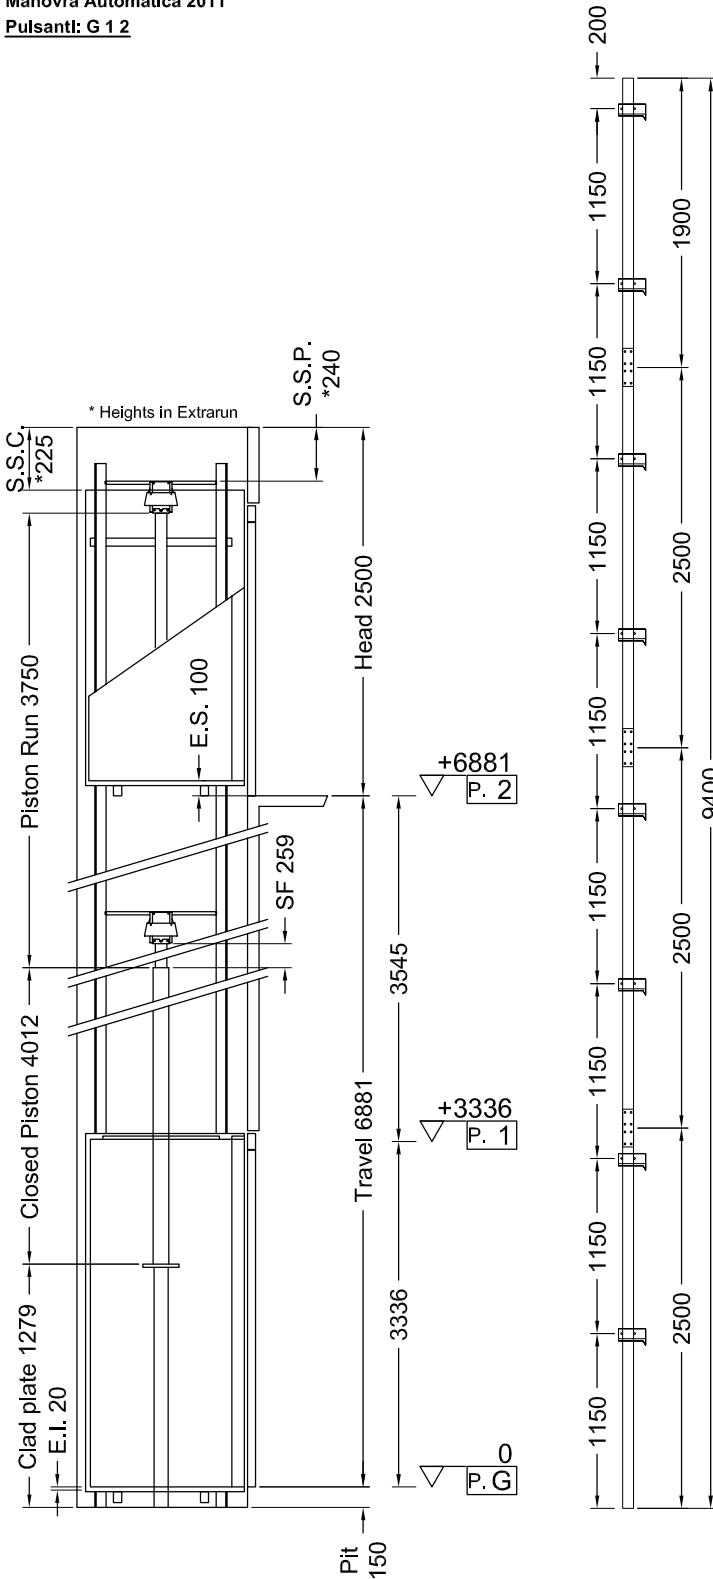

Indirect Installation	Speed 0,3 m/s	20/12/13 11.29 (V.2833)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10302	P	(N)	638
N	(N)	847	N	(N)	7077
F1	(N)	1265	F1	(N)	2109
F2	(N)	260	F2	(N)	434

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	34,36
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	19,07
SF.	Piston extraction (mm)	259	Overpressure limit (bar)	48,11
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,66
S.S.C.	Cabin/head (mm)	225		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 8
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	12000
Piston	START Homø 70x5x3750	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	11000		
Min hydraulic oil (L)	50		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	G	Length of the hose travel	7000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Inox Bronzo SB	½ Mirror	Side D
Finishes	Inox Bronzo SB	Handrail	Inox Satinato Bronzo, Side D
Oper. panel	VERTICAL Inox Bronzo SB (Like finishes)		
Floor	By Customer		
Roof	SPOTS LED - Blanco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
False head device
Handles CASPIM
Telephone by Lift Shop
Full height infra-red curtain V2
Automatic Control 2011
Buttons G 1 2



Final Drawings	1° STESURA
L. Del Bianco	20/12/13
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2