


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
12		G	Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

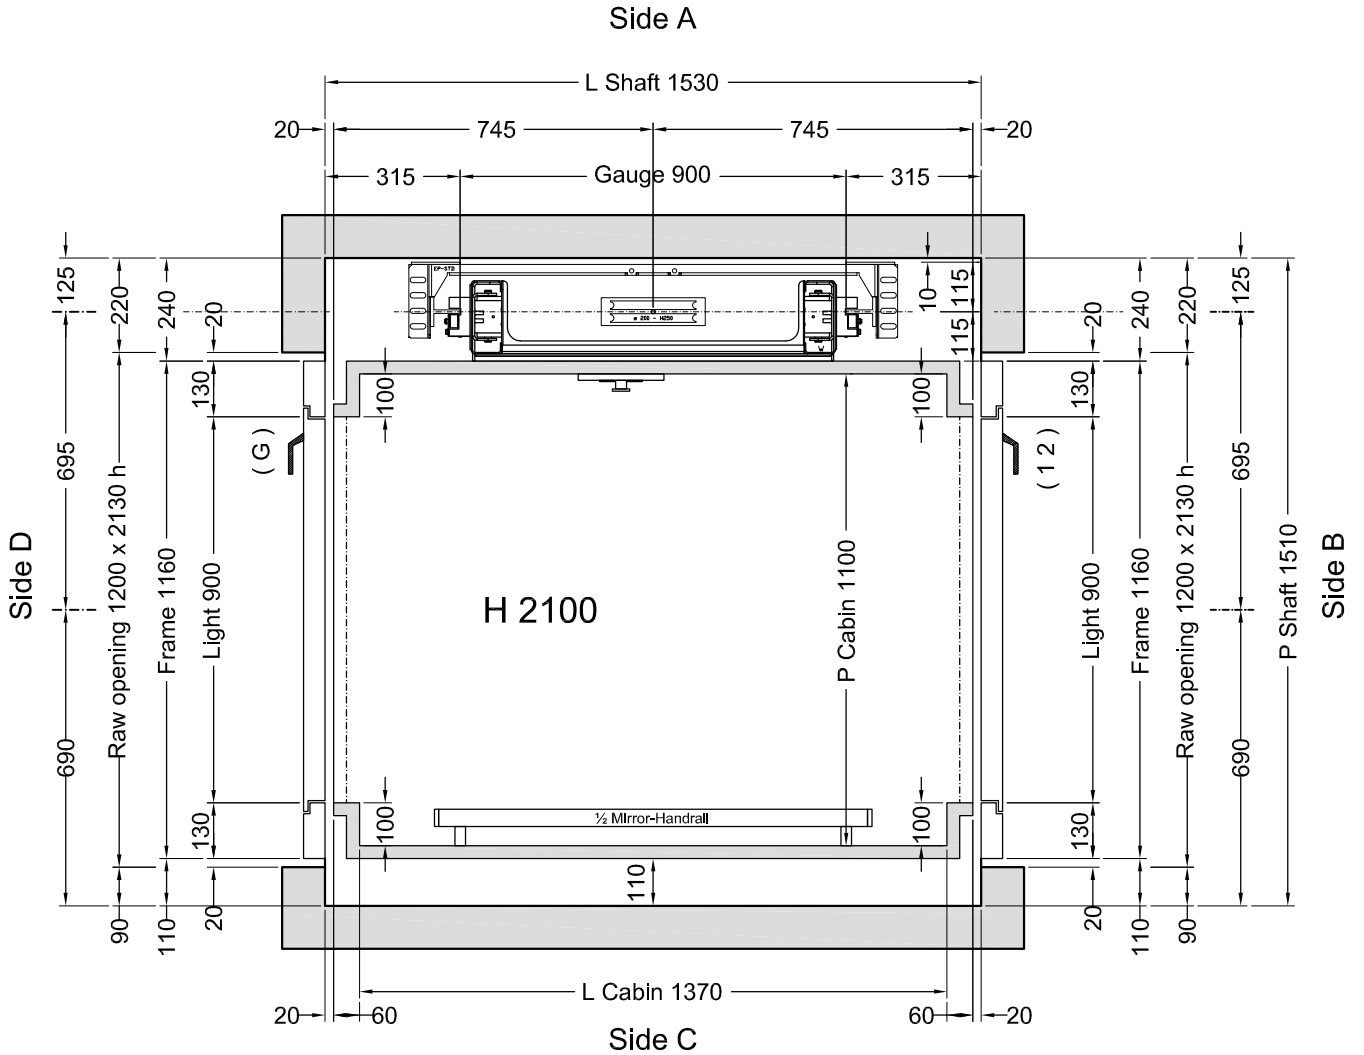

**Stops: 3 - Doors: 3**


Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **20 mm** Weight: **27 kg**


		Designer	Date	Final Drawings	
					Model <b>ELFO</b>
		L. Del Bianco	25/08/2014		SHEET DIMENS. <b>A3</b>
		L. Del Bianco	28/07/2014		SCALE <b>1:12.5</b>
		L. Del Bianco	25/06/2014		
		Final Drawings L. Del Bianco	1° STESURA 25/08/14		
		CAPACITY <b>300 kg</b>	AREA m <sup>2</sup> <b>1,51</b>	CAPACITY	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno al Piano 2 con tempo regolabile
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsanti Cabina: **G 1 2**

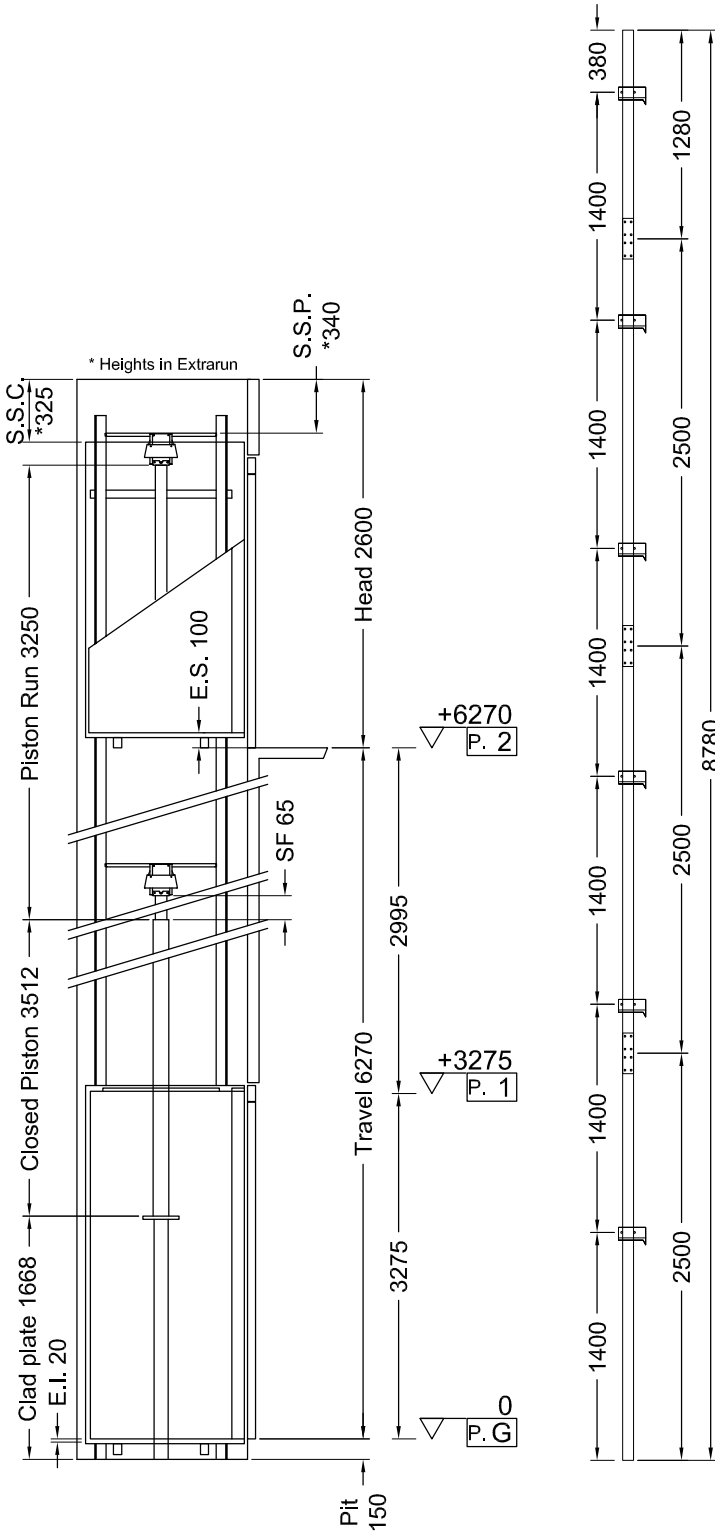

<b>Indirect Installation</b>		Speed <b>0,3 m/s</b>	25/08/14 16.02 (V.2846)
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) <b>11660</b>	P	(N) 599
N	(N) <b>783</b>	N	(N) 7957
F1	(N) <b>1583</b>	F1	(N) 2639
F2	(N) <b>390</b>	F2	(N) 651
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) <b>20</b>	Max static pressure	(bar) <b>35,17</b>
E.S.	Extrarun above cabin (mm) <b>100</b>	Min static pressure	(bar) <b>19,88</b>
SF.	Piston extraction (mm) <b>65</b>	Overpressure limit	(bar) <b>49,24</b>
S.S.P.	Piston/head (mm) <b>340</b>	Residual pressure	(bar) <b>1,56</b>
S.S.C.	Cabin/head (mm) <b>325</b>		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	<b>GMV HL 3010 (-*)</b>	Runners	<b>T70-2A</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>6</b>
Motor (V)	<b>MF230V</b>	Cables	Ø <b>9 mm 6-(1+9+9)</b>
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x	<b>12000</b>
Nominal current (A)	<b>19</b>	Min actual breaking load (N)	<b>47300</b>
Piston	<b>START Homø 70x5x3250</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>6000</b>		
Min hydraulic oil (L)	<b>47</b>		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>TIEFFE</b>	<b>TIEFFE2000</b>	<b>IMQ I0110</b>
<b>MACHINERY LOCATION</b>			
At floor	<b>G</b>	Length of the hose travel	<b>2000 (mm)</b>
Cables enter in shaft: Side	<b>B</b>		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	<b>Similinox F12PPS</b>	½ Mirror	<b>Side C</b>
Finishes	<b>Inox BA mecc.</b>	Handrail	<b>Inox Lucido, Side C</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>		
Floor	<b>By Customer</b>		
Ceiling	<b>LABIRINT Led Strips - Griglo PPS1</b>		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Automatic Return to Level 2 after adjustable time			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Automatic Control 2011			
Cabin Buttons: <b>G 1 2</b>			



Final Drawings	1° STESURA
L. Del Bianco	25/08/14
<b>Final Drawings</b>	
SCALE	SHEET
OUT OF SCALE	2/2