


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
G 1		B	Not Supplied by EP	2000	2110					X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

**Automatic  
Control 2010  
400 kg-0,30 m/s**

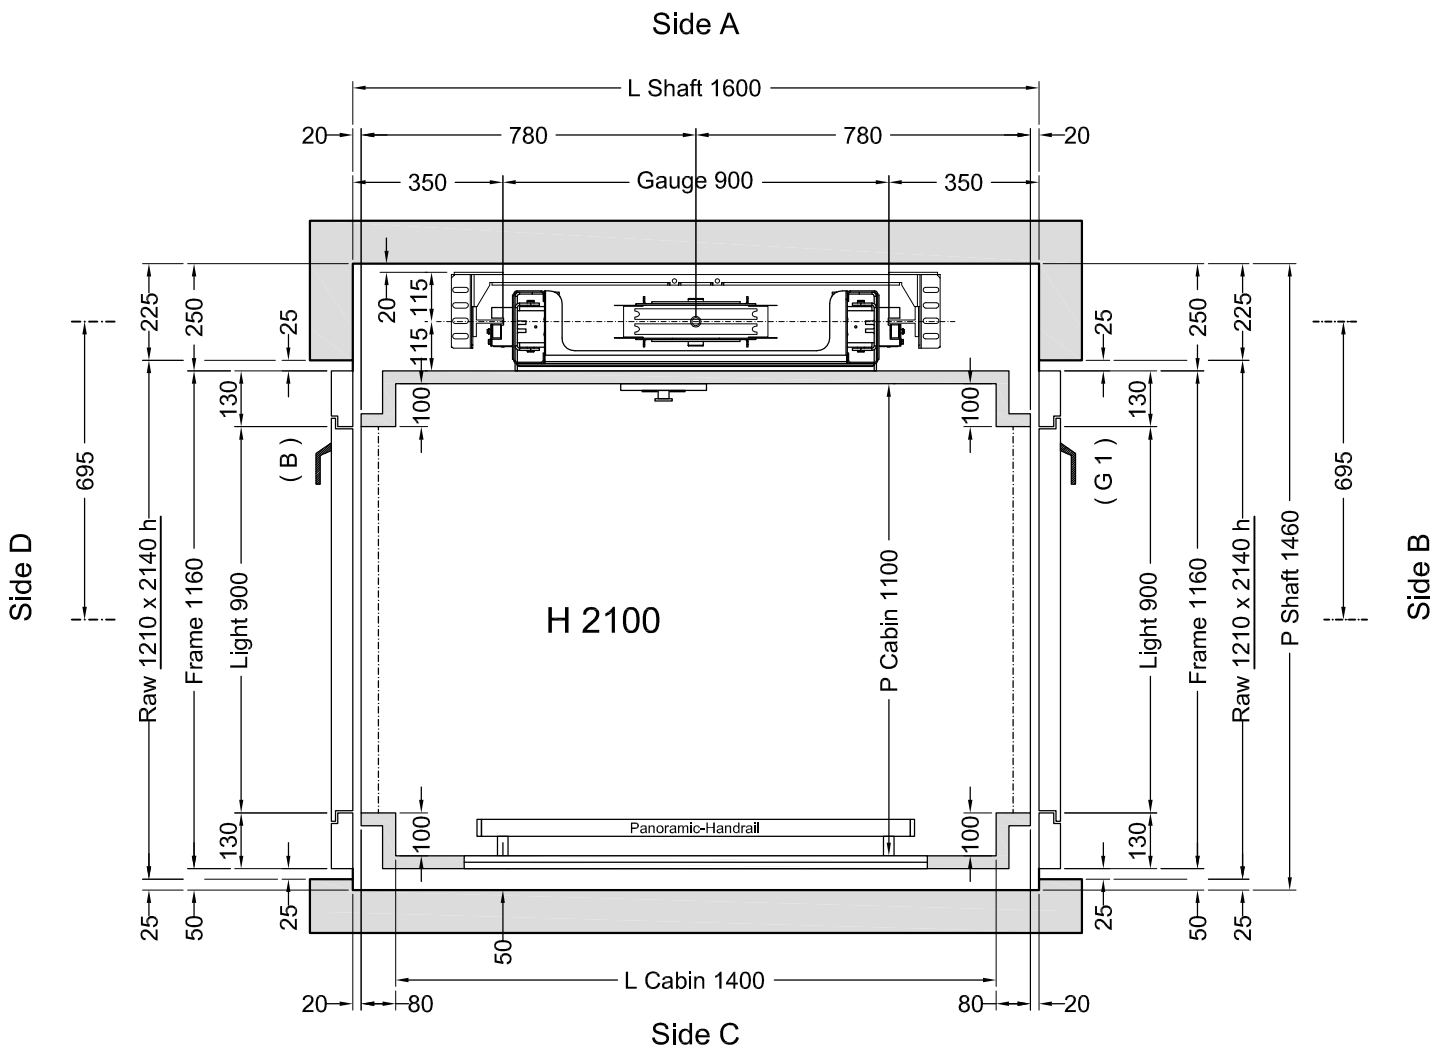

**Stops: 3 - Doors: 3**

Shaft in **Masonry (Muratura)**


Customer own flooring: Dimensions **1460 (L) x 1100 (P)** thks **20 mm** Weight: **27 kg**

1  
G  
B

OPDEP	Description	Designer	Date	Final Drawings
		L.Del Bianco	19/12/2012	SHEET 1/2 SHEET DIMENS. <b>A3</b> SCALE 1:12.5
		L.Del Bianco	11/12/2012	
		Final Drawings L.Del Bianco	1° STESURA 19/12/12	
		CAPACITY 400 kg	AREA m <sup>2</sup> 1,54	CAPACITY

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Ritorno al Piano 1 con tempo regolabile
- Predispuesto per combinatore telefonico della Lift Shop
- Dispositivo falsa testata
- Maniglie CASPIM
- Fotocellula tutta parete
- Pulsanti di piano Braille (B, G 1)
- Comando automatico ai piani
- Elfo XL

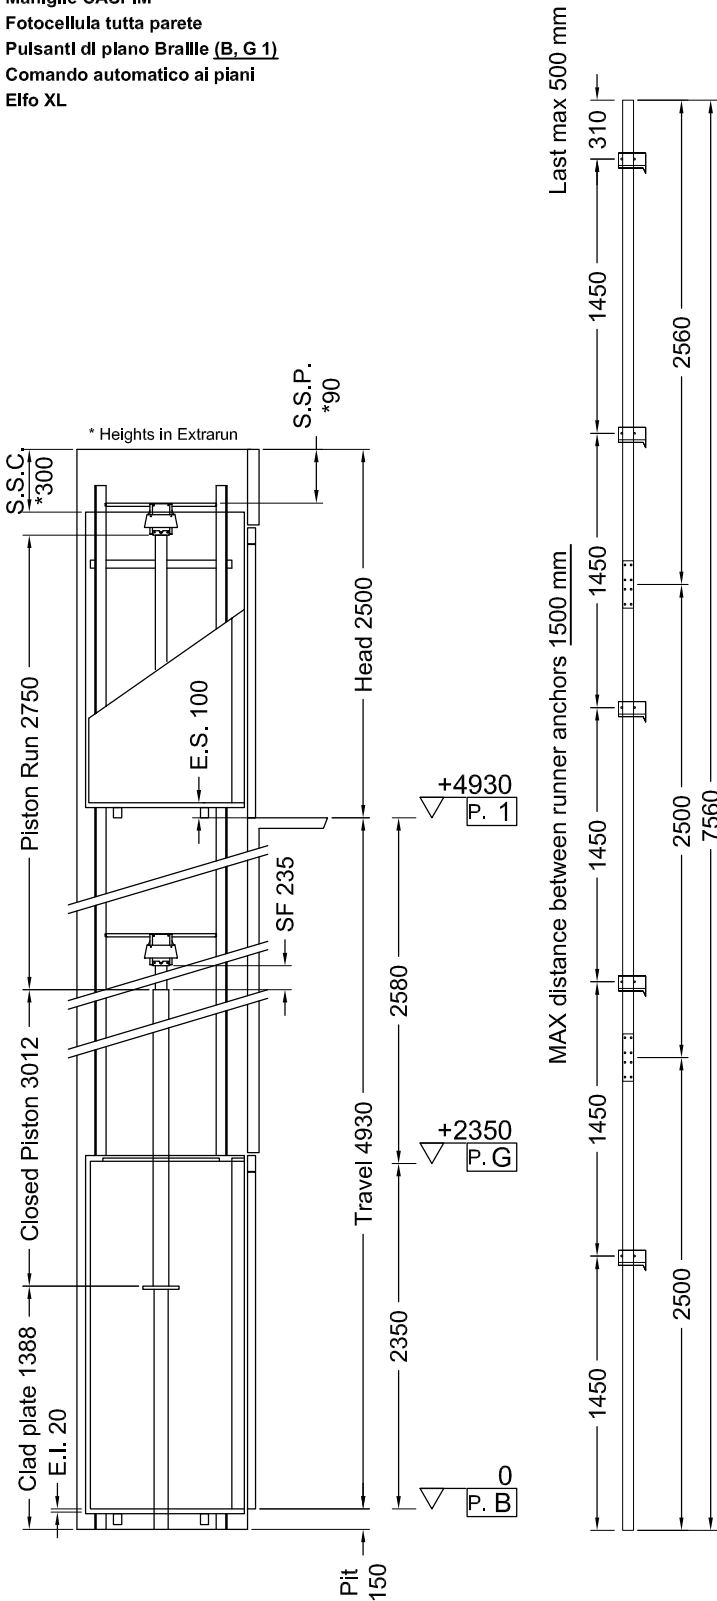

Indirect Installaton	Speed 0,3 m/s	19/12/12 14.45 (V.2761)
----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12311	P	(N)	609
N	(N)	673	N	(N)	8272
F1	(N)	1573	F1	(N)	2622
F2	(N)	406	F2	(N)	677

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	41,31
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,92
SF.	Piston extraction (mm)	235	Overpressure limit (bar)	57,84
S.S.P.	Piston/head (mm)	90	Residual pressure (bar)	1,58
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 5
Motor (V)	MF230V	Cables	11 mm 6-(1+9+9)
Power (Kw)	2,9	Cables lenght (mm) 2 x	10000
Corrente (A)	19	Min actual breaking load (N)	70700
Piston	START Homø 70x5x2750	Tensile strenght N/mm²	1770
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	7000		
Min hydraulic oil (L)	44		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	B	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Panoramic	Side C
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side C
Oper. panel	VERTICAL	Outside covering	Side C
Floor	By Customer	Outside finishing	Inox Scotch Brite
Roof	SPOTS LED - Inox BA (Lucido)		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
  - Guides dimension 2.5 m
  - Manual pump
  - Manostat with overweight signal
  - Double speed
  - Return to level 1 after adjustable time
  - Prepared for Autodlaler by Lift Shop
  - False head device
  - Handles CASPIM
  - Full height Infra-red curtain
  - Landing buttons Braille (B, G 1)
  - Automatic call to floors
  - Elfo XL

The information contained in this drawing are completed by masonry manual rev.3

		Final Drawings L. Del Bianco	1° STESURA 19/12/12
		<b>Final Drawings</b>	
		SCALE OUT OF SCALE	SHEET 2/2