


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1	2	3	Excluded from delivery	2000	2110	Absent						

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Automatic Control
2008

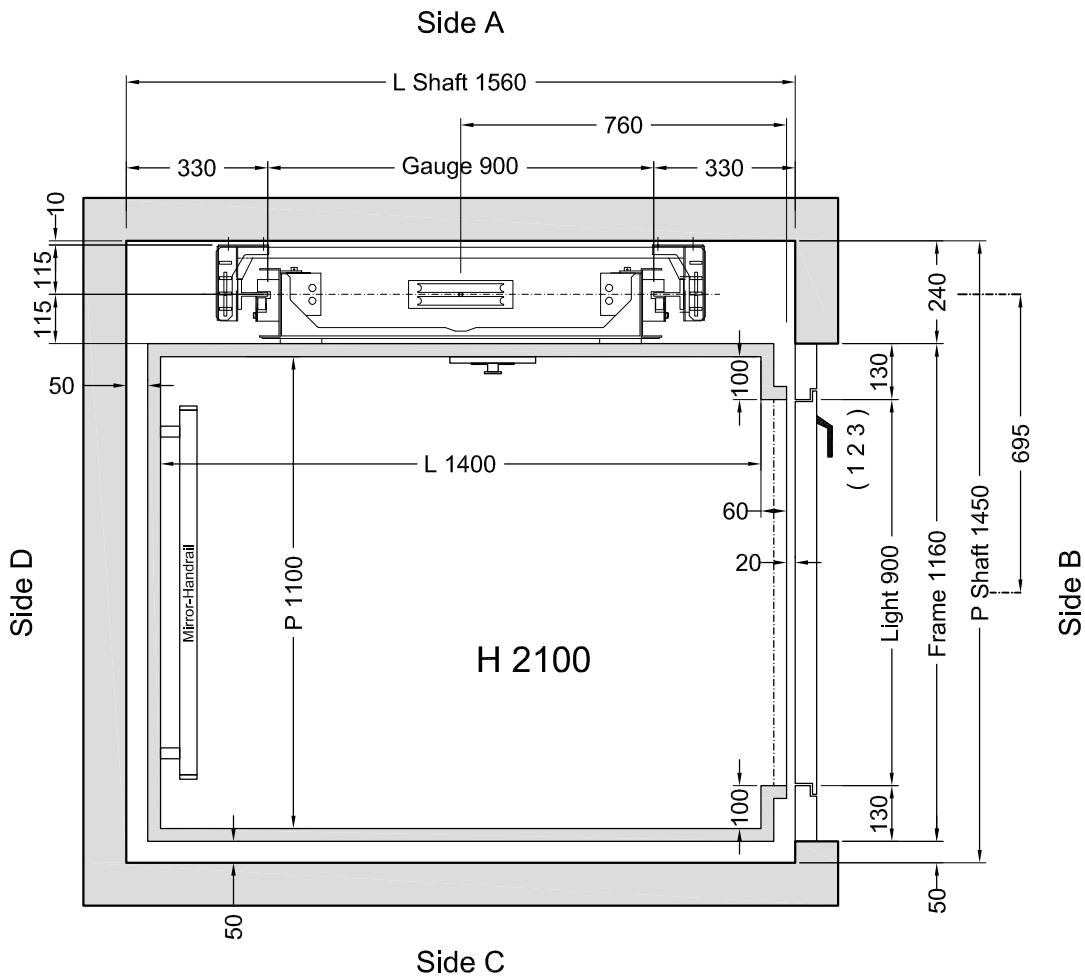


Stops: 3 - Doors: 3

Shaft on **Masonry (Muratura)**

	VERSIONS	Description	Designer	Date	Final Design Drawings
					 SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5
		Corsa; Pavimento; Soffitto; Illuminazione; Tolle maniglie Caspin; Dist. L.M..	L.Del Bianco	06/12/2010	
			Final Design Drawings L.Del Bianco	1° STESURA 10/09/10	
			CAPACITY 350 Kg	AREA m ² 1,54	CAPACITY

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Manovra Automatica 2008
- Ritorno piano basso con tempo regolabile
- Arcata rinforzata
- Fotocellula tutta parete

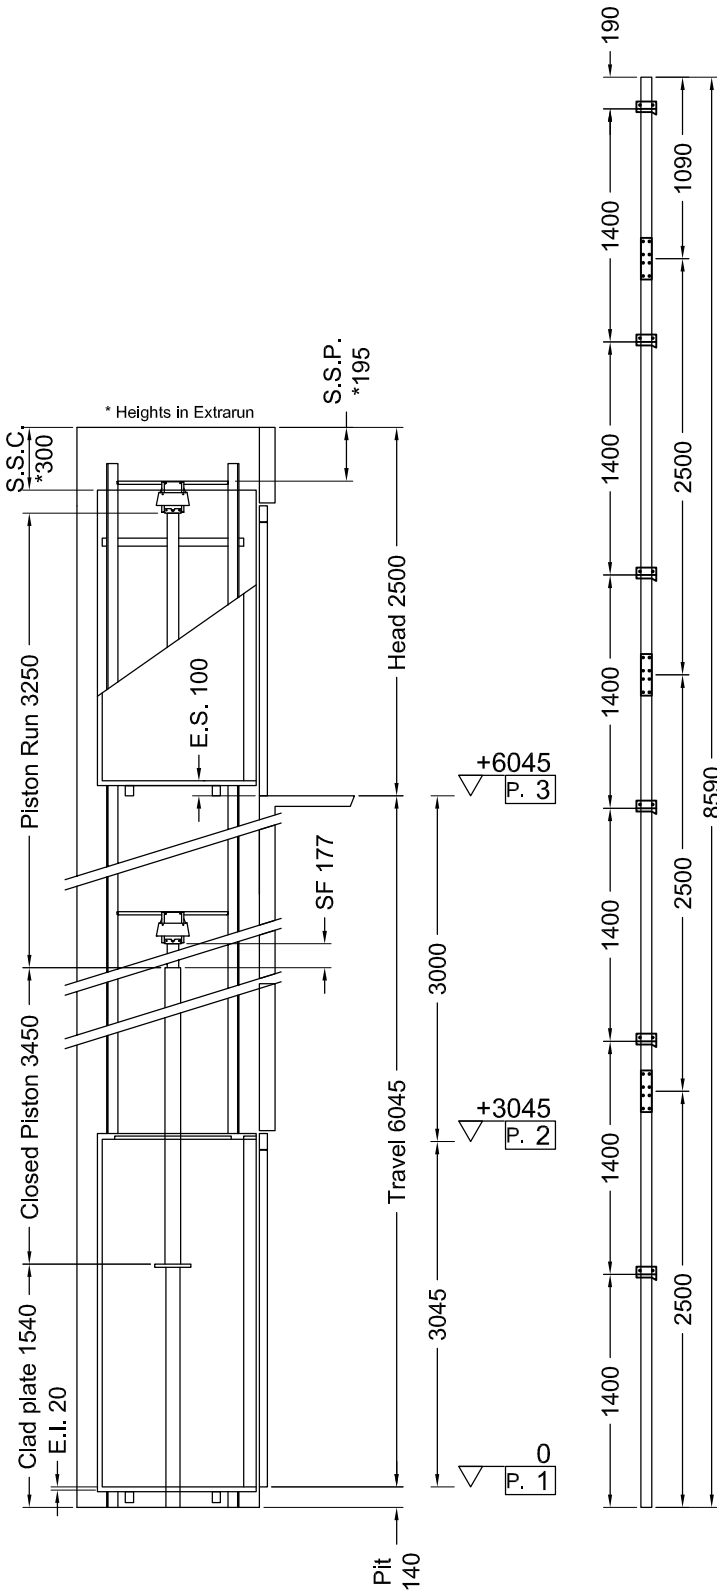

Indirect Installation	Speed 0,3 m/s	06/12/10 09.01 (V.2303)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11332	P	(N)	599
N	(N)	771	N	(N)	7727
F1	(N)	1682	F1	(N)	2803
F2	(N)	434	F2	(N)	723

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	36,2
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	18,36
SF.	Piston extraction (mm)	177	Overpressure limit (bar)	50,68
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	START 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets (Nr)	6
Motor (V)	MF230V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	11100
Piston	START Home (ø) 70x5x3250	Min actual breaking load (N)	42100
Opt. oil position	basso		
Tubing	3/4" R1 FD+FD GAS		
Tubing lenght (mm)	6000		
Min hydraulic oil (L)	33,3		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START	1/2"03026/01;03026/02	IMQ CA50.00526
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Mirror	Lati D
Finishes	Inox BA (Lucido)	Handrail	ALLUMINIO, Latl D
Oper. panel	VERTICAL		
Floor	ROCK SOLID 616		
Roof	UNIVERSAL-Inox BA (Lucido)		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Double speed
 - Automatic control 2008
 - Return to the lower floor after adjustable time
 - Reinforced arcade
 - Full height infra-red curtain

L'approvazione del presente disegno vale anche come avvenuta consegna del manuale opere murarie rev.3.

		Final Design Drawings	1° STESURA
		L. Del Bianco	10/09/10
		Final Design Drawings	
		SCALE	SHEET
	OUT OF SCALE	2/2	