


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	1 2 3		Not Supplied by EP	2000	2110				C2



C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

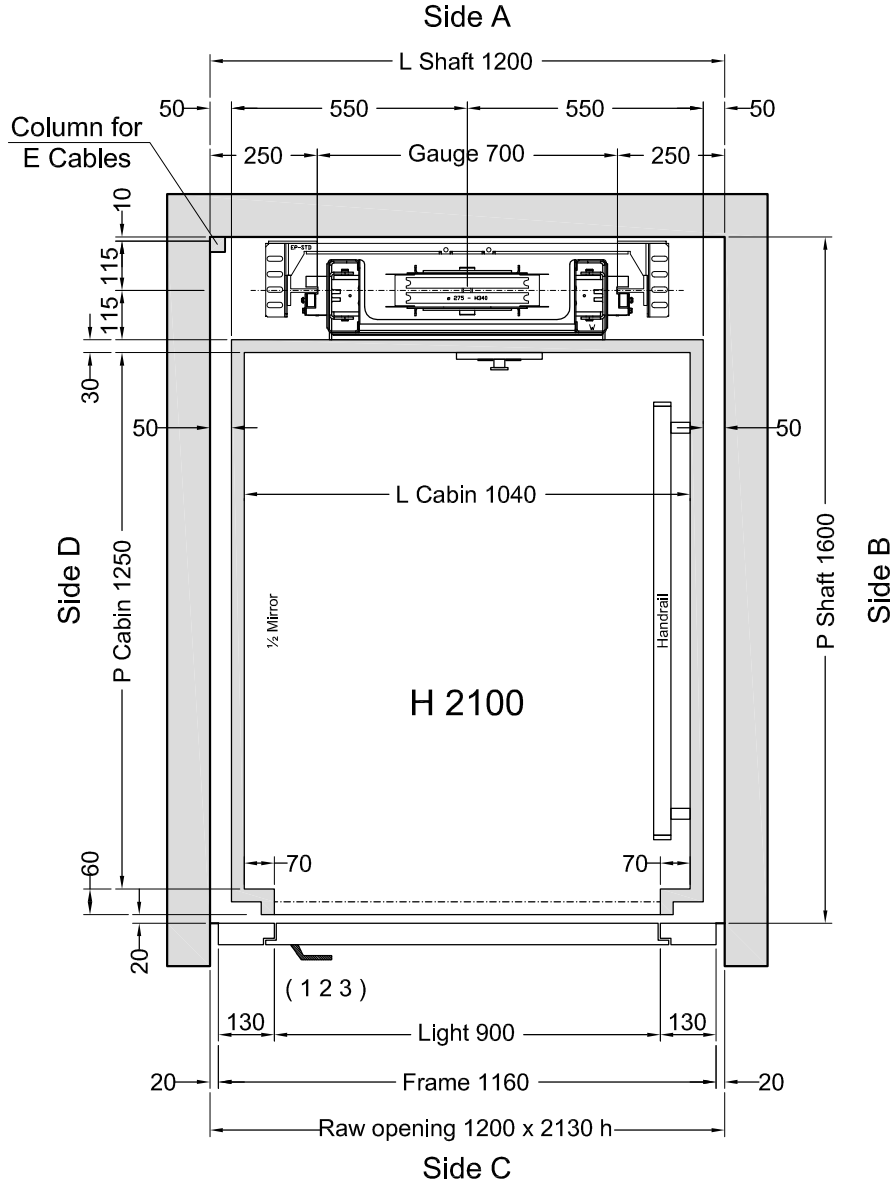

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1040 (L) x 1280 (P)** thks **15 mm** Weight: **23 kg**

VERSIONS	Description	Designer	Date	Final Drawings	
					Model ELFO
	Finiture cabina e tetto - lunghezza tubazione	Colamarino	08/11/2013		SHEET DIMENS. A3
					SCALE 1:12,5
		CLIENT Lift Shop	Final Drawings L. Del Bianco	1° STESURA 13/12/13	
PLACE OF INSTALLATION		CAPACITY 300 kg	AREA m ² 1,3	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

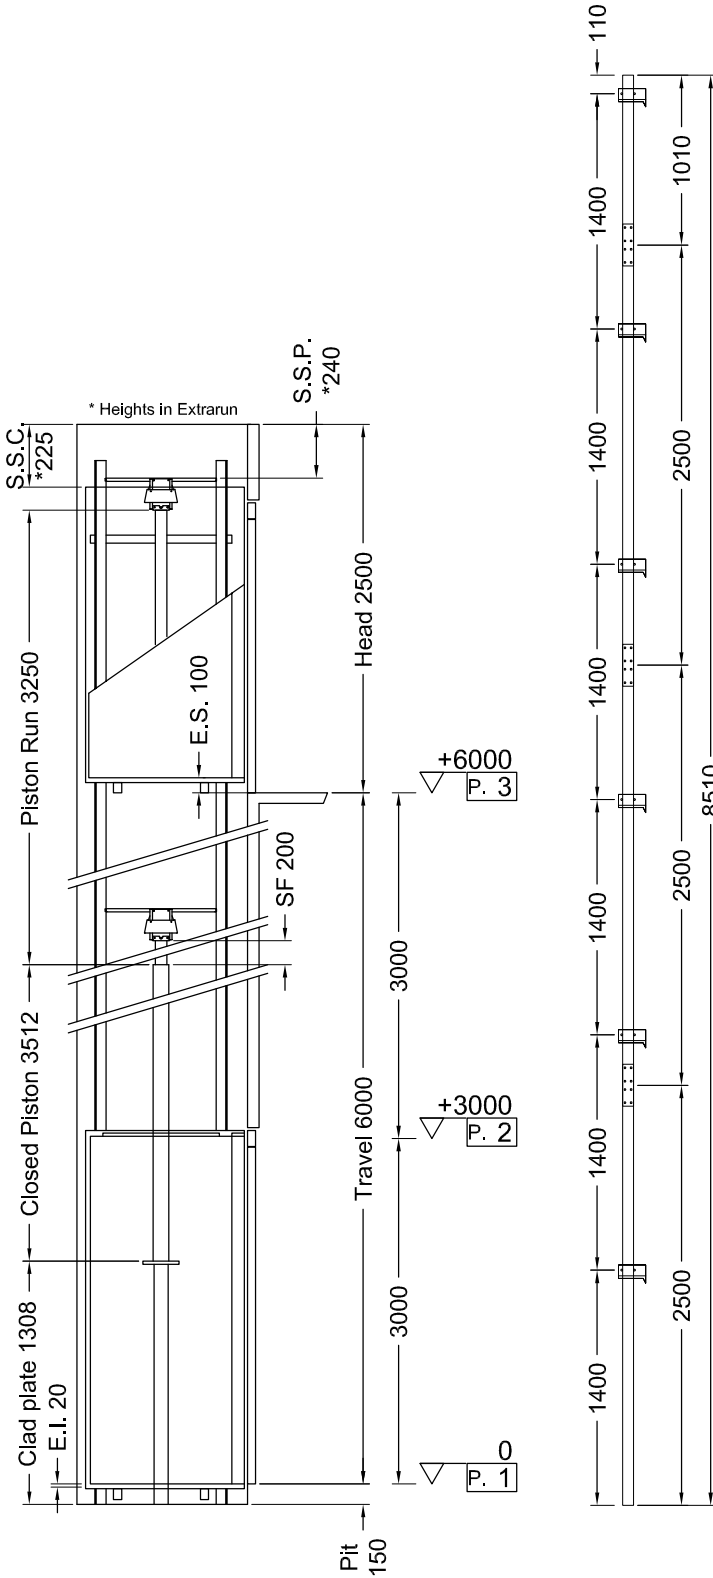

Indirect Installation	Speed 0,3 m/s	13/12/13 10.00 (V.2833)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11004	P	(N)	648
N	(N)	768	N	(N)	7456
F1	(N)	1656	F1	(N)	2760
F2	(N)	248	F2	(N)	414

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,45
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,15
SF.	Piston extraction (mm)	200	Overpressure limit (bar)	49,63
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,68
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	11000
Piston	START Homø 70x5x3250	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	12000		
Min hydraulic oil (L)	48		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Length of the hose travel	8000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Simlinox F12PPS	½ Mirror	Side D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Roof	SPOTS LED - Simlinox F12PPS		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
False head device
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011




Final Drawings	L. Del Bianco	1° STESURA	13/12/13
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/2

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	1 2 3		Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

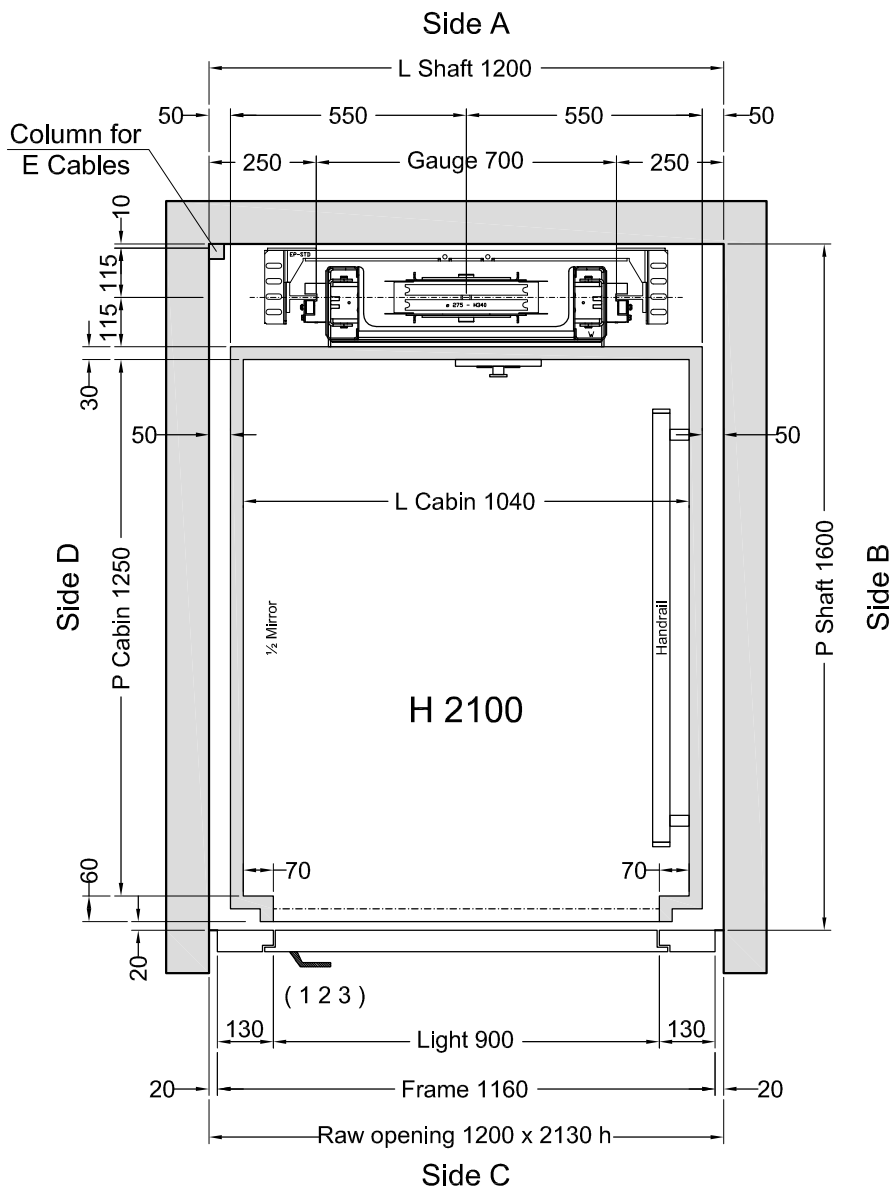

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1040 (L) x 1280 (P)** thks **15 mm** Weight: **23 kg**

	VERSIONS	Description	Designer	Date	Final Drawings	
		Finiture cabina e tetto - Lunghezza tubazione	Colamarino	08/11/2013		SHEET DIMENS. A3
			Final Drawings L. Del Bianco	1° STESURA 13/12/13		SCALE 1:12,5
			CAPACITY	AREA m ²	CAPACITY	
			300 kg	1,3		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

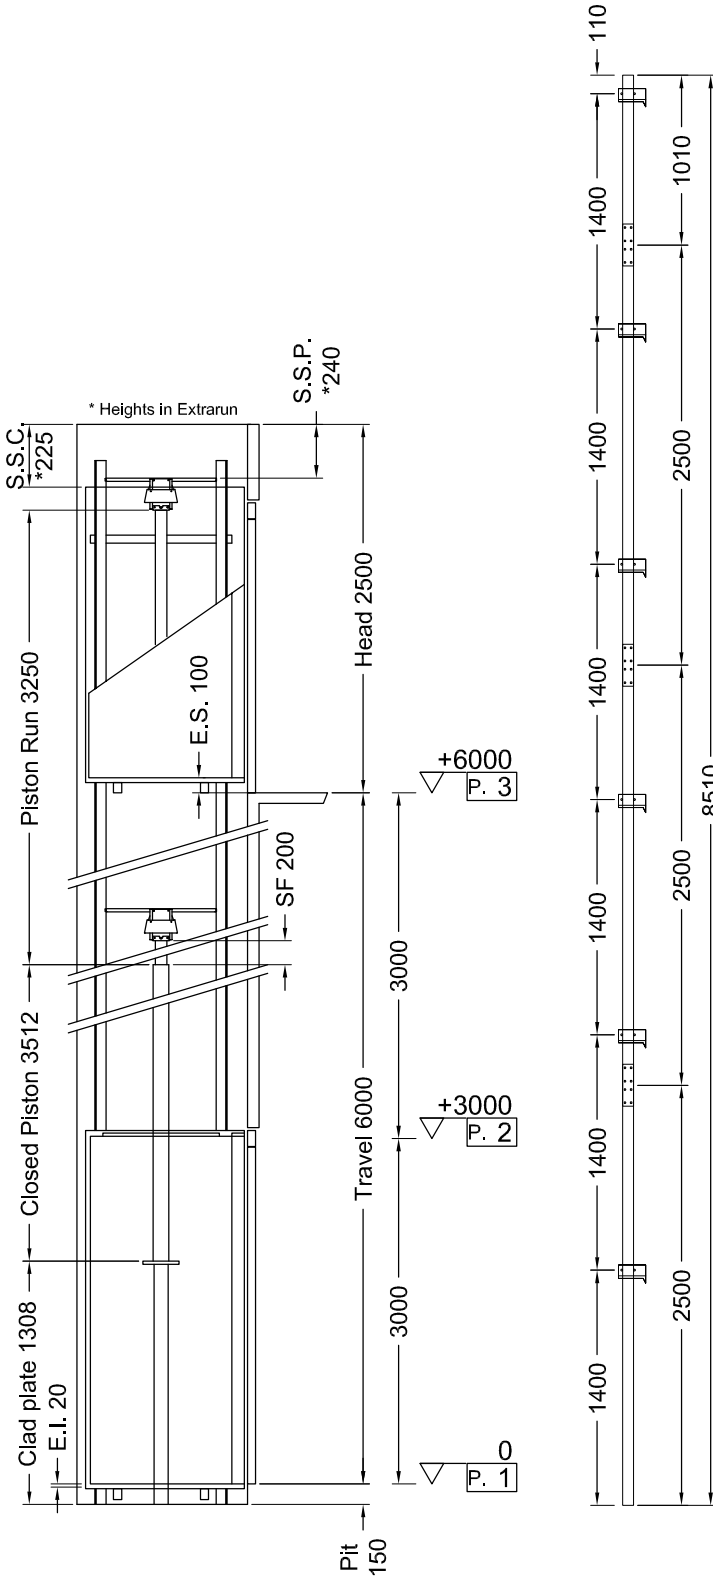

Indirect Installation	Speed 0,3 m/s	13/12/13 09.28 (V.2833)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11004	P	(N)	648
N	(N)	768	N	(N)	7456
F1	(N)	1656	F1	(N)	2760
F2	(N)	248	F2	(N)	414

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,45
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,15
SF.	Piston extraction (mm)	200	Overpressure limit (bar)	49,63
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,68
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	11000
Piston	START Homø 70x5x3250	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	12000		
Min hydraulic oil (L)	48		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Length of the hose travel	8000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Side D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Roof	SPOTS LED - Similinox F12PPS		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
False head device
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011


The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

		Final Drawings	1° STESURA
		L. Del Bianco	13/12/13
		Final Drawings	
	SCALE	OUT OF SCALE	SHEET
			2/2

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2 4	Not Supplied by EP	2000	2110		Absent		C2
		3	Not Supplied by EP	2000	2110		Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

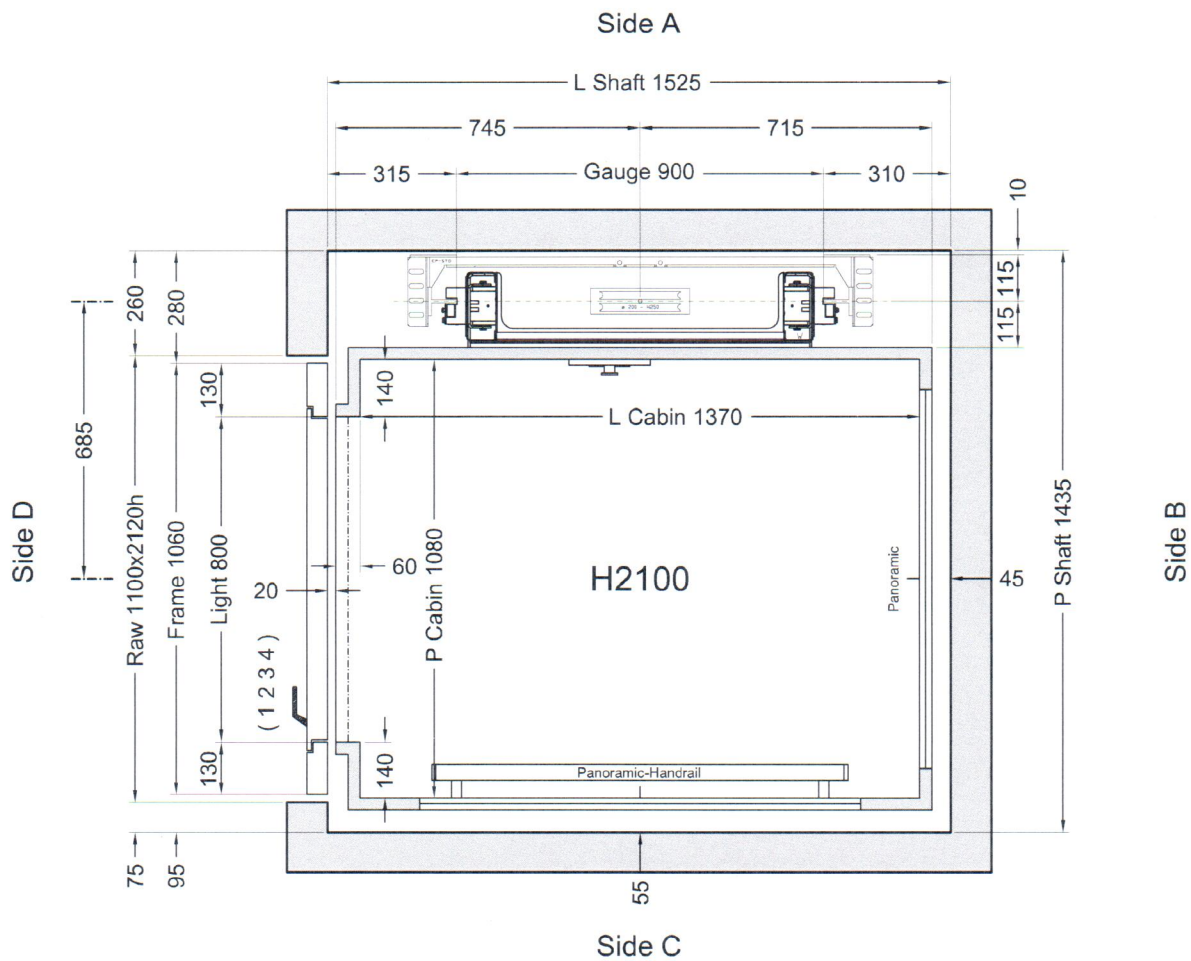

Customer own flooring: Dimensions **1400 (L) x 1080 (P)** thks **15 mm** Weight: **22 kg**

Stops: 4 - Doors: 4

Shaft in **Masonry (Muratura)**

VERSIONS	Description	Designer	Date	Preliminary Drawings Final	
				Model	SHEET
				ELFO	1/2
	portata, dim. Vano, dim. Cabina, cernieratura porte, panoramica sul lato C, corsa a 8660	D. Ogliastrò	06/02/2014		SHEET DIMENS.
		Preliminary Drawings L. Del Bianco	1ª STESURA 25/07/13		SCALE
		CAPACITY	AREA m ²	CAPACITY	
		300 Kg	1,48		



ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Telefono da Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

Indirect Installation Speed **0,3 m/s** 18/02/14 11.26 (V.2840) (C)

THRUST DURING NORMAL OPERATION THRUST OF SAFETY DEVICE INTERVENT.

P	(N)	12596	P	(N)	697
N	(N)	1005	N	(N)	8705
F1	(N)	1661	F1	(N)	2768
F2	(N)	375	F2	(N)	625

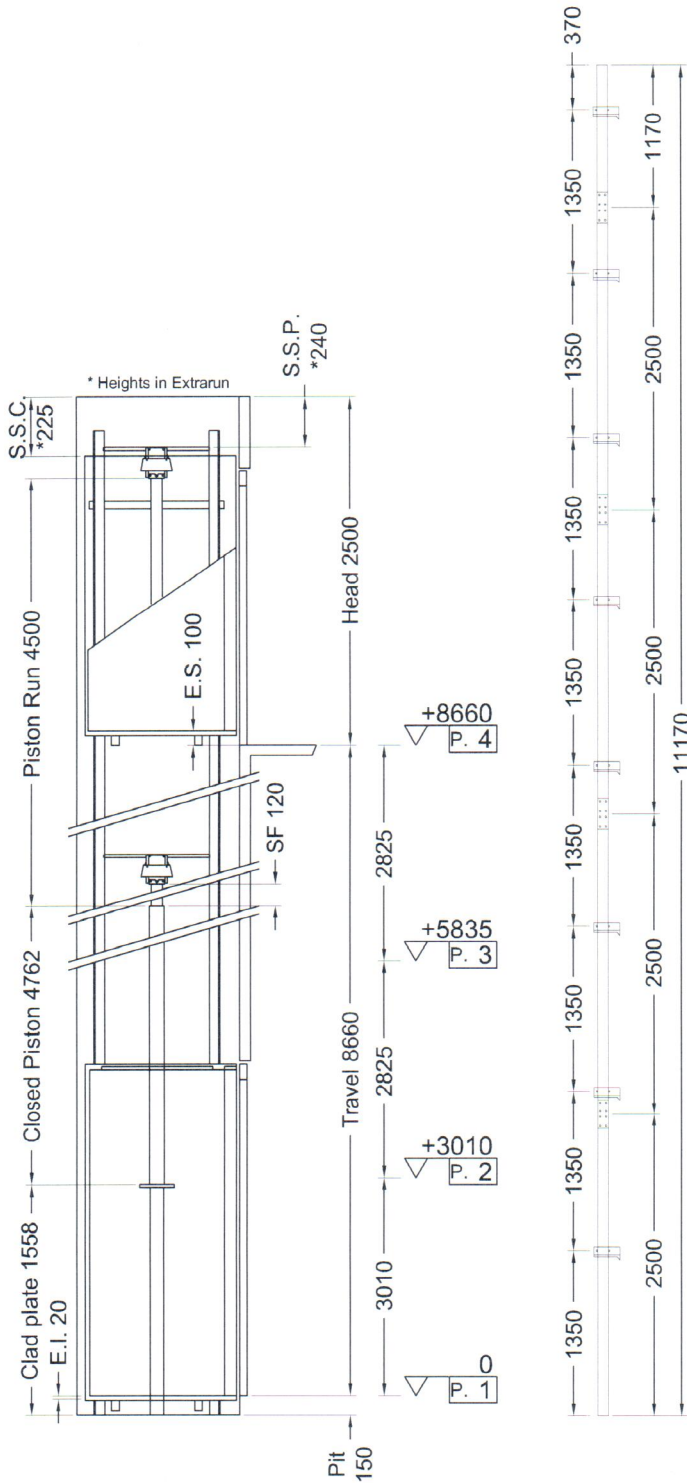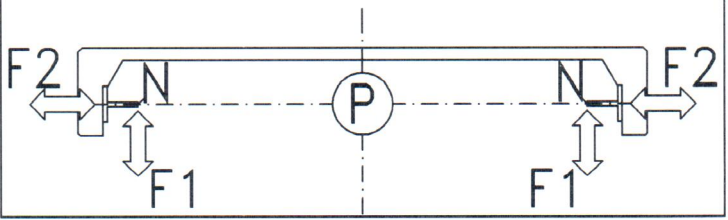

MACHINERY LOCATION

At floor	1	Length of the hose travel	7000 (mm)
Cables enter in shaft: Side	A	Hydraulic unit model	.*

CABIN CABIN ACCESSORIES

Panels	Austenit fumè	Panoramic	Lati B,C
Finishes	Inox BA mecc.	Handrail	INOX LUCIDO, Lati C
Oper. panel	VERTICAL	Outside covering	Side B,C
Floor	By Customer	Outside finishing	Similinox F12PPS
Ceiling	SPOTS LED - Inox BA (Lucido)		

OTHER ACCESSORIES

- Enabling key for the cabin button pad, double insertion
- Guides dimension 2.5 m
- Manual pump
- Manostat with overweight signal
- Two speed
- False head device
- Telephone by Lift Shop
- Full height infra-red curtain V2
- Automatic Control 2011

~~The approval of this plan serves also as confirmation of delivery of the masonry manual rev.4. | See masonry manual rev.4~~



Preliminary Drawings	1° STESURA
L. Del Bianco	25/07/13
Preliminary Drawings Final	
SCALE	SHEET
OUT OF SCALE	2/2