


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1 2 3			EXCLUDED FROM DELIVERY	2000	2110							

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

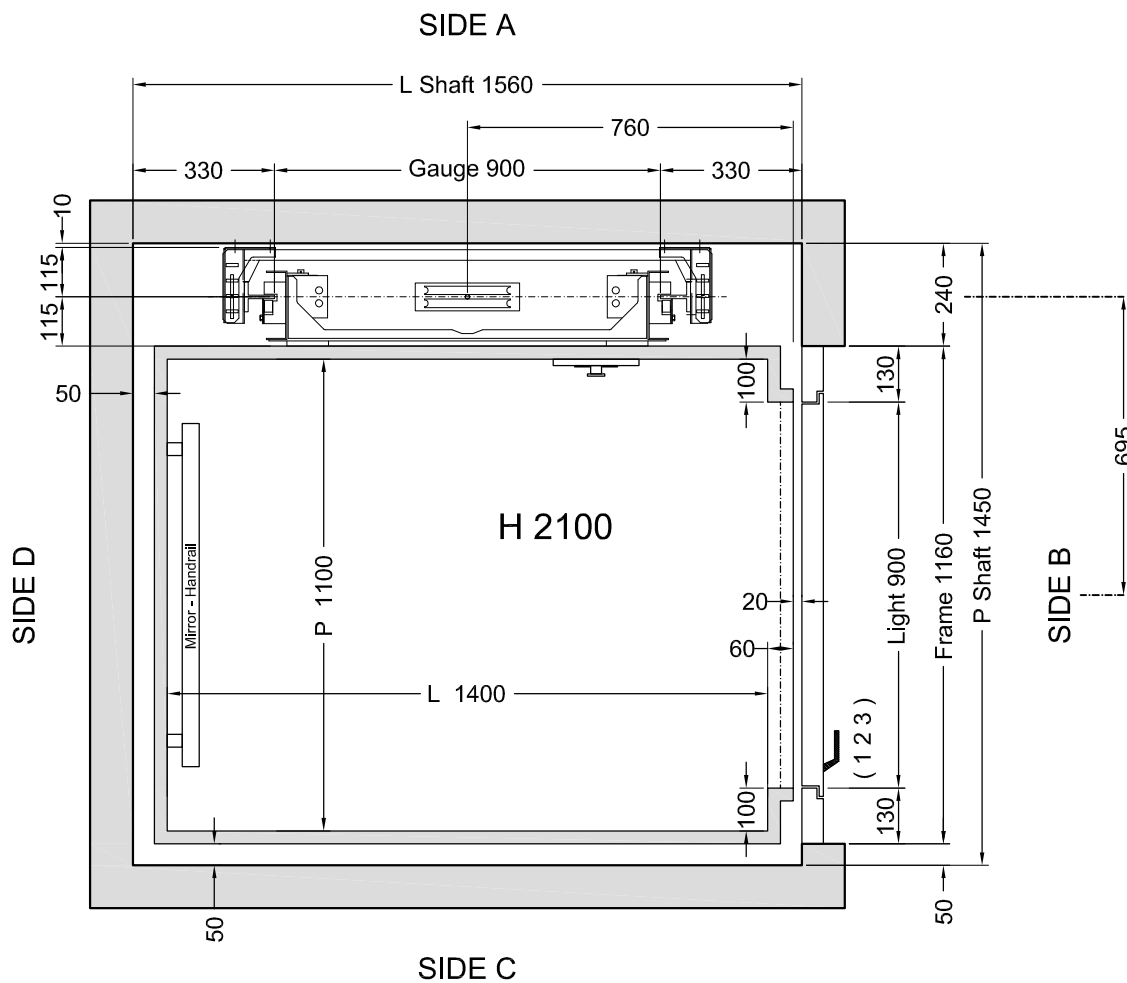

Pavimento a carico Cliente: Dim. **1430 (L) x 1100 (P)** Spes. **15 mm** Peso: **50 Kg**  
(EN)


**Stops: 3 - Doors: 3**

Shaft on **MASONRY (MURATURA)**

	Description	Designer	Date	<b>Disegno Definitivo</b>
VERSIONS				SHEET 1/2
				SHEET DIMENS. <b>A3</b>
	Corsa da 7 a 5,34 m; L. Vano; Locale macchine Lato D.	L.Del Bianco	26/11/2009	SCALE 1:12.5
		Disegno Definitivo L.Del Bianco	1° STESURA 26/11/09	CAPACITY 
		CAPACITY <b>350 Kg</b>	AREA m <sup>2</sup> <b>1,54</b>	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato
- Doppia velocità
- Manovra Automatica
- Interruttore blocco porta quadro
- Arcata rinforzata
- Fotocellula tutta parete

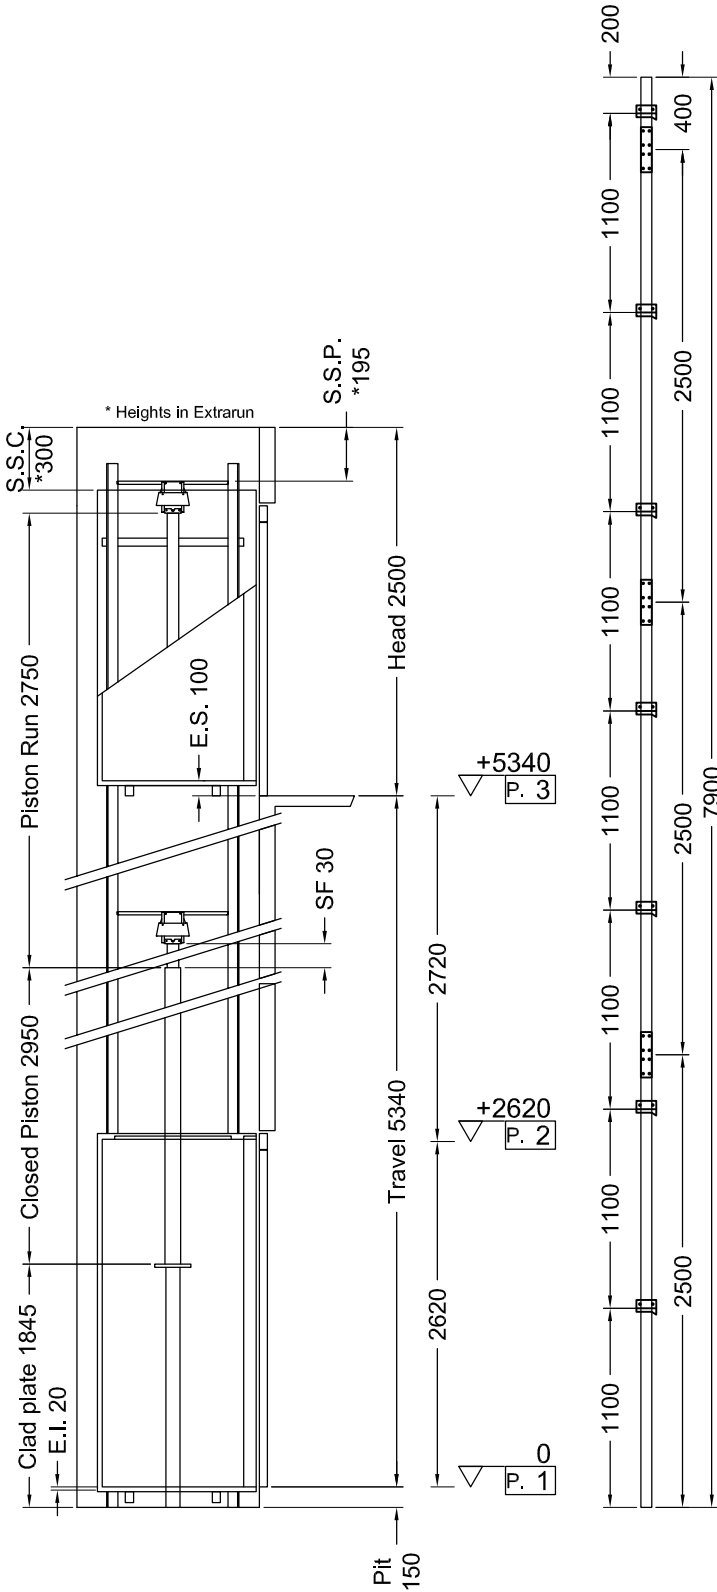

Indirect Installation	Speed 0,3 m/s	26/11/09 11.35	(V.020)
-----------------------	---------------	----------------	---------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12003	P	(N)	560
N	(N)	710	N	(N)	8152
F1	(N)	1787	F1	(N)	2979
F2	(N)	434	F2	(N)	723

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	38,59
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,74
SF.	Piston extraction (mm)	30	Overpressure limit (bar)	54,02
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,45
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	MORIS CM3A	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3,3	Cables lenght (mm) 2 x	10400
Piston	MORIS 9130 (ø) 70x5x2750	Min actual breaking load (N)	42100
Opt. oil position	basso		
Tubing	MORIS		
Tubing lenght (mm)	6000		
Min hydraulic oil (L)	70,5		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	MORIS	0825/P	IMQ I0222
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Away from shaft (mm)	2000
Cables enter in shaft: Side	D		

CABIN		CABIN ACCESSORIES	
Panels	Abete DL10	Handrail	INOX S.B.,Lati D
Finishes	Inox Scotch Brife	Mirror	Lati D
Oper. panel	A COLONNA		
Floor	a carico Cliente		
Roof	UNIVERSAL-Bianco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat
Double speed
Automatic control
General switcher to enabling controller
Reinforced arcade
Full height infra-red curtain

LE INFORMAZIONI CONTENUTE NEL PRESENTE DISEGNO SONO INTEGRATE DAL MANUALE OPERE MURARIE.



CLIENT <b>LIFT SHOP</b>	Disegno Definitivo	1° STESURA
	L. Del Bianco	26/11/09
PLACE OF INSTALLATION	Disegno Definitivo	
	SCALE OUT OF SCALE	SHEET 2/2