


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		B G 2	Galvanized and RAL 9003	2000	2100	Galvanized and RAL 9003	Panoramic	<u>Satinato</u>	C2
		1	Galvanized and RAL 9003	2000	2100	Galvanized and RAL 9003	Panoramic	<u>Satinato</u>	C2


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

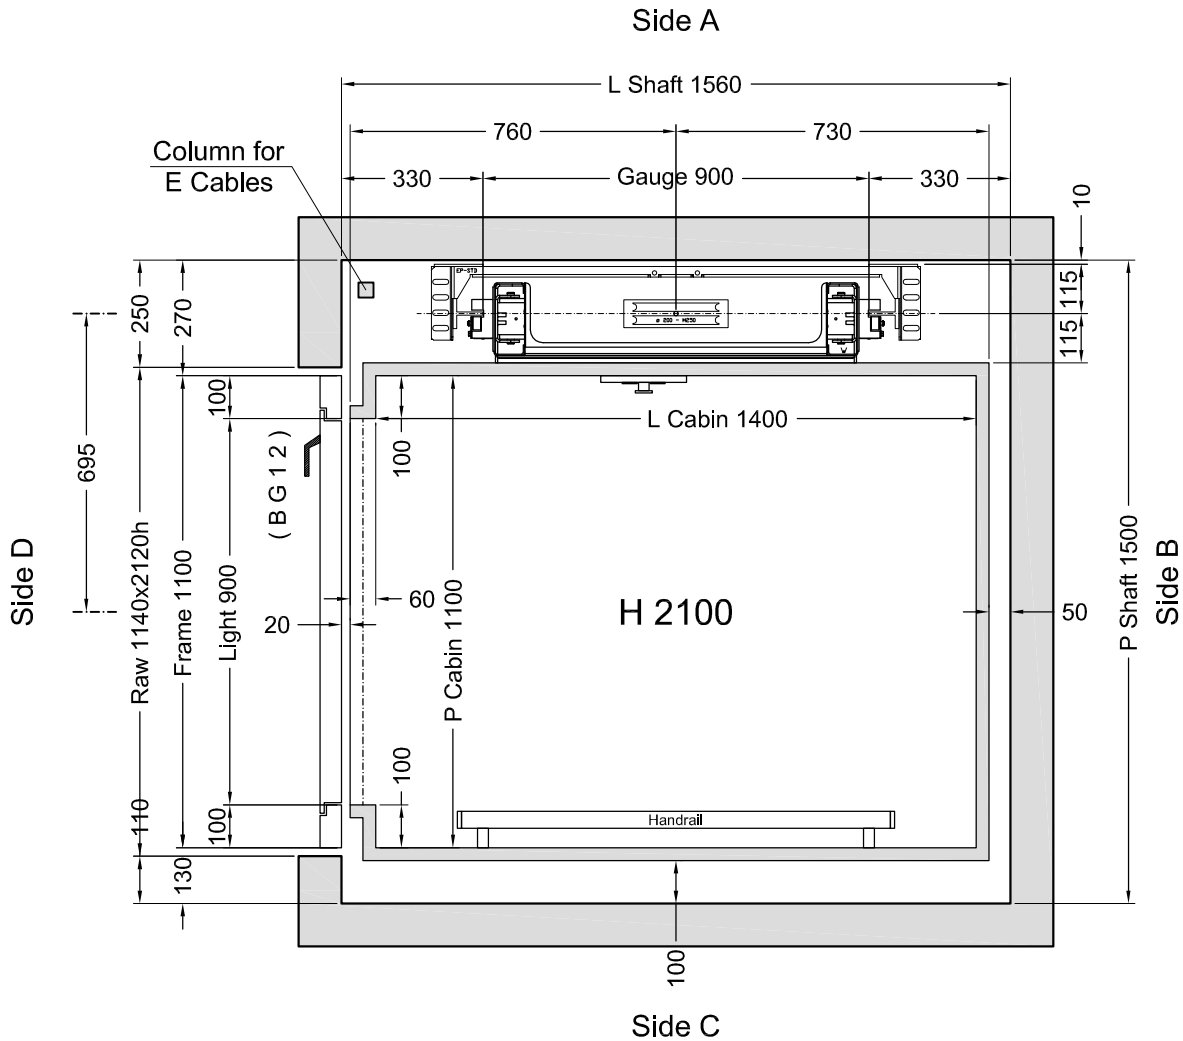

Stops: 4 - Doors: 4


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **20 mm** Weight: **40 kg**

		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/2
		L. Del Bianco	02/07/2014		SHEET DIMENS.
		L. Del Bianco	09/09/2013		A3
		Final Drawings D.Ogliastro	1° STESURA 03/07/14		SCALE 1:12.5
		CAPACITY	AREA m ²	CAPACITY	
		300 kg	1,54		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano G con tempo regolabile
- Dispositivo falsa testata
- Maniglie porte escluse dalla fornitura (porte senza fori maniglie)
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra automatica 2011

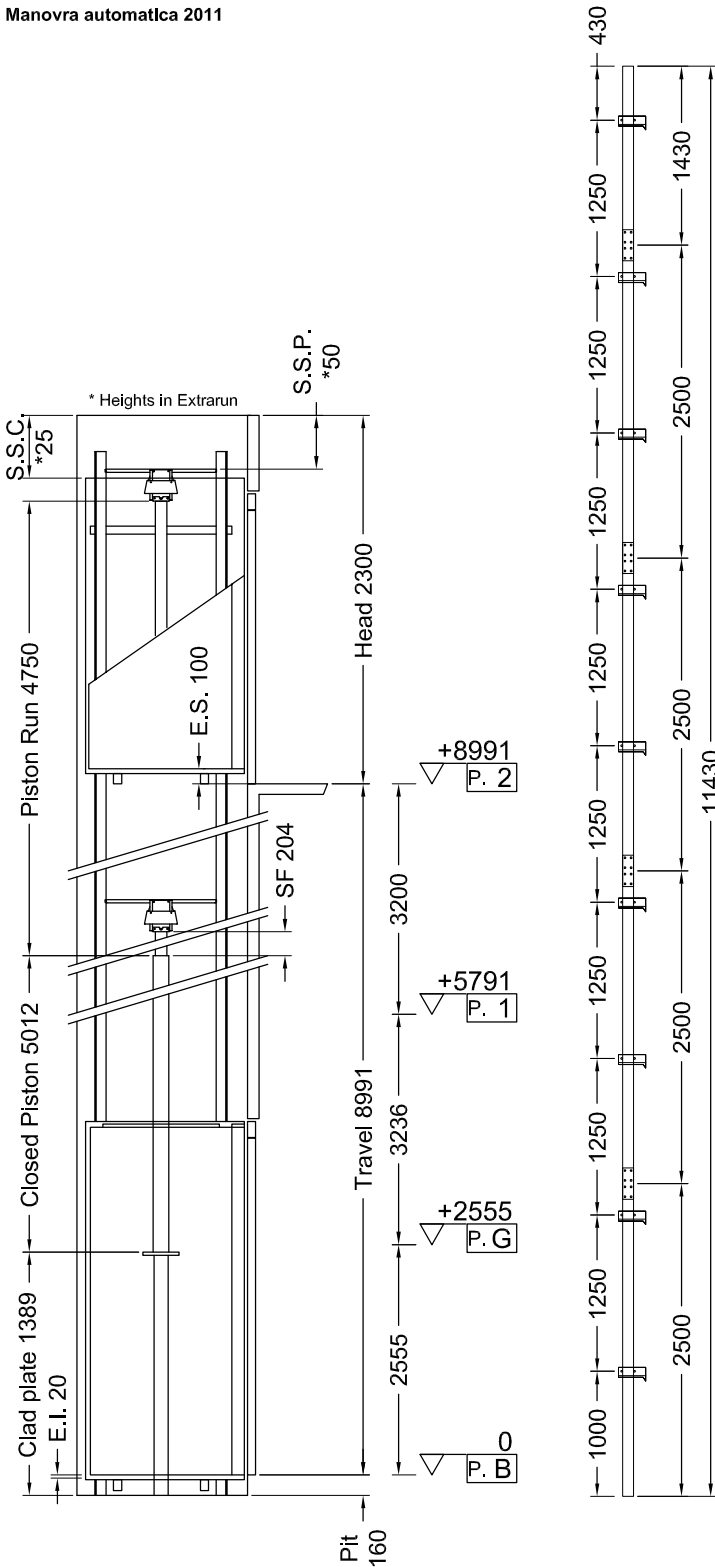

Indirect Installaton Speed **0,3 m/s** 04/07/14 11.50 (V.2845)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12443	P	(N)	717
N	(N)	1018	N	(N)	8596
F1	(N)	1667	F1	(N)	2779
F2	(N)	398	F2	(N)	664

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	37,33
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	22,03
SF.	Piston extraction (mm)	Overpressure limit (bar)	52,26
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,86
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 9
Motor (V)	MF230V	Cables	Ø 9 mm 8-(1+9+9)
Power (Kw)	2,9	Cables lenght (mm) 2 x	14000
Corrente (A)	19	Min actual breaking load (N)	51000
Piston	START Homø) 70x5x4750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	7000		
Min hydraulic oil (L)	54		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	B	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Galvanized sheet	Handrail	Inox Lucido, Side C
Finishes	Inox BA mecc.		
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	UNIVERSAL - led strips - Inox BA mecc.		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dlmension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Return to the G floor after adjustable time
 - False head device
 - Doors without handles (and without holes for handles)
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Automatic controll 2011