



Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1 2			Standard RAL 9003 *	2000	2100	RAL 9003 *	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad


(*) Smooth finish - No raised edges

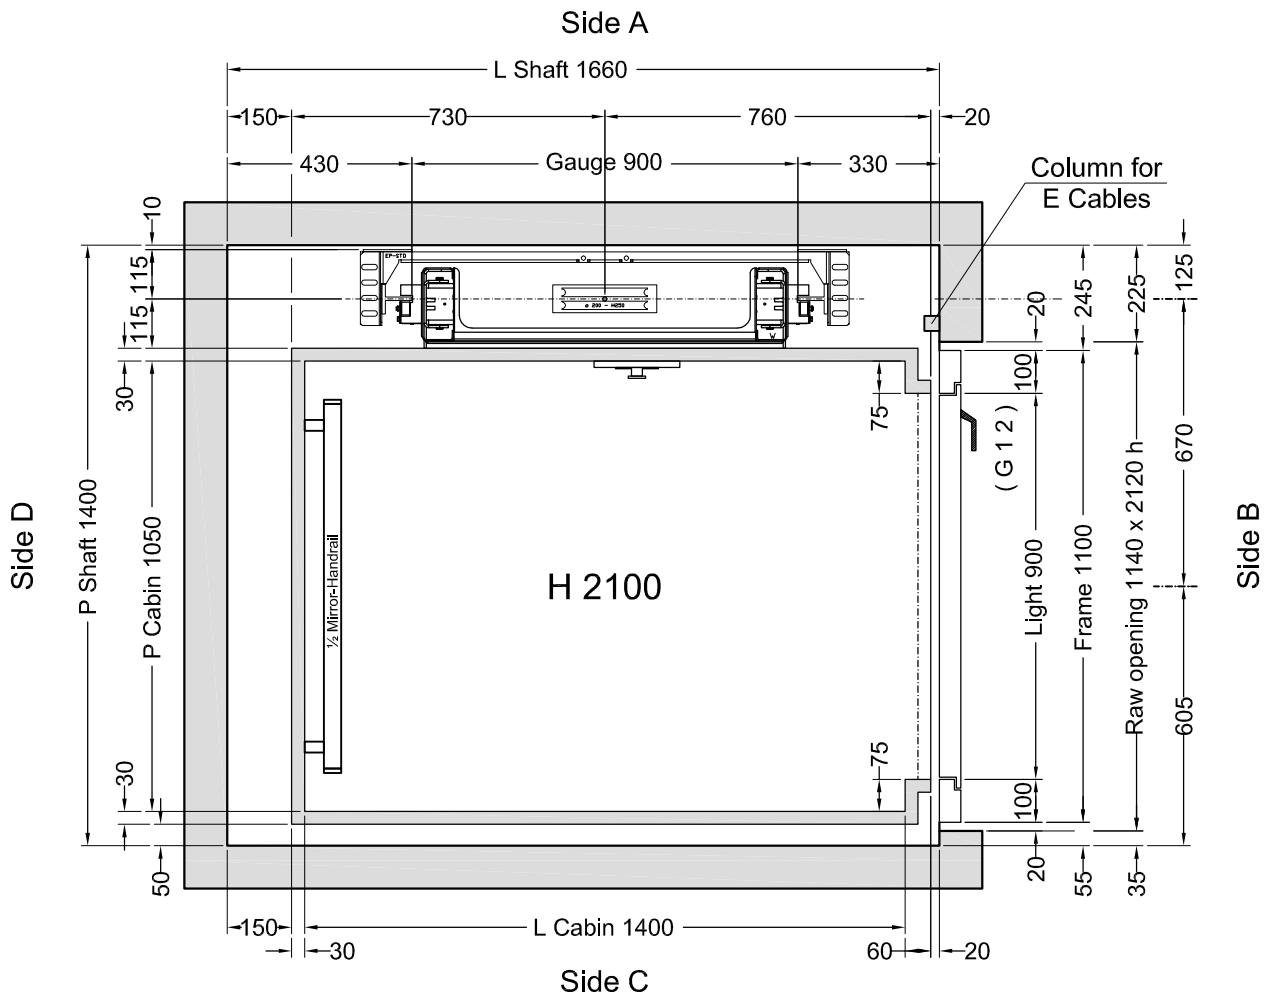

Stops: 3 - Doors: 3


Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1430 (L) x 1050 (P)** thks **20 mm** Weight: **50 kg**

		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/2
		L. Del Bianco	26/01/2015		SHEET DIMENS.
		L. Del Bianco	15/12/2014		A3
		Final Drawings L. Del Bianco	1° STESURA 06/02/15	SCALE	1:12.5
		CAPACITY	AREA m ²	CAPACITY	
		350 kg	1,47		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglie porte escluse dalla fornitura (porte senza fori maniglie)
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsanti Blu: G 1 2

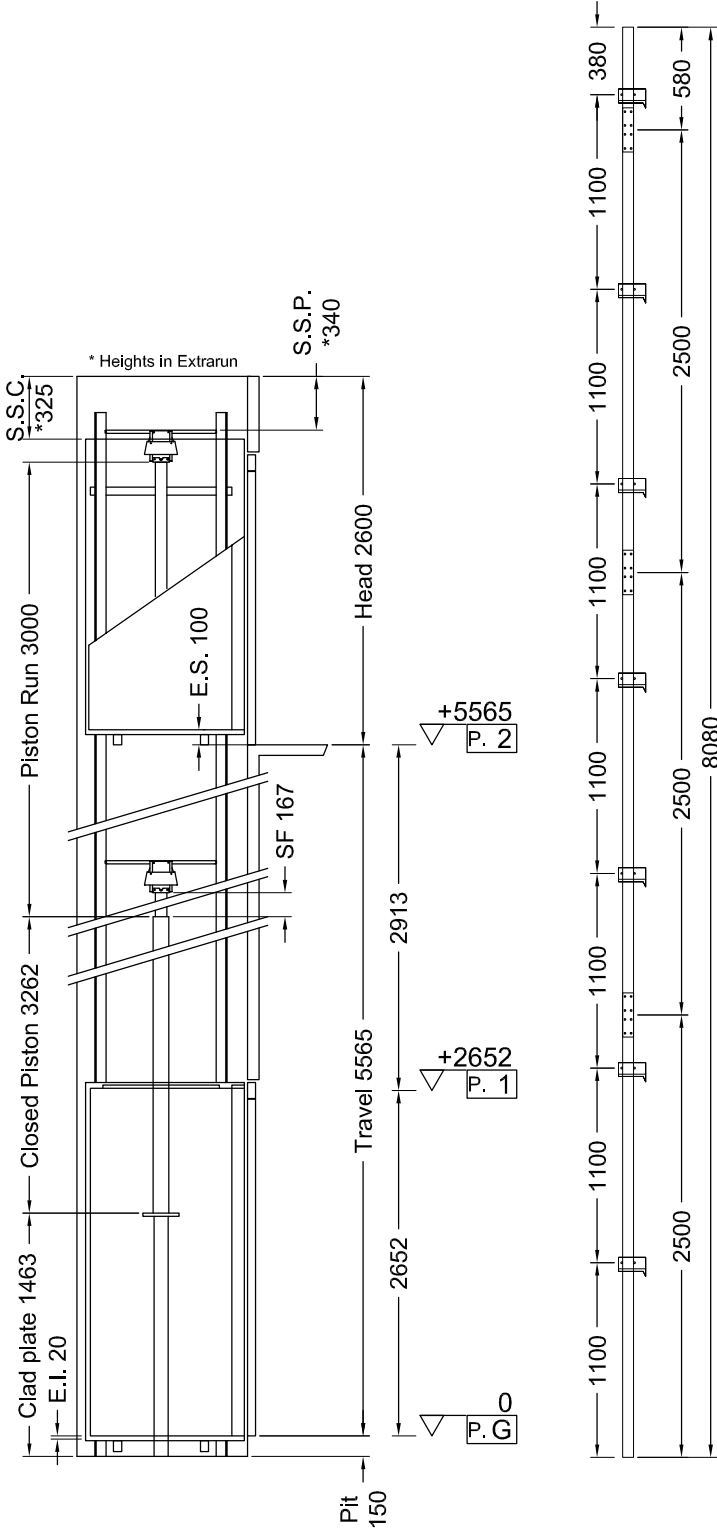

Indirect Installation	Speed 0,3 m/s	06/02/15 16.36 (V.2851)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12239	P	(N)	579
N	(N)	720	N	(N)	8301
F1	(N)	1600	F1	(N)	2667
F2	(N)	380	F2	(N)	633

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	40,27
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,42
SF.	Piston extraction (mm)	167	Overpressure limit (bar)	56,38
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,51
S.S.C.	Cabin/head (mm)	325		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Ropes	Ø 9 mm 8-(1+9+9)
Power (Kw)	3,4	Cables length (mm) 2 x	11000
Nominal current (A)	32	Min actual breaking load (N)	51000
Piston	Start Home (ø)70x5x3000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	8000		
Min hydraulic oil (L)	46		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	C		

CABIN		CABIN ACCESSORIES	
Panels	Arpa 517 Light Green Fin Erre	½ Mirror	Side D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side D
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	SPOTS LED - Blanco A32PP		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Doors without handles (and without holes for handles)
<u>Telephone by Lift Shop</u>
Full height Infra-red curtain V2
Automatic Control 2011
<u>Blue Buttons: G 1 2</u>
(Lift to stay where left: standard)



Final Drawings	L. Del Bianco	1° STESURA	06/02/15
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/2