


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G		1	2 Panels Similinox F12PPS	2000	2210	Similinox F12PPS	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

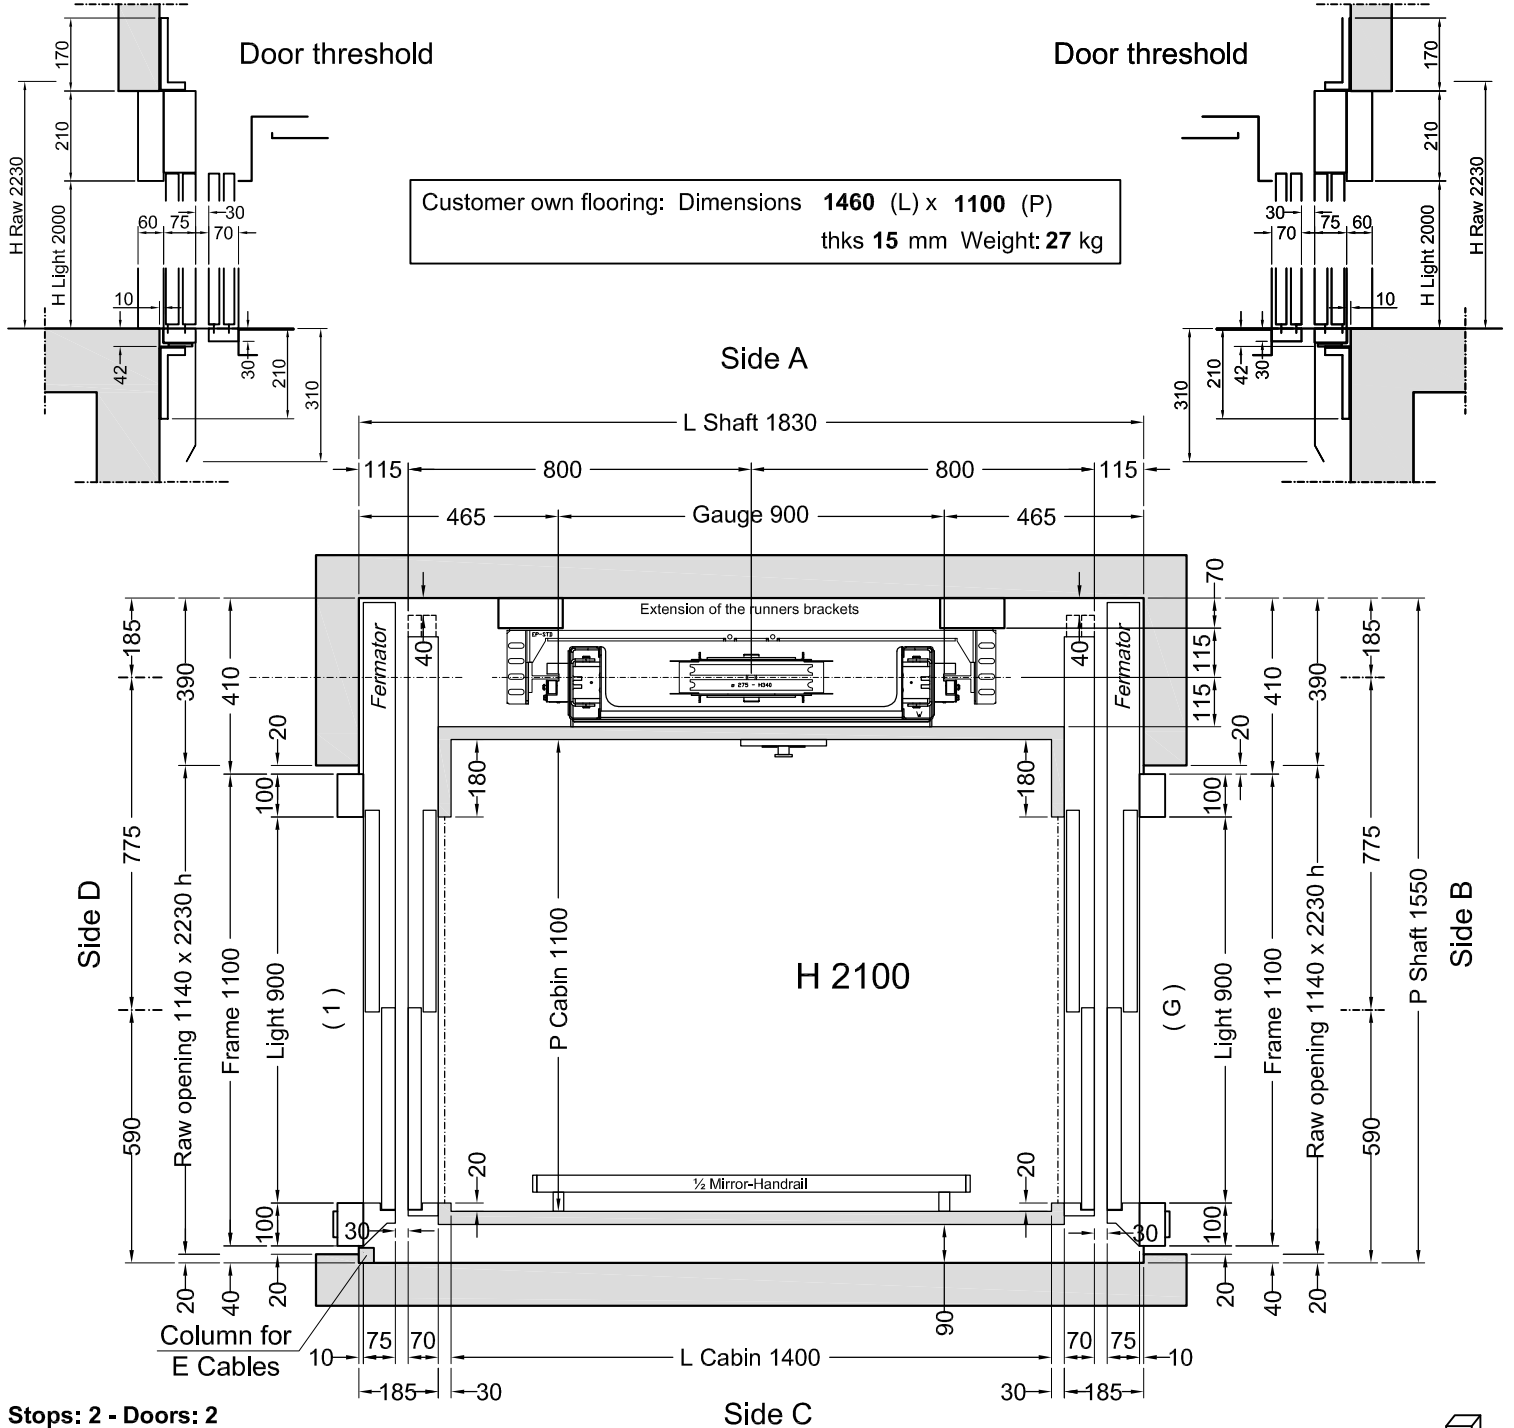

Stops: 2 - Doors: 2


Shaft in **Masonry (Muratura)**



			Designer	Date	Final Drawings	
			Colamarino	05/12/2013	Model ELFO 2	SHEET 1/2
			Final Drawings	1° STESURA		SHEET DIMENS. A3
			L. Del Bianco	13/12/13		SCALE 1:12.5
		CAPACITY	AREA m ²	CAPACITY		
		350 Kg	1,54			

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Pulsanti: G 1**
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsantiera cabina con pulsante apriporta**
- Ante Fermator**

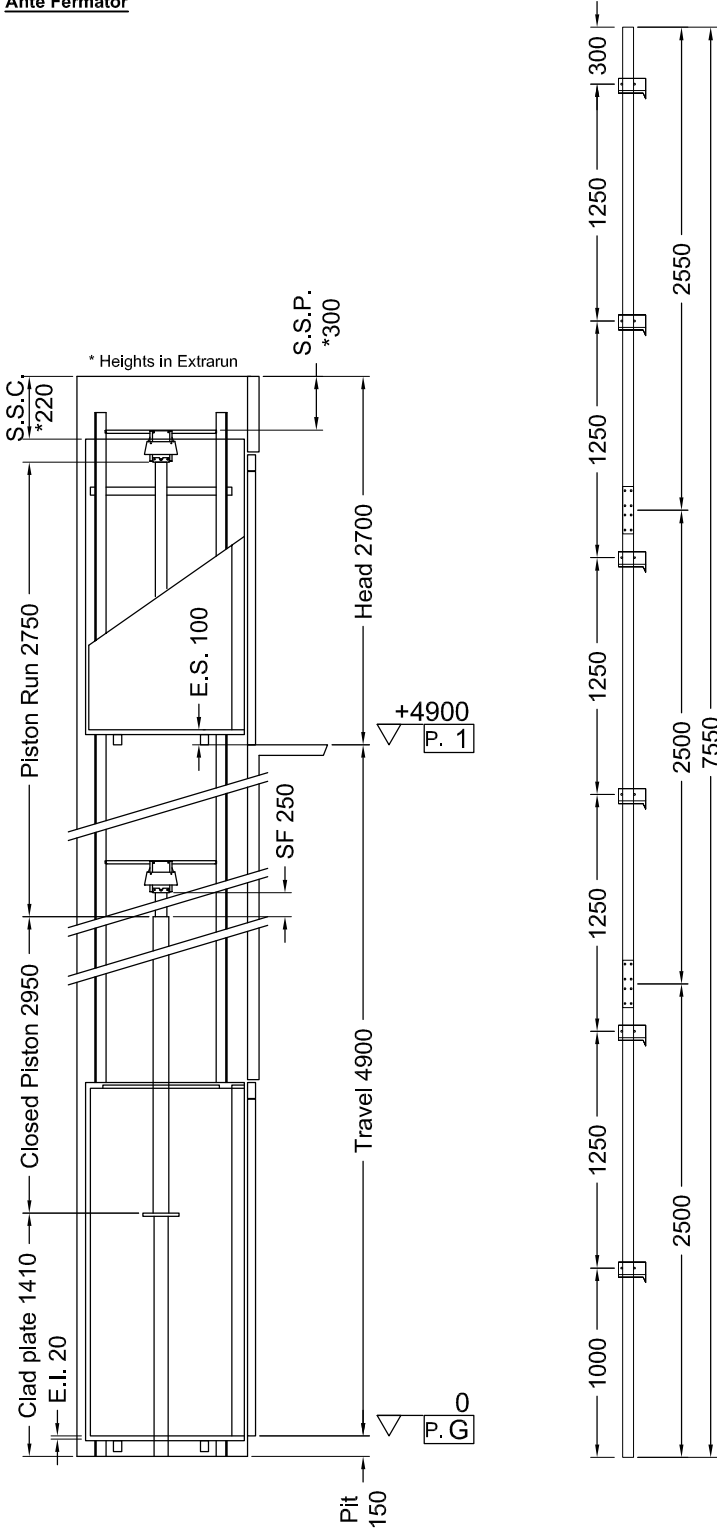

Indirect Installation	Speed 0,28 m/s	13/12/13 15.02 (V.2833)
-----------------------	----------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	14367	P	(N)	642
N	(N)	688	N	(N)	9624
F1	(N)	1818	F1	(N)	3030
F2	(N)	381	F2	(N)	635

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,71
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,04
SF.	Piston extraction (mm)	250	Overpressure limit (bar)	49,99
S.S.P.	Piston/head (mm)	300	Residual pressure (bar)	1,28
S.S.C.	Cabin/head (mm)	220		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	43	Brackets	(Nr) 6
Motor (V)	MF230V	Cables	Ø 11 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	10000
Corrente (A)	19	Min actual breaking load (N)	70700
Piston	START SL (ø) 80x5x2750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	49		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Lati C
Finishes	Inox Scotch Brite	Handrail	INOX S.B., Lati C
Oper. panel	VERTICAL		
Floor	By Customer		
Roof	SPOTS LED - Similinox F12PPS		
Cabin Doors			
	Side B: 2-Panels Automatic Sliding doors, Similinox F12PPS		
	Side D: 2-Panels Automatic Sliding doors, Similinox F12PPS		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Buttons: G 1
False head device
Telephone by Lift Shop
Full height infra-red curtain V2
Automatic Control 2011
Door Open Button on C.O.P.
Fermator Door Panels



The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

		Final Drawings L. Del Bianco	1° STESURA 13/12/13
		Final Drawings	
		SCALE OUT OF SCALE	SHEET 2/2