


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	1 2		Galvanized and Rust-proof *	2000	2100	Galvanized and Rust-proof*	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

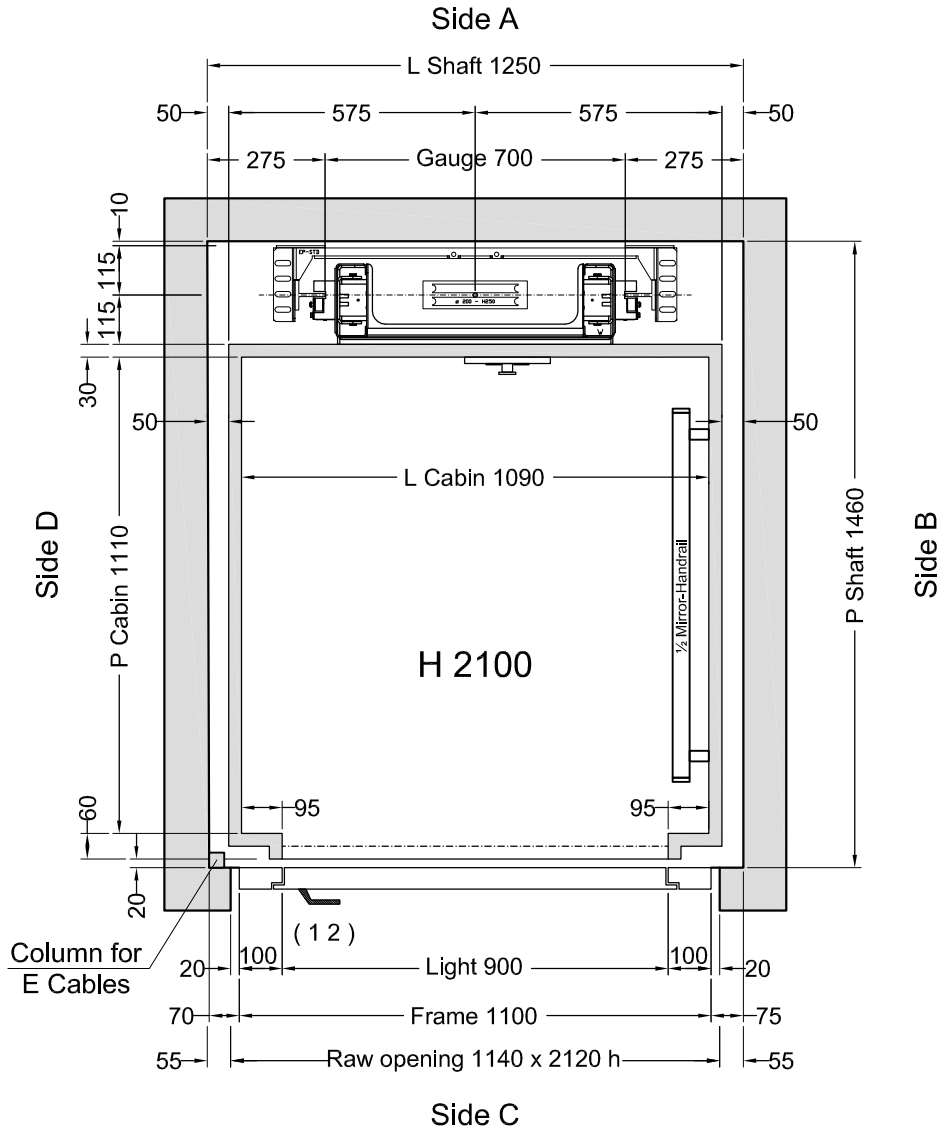

Stops: 2 - Doors: 2


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1090 (L) x 1140 (P)** thks **20 mm** Weight: **50 kg**

ORDER 90423 - Perth		Description	Designer	Date	Final Drawings	
ORDER NUMBER PS1627	VERSIONS				Model ELFO	SHEET 1/2
						SHEET DIMENS. A3
		Varie modifiche.	L. Del Bianco	28/08/2014		
	CLIENT Lift Shop	PLACE OF INSTALLATION 131 The Esplanade, Mt Pleasant, WA	Final Drawings L. Del Bianco	1° STESURA 22/09/14	CAPACITY	
					350 kg	1,21

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

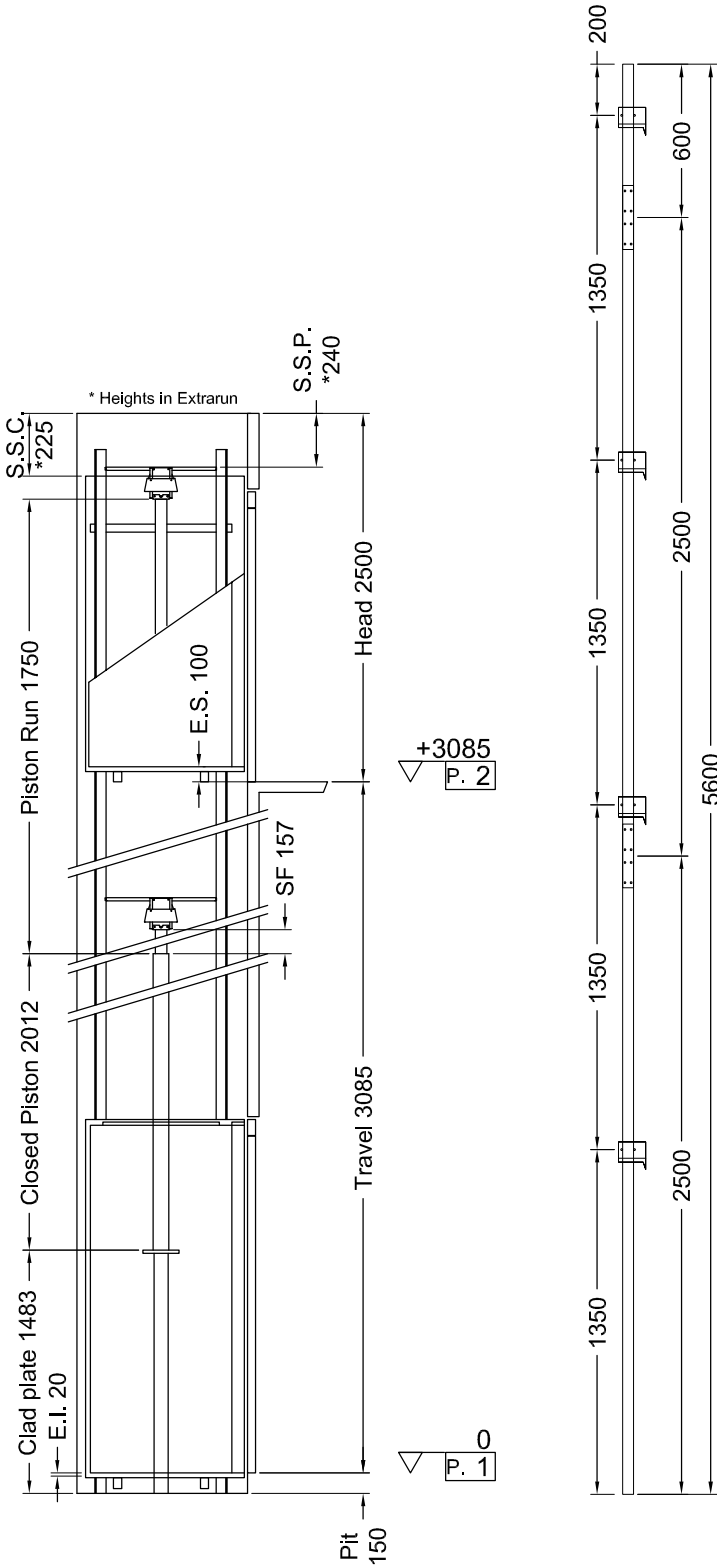

Indirect Installation	Speed 0,3 m/s	22/09/14 09.48 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11313	P	(N)	481
N	(N)	509	N	(N)	7570
F1	(N)	1595	F1	(N)	2658
F2	(N)	279	F2	(N)	466

SPACES		PRESSURES		
E.I.	Extrairun below cabin (mm)	20	Max static pressure (bar)	38,1
E.S.	Extrairun above cabin (mm)	100	Min static pressure (bar)	20,25
SF.	Piston extraction (mm)	157	Overpressure limit (bar)	53,34
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,25
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 4
Motor (V)	MF230V	Cables	Ø 9 mm 6-(1+9+9)
Power (Kw)	3.4	Cables length (mm) 2 x	9000
Nominal current (A)	19	Min actual breaking load (N)	47300
Piston	START Homø 70x5x1750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	14000		
Min hydraulic oil (L)	41		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	10000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Side B
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	SPOTS LED - Blanco A1		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - False head device
 - Handles CASPIM
 - Telephone by Lift Shop
 - Full height infra-red curtain V2
 - Automatic Control 2011