


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G		Standard RAL 9016	2000	2100	RAL 9016	Small	Etched Neutral	C2
1			Alluminium	2000	2100	Anodized aluminium	Panoramic	Etched Neutral	C2
2			Standard RAL 9016	2000	2100	RAL 9016	Large	Etched Neutral	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V66 ()

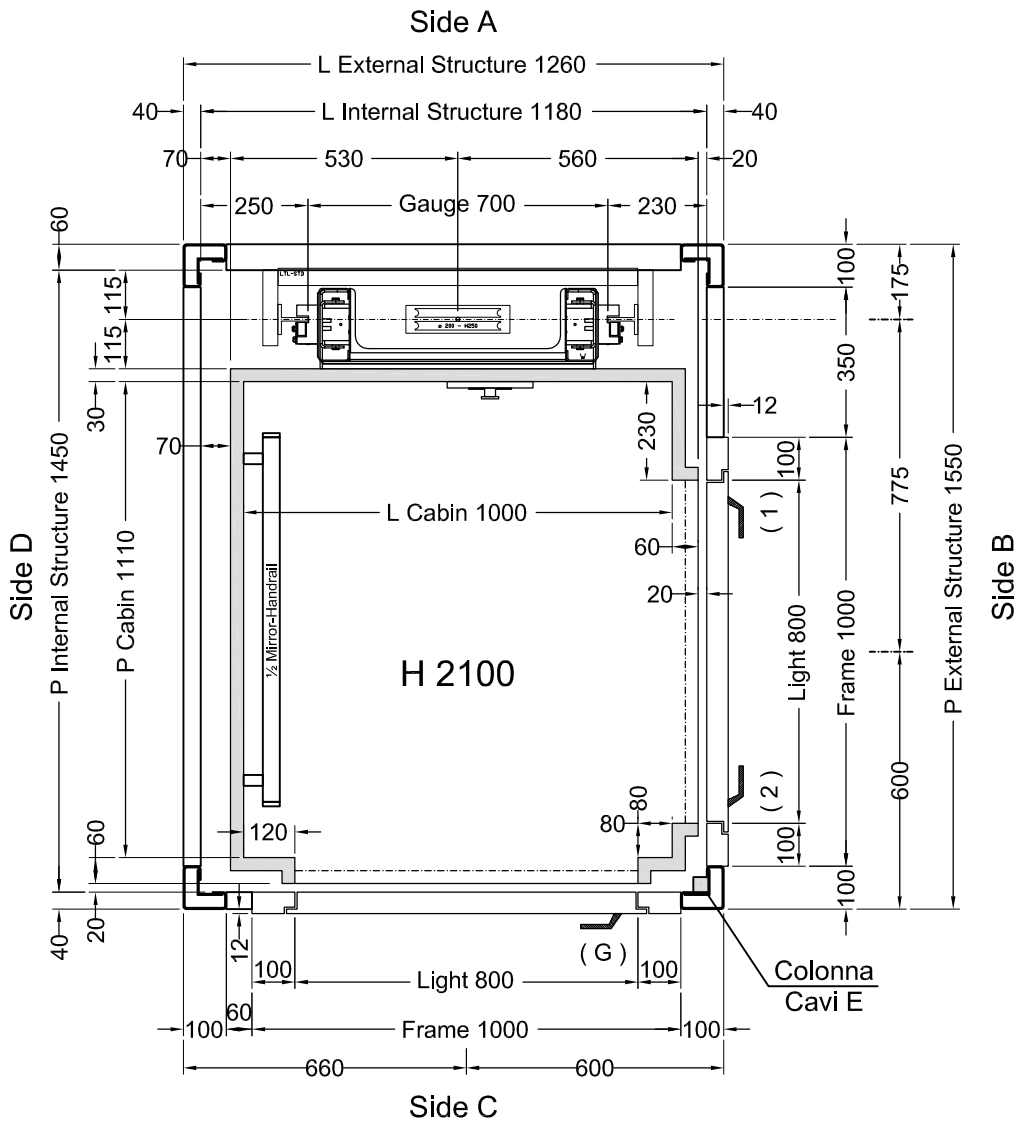

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	Galvanized	Glass	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Zincata	Vetro	Fondo Fossa	Per interno	




Stops: 3 - Doors: 3

Shaft in **Shaft V66 ()**

Snaps 0001

ORDER 93507-Sydney	DESCRIPTION	DESIGNER	DATE	Final Drawings	
				Model	SHEET
ORDER NUMBER PS2076	corsa da 6357 a 6227	D.Tomei	25/06/2015	ELFO	SHEET 1/4
	dim. Struttura e dim cabina corsa, opzioni ,colori	D.Ogliastro	16/06/2015		SHEET DIMENS. A3
		Final Drawings L. Del Bianco	1° STESURA 08/07/15		SCALE 1:12.5
		CAPACITY 300 kg	AREA m ² 1,11		CAPACITY

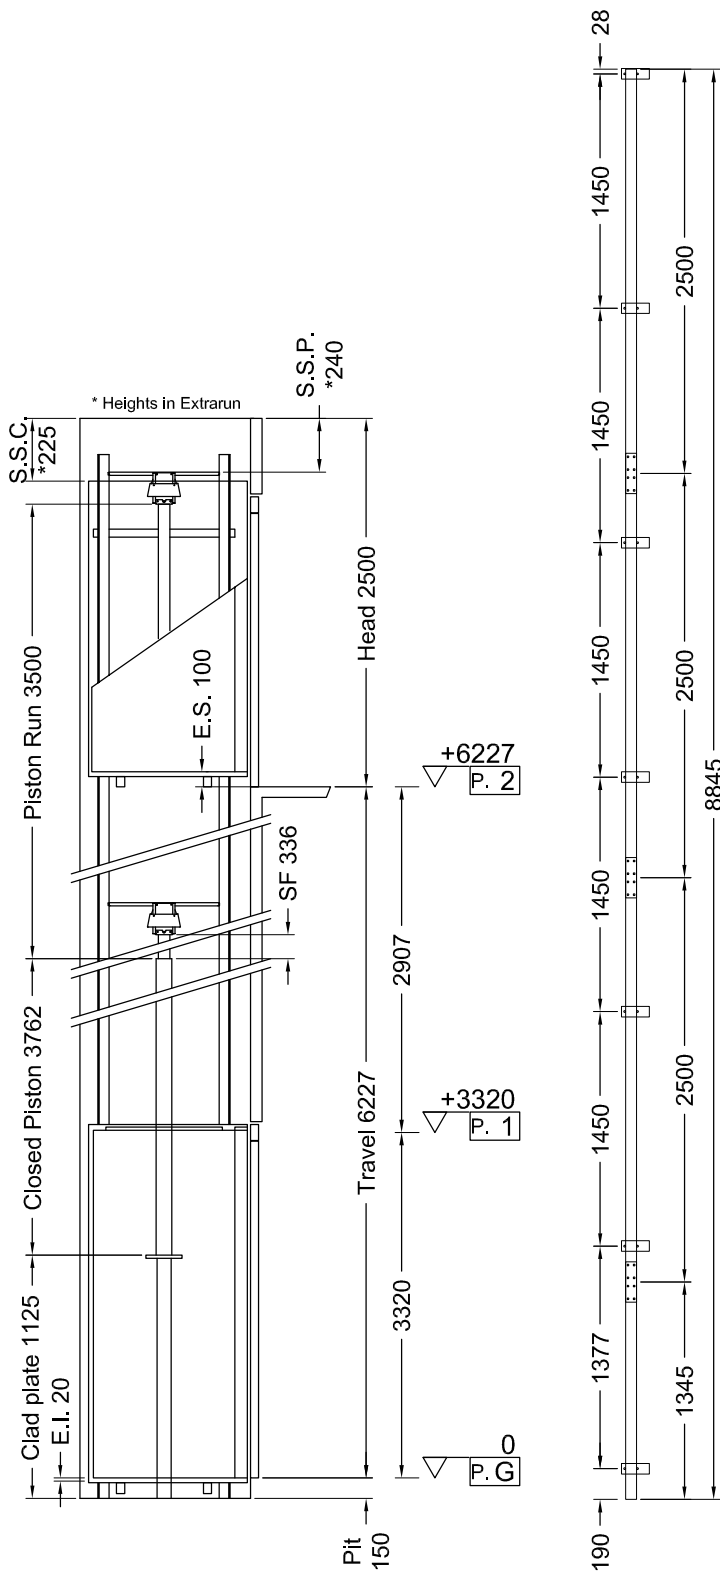

Indirect Installation Speed **0,3 m/s** 08/07/15 15.17 (V.2852) (G)

THRUST DURING NORMAL OPERATION				THRUST OF SAFETY DEVICE INTERVENT.			
P	(N)	9496		P	(N)	619	
N	(N)	833		N	(N)	6545	
F1	(N)	1297		F1	(N)	2162	
F2	(N)	227		F2	(N)	378	

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	31,6
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	16,3
SF.	Piston extraction (mm)	336	Overpressure limit (bar)	44,24
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,61
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Ropes	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	27	Min actual breaking load (N)	47300
Piston	Start Home (ø)70x5x3500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	5000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	F41PPS	½ Mirror	Side D
Finishes	Grigio PPS1	Handrail	Inox Lucido, Side D
Oper. panel	Vertical Flush mounted - Inox BA mecc.		
Floor	121-155 - SMOKED PEARL		
Ceiling	UNIVERSAL Led Strips - Blanco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the 1 floor after adjustable time
False head device
Handles CASPIM (Long)
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011
Cabin buttons: G 1 2
Blue buttons
Call Accept
Emergency manual descent from cabin



Final Drawings	1° STESURA
L. Del Bianco	08/07/15
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/4

Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	Galvanized	Glass	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Zincata	Vetro	Fondo Fossa	Per interno	

Anchorage in height of 3 frames in head and every 3.5 m max

