


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
23	1		Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

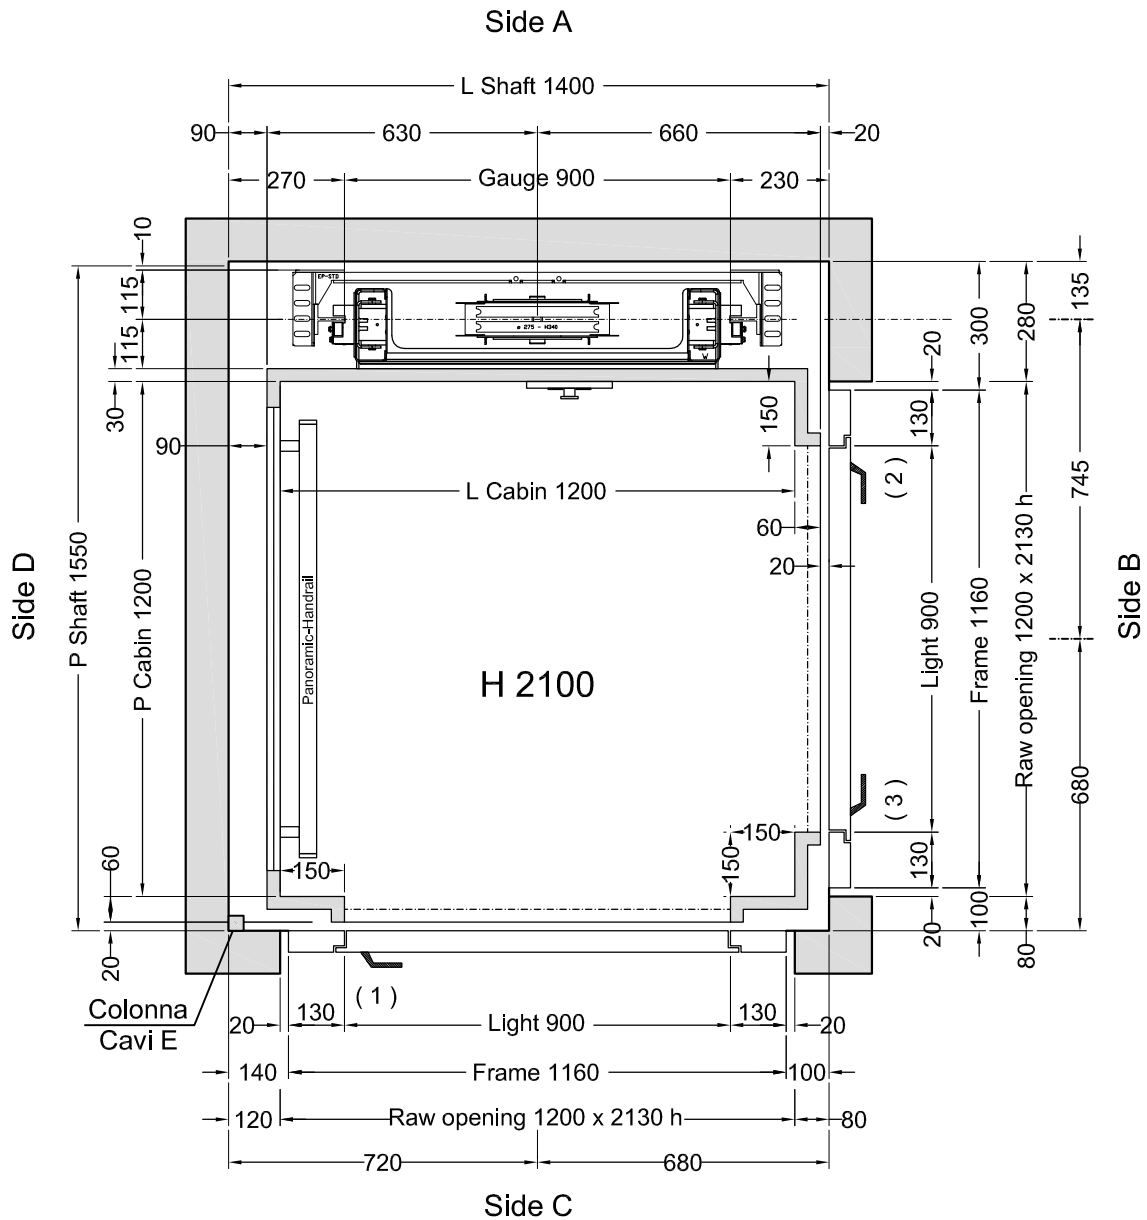


Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

		Designer	Date	Final Drawings	
		L. Del Bianco	09/04/2014		SHEET 1/2
		D. Ogliaastro	13/03/2014		SHEET DIMENS. A3
		Colamarino	06/03/2014		SCALE 1:12.5
		Final Drawings L. Del Bianco	1° STESURA 09/04/14		
		CAPACITY 350 kg	AREA m ² 1,44	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno al Piano 2 con tempo regolabile
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Carter Tetto cabina
- Manovra Automatica 2011

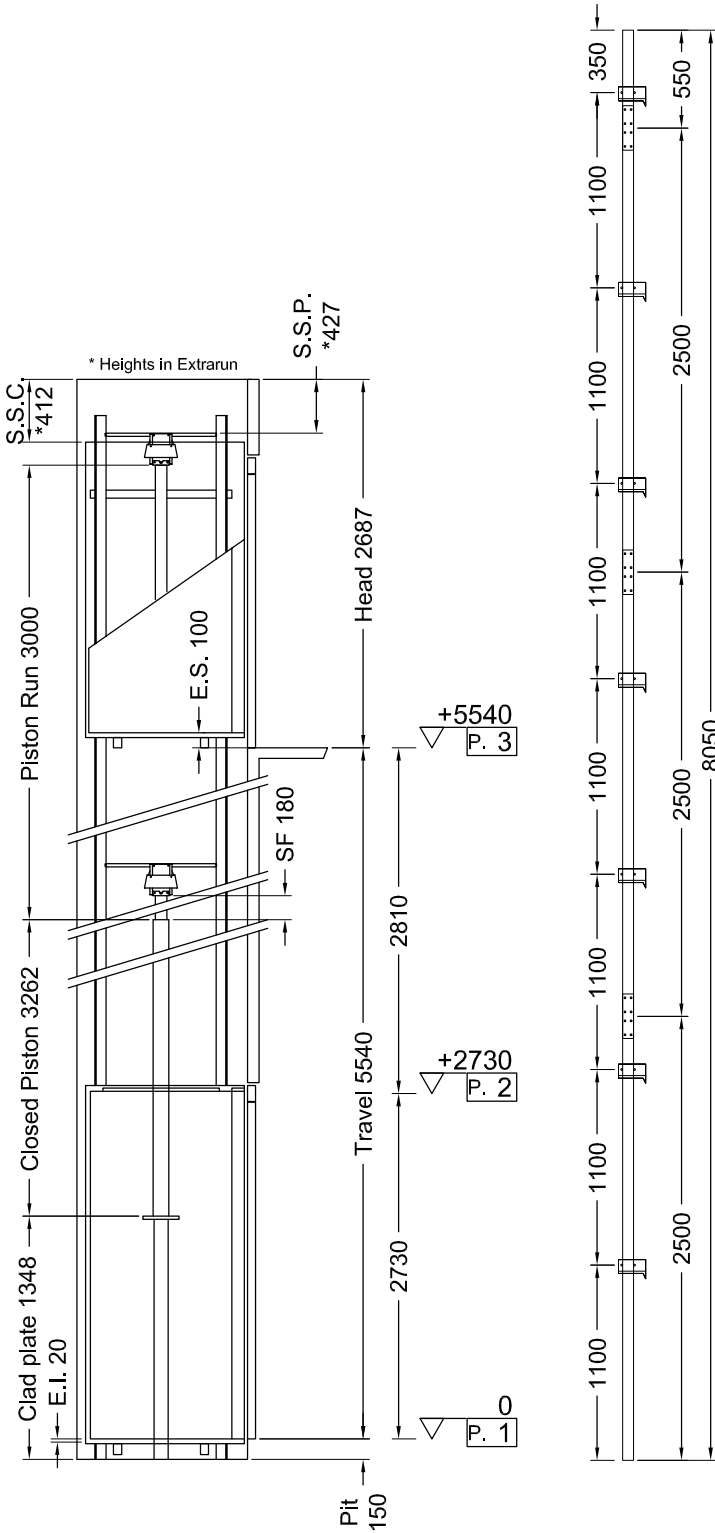

Indirect Installation		Speed 0,3 m/s	09/04/14 11.48 (V.2843)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 11152	P	(N) 628
N	(N) 744	N	(N) 7551
F1	(N) 1644	F1	(N) 2741
F2	(N) 322	F2	(N) 537
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 36,76
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 18,91
SF.	Piston extraction (mm) 180	Overpressure limit	(bar) 51,46
S.S.P.	Piston/head (mm) 427	Residual pressure	(bar) 1,63
S.S.C.	Cabin/head (mm) 412		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Cables	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	11000
Corrente (A)	19	Min actual breaking load (N)	47300
Piston	START Homø 70x5x3000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	14000		
Min hydraulic oil (L)	48		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110
MACHINERY LOCATION			
At floor	1	Length of the hose travel	10000 (mm)
Cables enter in shaft: Side	B		
CABIN	CABIN ACCESSORIES		
Panels	Inox Striper blu	Panoramic	Side D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side D
Oper. panel	VERTICAL (Like finishes)	Outside covering	Side D, Roof
Floor	TOUCH 2402	Outside finishing	SimlInox F12PPS
Ceiling	SPOTS LED - Inox Striper blu		
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Auto return to Level 2 after pre-set time delay			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Roof covering			
Automatic Control 2011			