


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1			Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

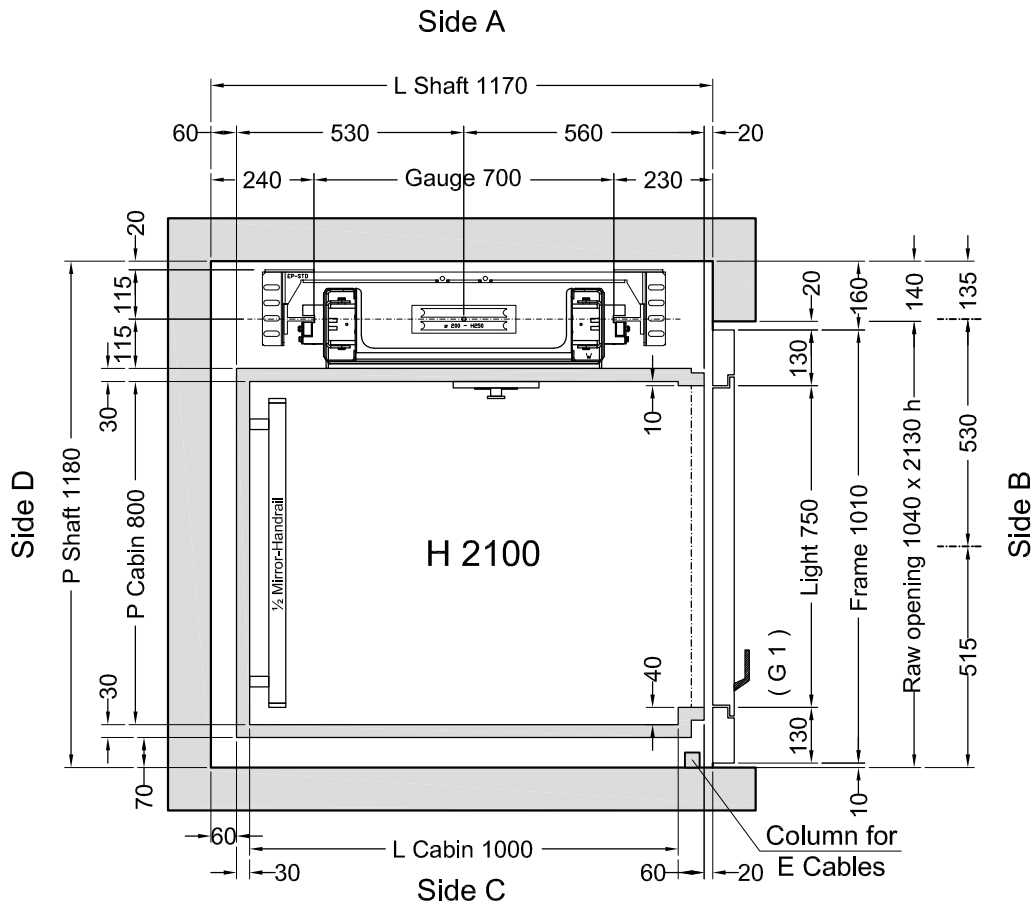

1
G

Stops: 2 - Doors: 2


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1030 (L) x 800 (P)** thks **5 mm** Weight: **14 kg**

		Designer	Date	Final Drawings	
				Model ELFO	SHEET 1/2
		Colamarino	07/11/2013		SHEET DIMENS. A3
		Final Drawings L. Del Bianco	1° STESURA 14/11/13		SCALE 1:12.5
		CAPACITY 300 kg	AREA m ² 0,8	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

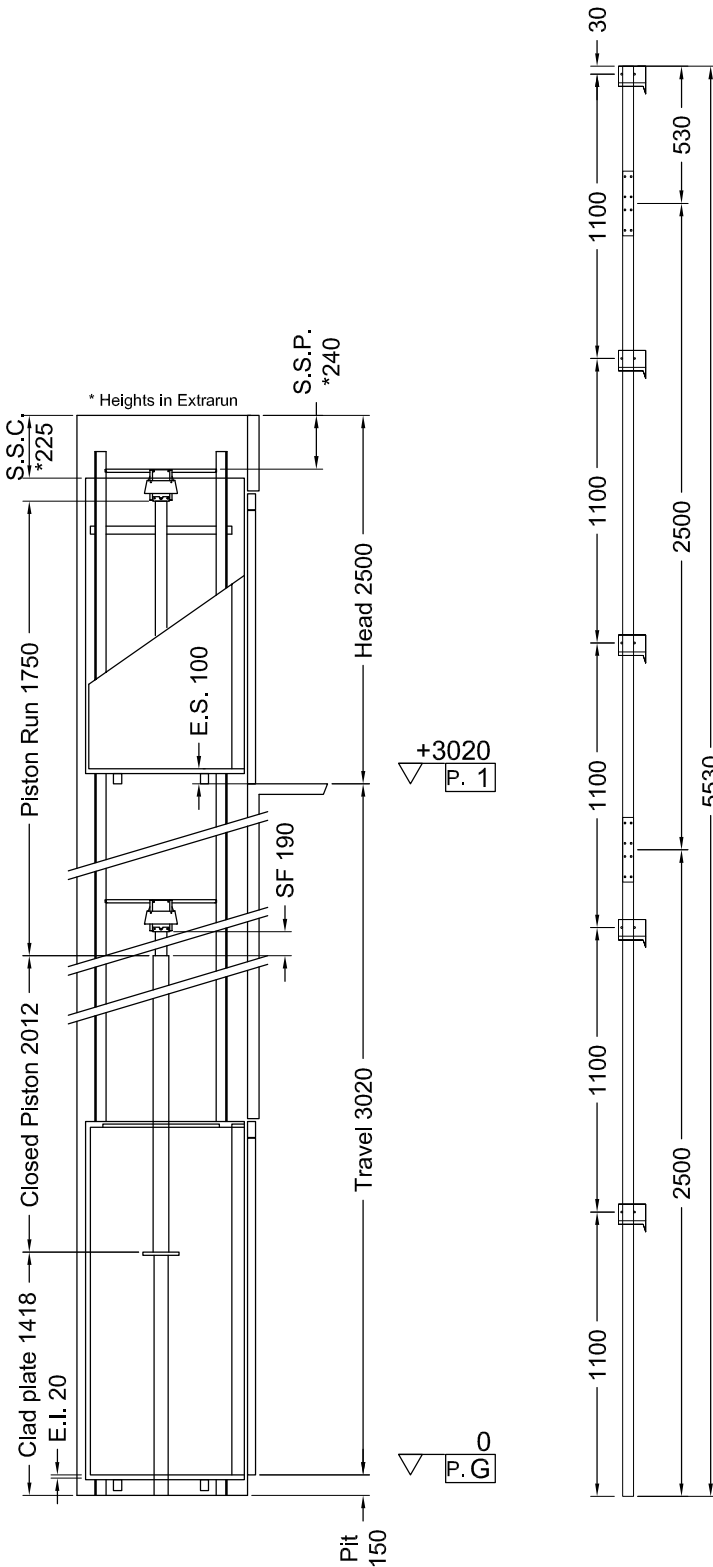

Indirect Installation	Speed 0,15 m/s	14/11/13 11.38 (V.2830)
-----------------------	----------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	9305	P	(N)	481
N	(N)	503	N	(N)	6225
F1	(N)	988	F1	(N)	1647
F2	(N)	227	F2	(N)	378

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	31,14
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	15,85
SF.	Piston extraction (mm)	190	Overpressure limit (bar)	43,6
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,25
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	BREVINI 30 LITRI (A-1*)	Runners	T70-2A
Capacity (l/min)	18	Brackets	(Nr) 5
Motor (V)	MF230V	Cables	Ø 9 mm 6-(1+9+9)
Power (Kw)	1,5	Cables length (mm) 2 x	9000
Corrente (A)	10,8	Min actual breaking load (N)	47300
Piston	START Homø 70x5x1750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - GOMITO 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	15		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT09	TUV DPD 004
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	G	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Bianco A1	½ Mirror	Side D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side D
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Roof	UNIVERSAL - Bianco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
False head device
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011



The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

		Final Drawings	1° STESURA
		L. Del Bianco	14/11/13
		Final Drawings	
SCALE	SHEET		
OUT OF SCALE	2/2		