


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G 1 2		Stnd+aluminium cover+RAL 9004*	2000	2100	Aluminium cover+RAL9004*	Panoramic	Fumè	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish + frames surroundig the glass RAL 9004

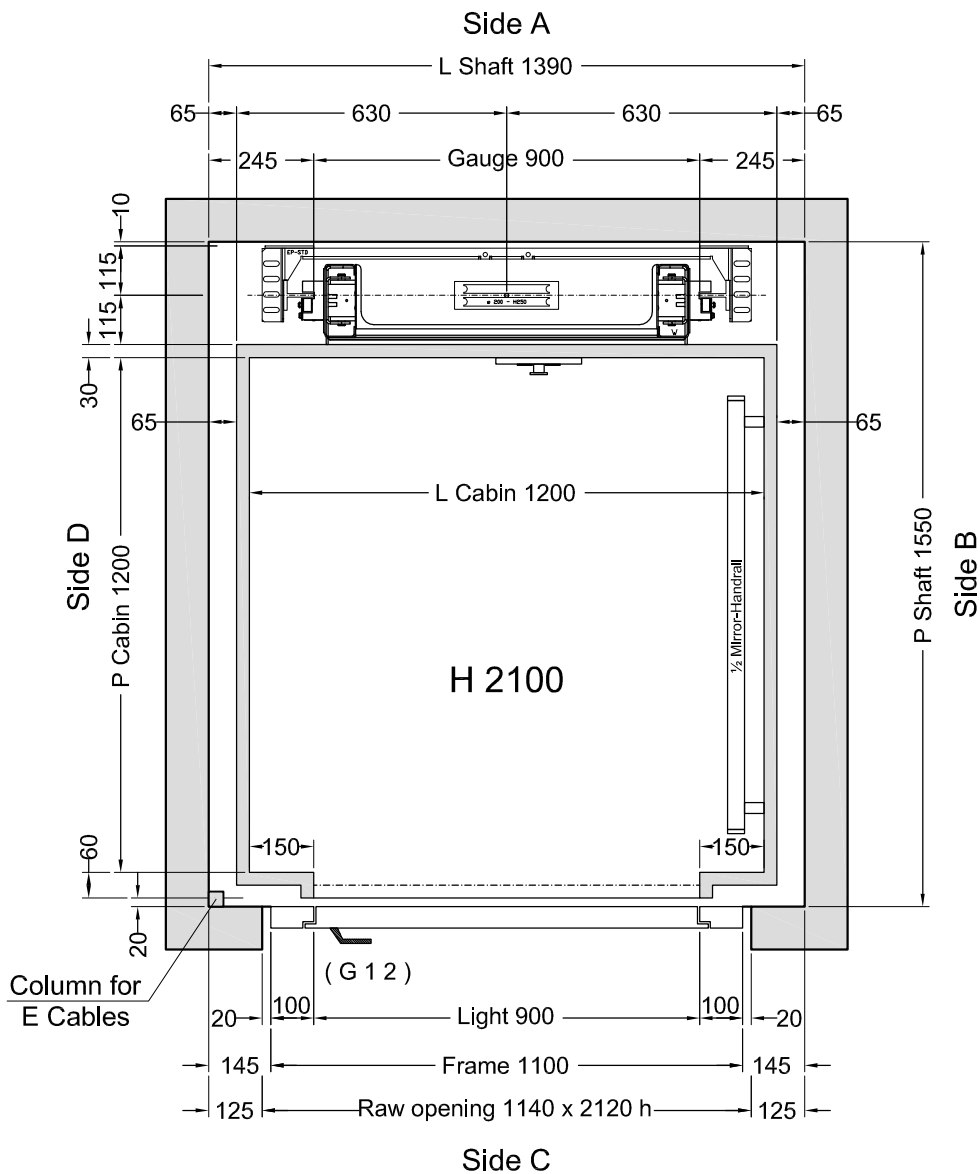


Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1200** (L) x **1230** (P) thks **20** mm Weight: ~~25~~ ⁵⁰ kg

			Designer	Date	Final Drawings	
					Model	SHEET
			L. Del Bianco	25/05/2015	D.Ogliastro	18/05/2015
			Final Drawings	1° STESURA	SCALE	SHEET DIMENS.
			L. Del Bianco	25/05/15	1:12.5	A3
			CAPACITY	AREA m ²	CAPACITY	
			300 kg	1,44		

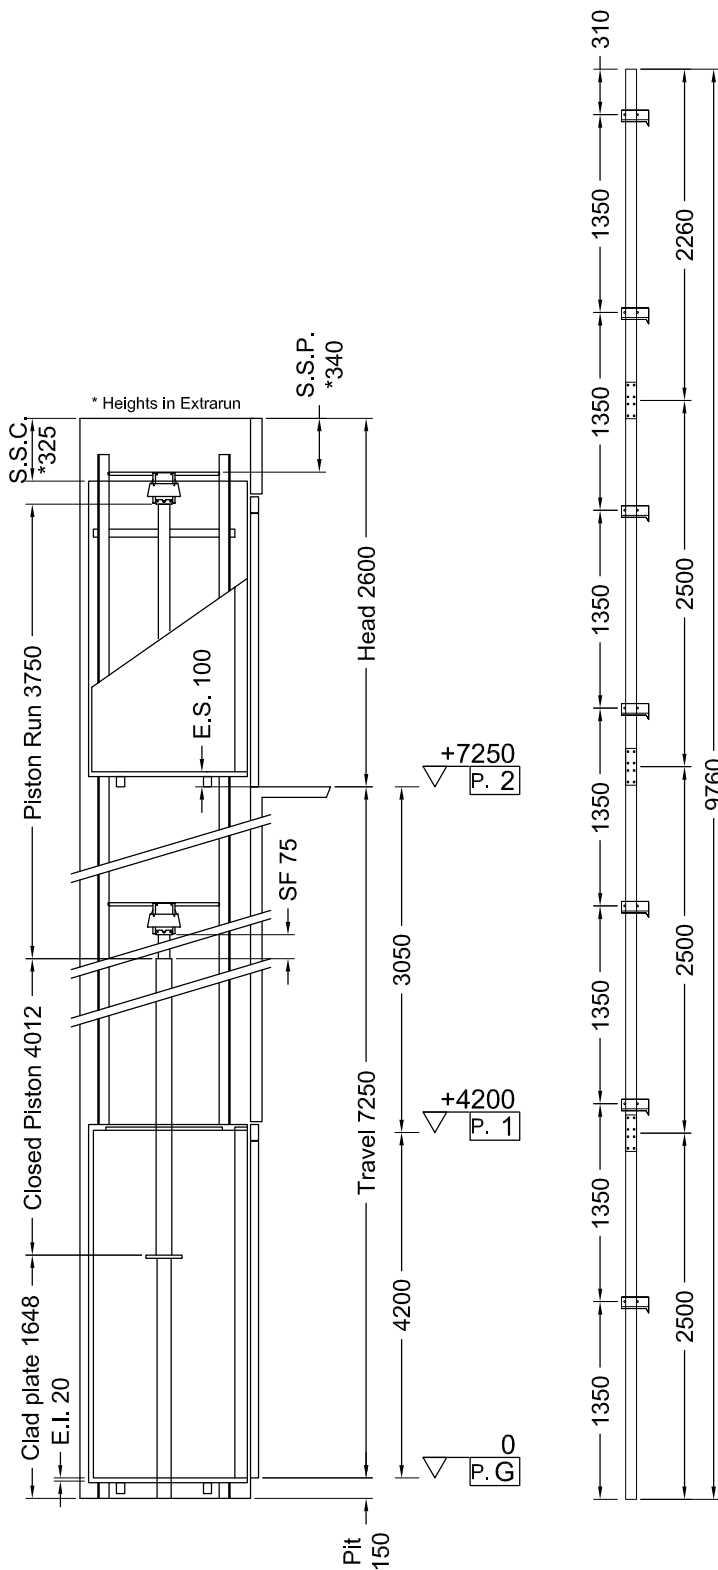

Indirect Installation Speed 0,3 m/s 25/05/15 17.23 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11867	P	(N)	638
N	(N)	950	N	(N)	8223
F1	(N)	1746	F1	(N)	2910
F2	(N)	315	F2	(N)	525

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	36,72
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	21,43
SF.	Piston extraction (mm)	75	Overpressure limit (bar)	51,41
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,66
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 7
Power (Kw)	2,9	Ropes	Ø 9 mm 6-(1+9+9)
Nominal current (A)	27	Cables length (mm) 2 x	13000
Piston	Start Home (Ø)70x5x3750	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	10000		
Min hydraulic oil (L)	50		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	4000 (mm)
Cables enter in shaft: Side	B		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Side B
Finishes	F41PPS	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)	Outside covering	Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	UNIVERSAL Led Strips - Blanco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
Handles CASPIM (Long)
Telephone by Lift Shop
Full height infra-red curtain V2
Roof covering
Automatic Control 2011
Call Accept

