



FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G 12		Standard Galvanized *	2000	2100	Galvanized *	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

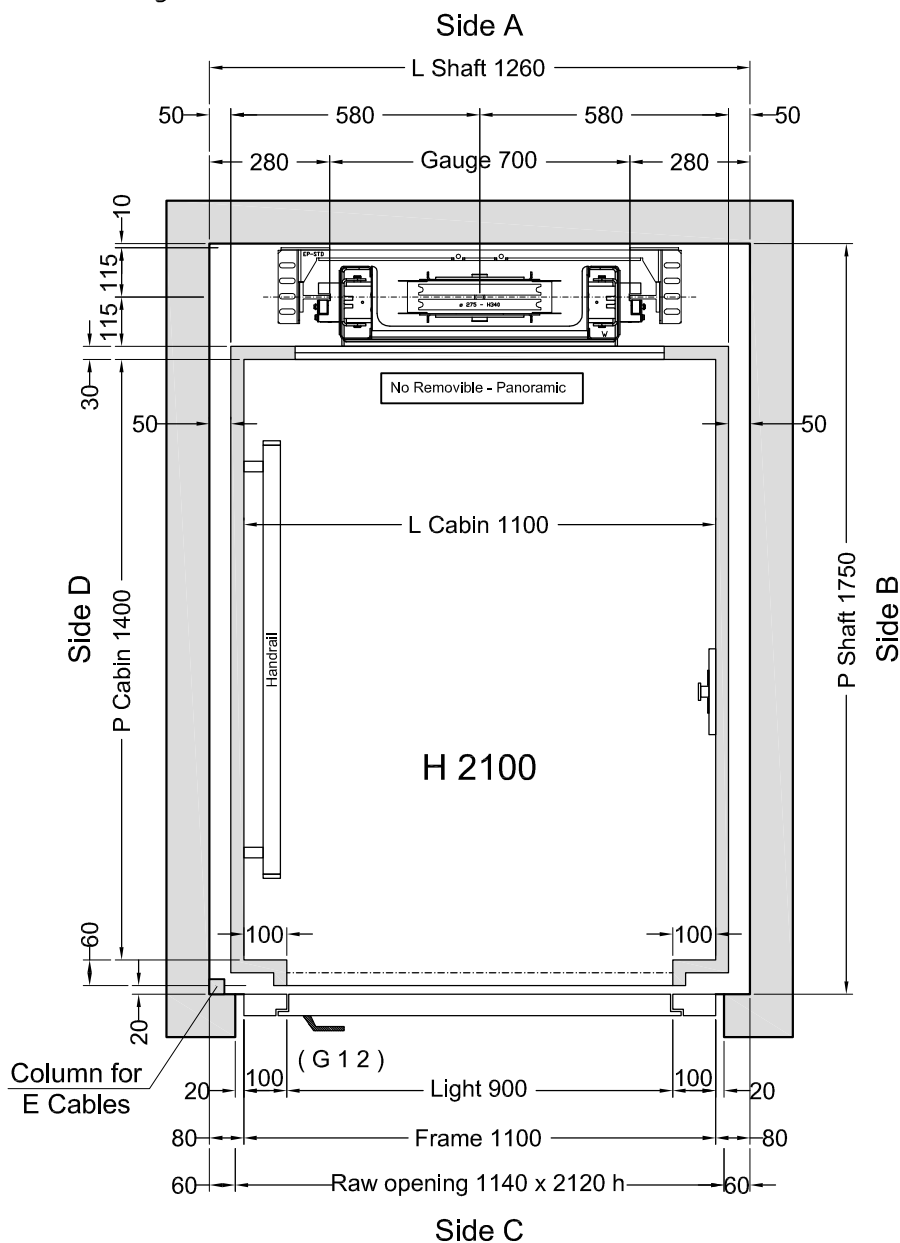


Feasibility n° 2390 - Panoramic Side A - Access keypad

Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1100 (L) x 1430 (P)** thks **20 mm** Weight: **27 kg**

		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/2
		D.Ogliastro	15/05/2015	SHEET DIMENS.	A3
		Final Drawings L. Del Bianco	1° STESURA 01/06/15	SCALE	1:12.5
		CAPACITY	AREA m²	CAPACITY	
		300 kg	1,54		

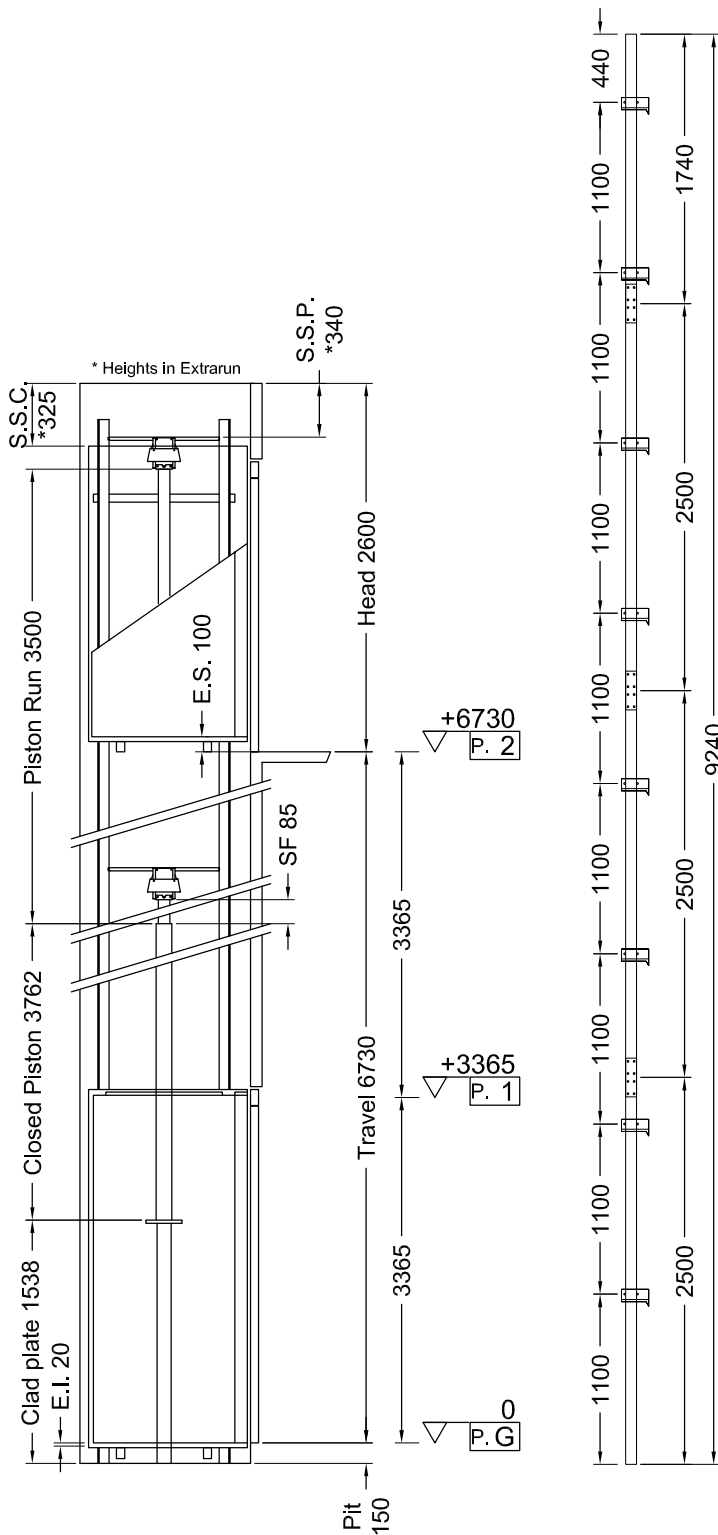

Indirect Installation Speed 0,3 m/s 01/06/15 09.38 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12476	P	(N)	668
N	(N)	900	N	(N)	8550
F1	(N)	2083	F1	(N)	3471
F2	(N)	310	F2	(N)	517

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	37,46
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,17
SF.	Piston extraction (mm)	85	Overpressure limit (bar)	52,44
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,73
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 8
Motor (V)	MF230V	Ropes	Ø 11 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	27	Min actual breaking load (N)	70700
Piston	Start Home (Ø)70x5x3500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	7000		
Min hydraulic oil (L)	48		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Panoramic	Side A (F. 2390)
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side D
Oper. panel	VERTICAL (Like finishes)	Outside covering	Roof
Floor	By Customer	Outside finishing	Similinox F12PPS
Ceiling	SPOTS LED - Inox BA mecc.		

OTHER ACCESSORIES
Mechanic painted RAL 9005
Guides dimension 2.5 m
Piston painted RAL 9005
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM (Long)
Telephone by Lift Shop
Full height infra-red curtain V2
Car Operating Panel Side B
Roof covering
Automatic Control 2011
Access keypad in cabin
Call Accept
Emergency descent from cabin
Cabin Buttons: G 1 2

