


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		B G 1	Not Supplied by EP	2000	2110		Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

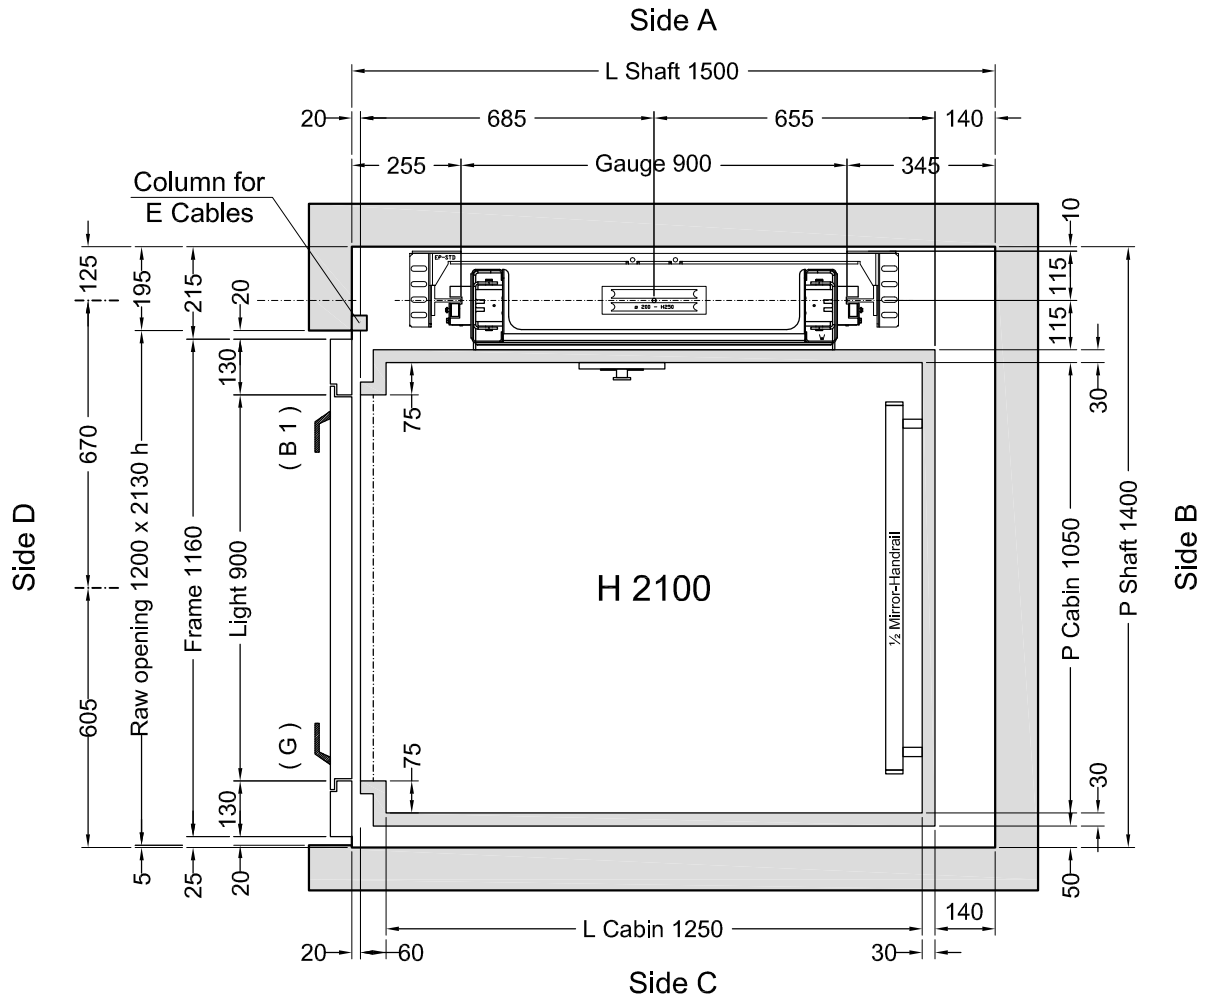


Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1280 (L) x 1050 (P)** thks **20 mm** Weight: **50 kg**

		Designer	Date	Final Drawings	
		L. Del Bianco	02/03/2015	Model	SHEET
		L. Del Bianco	30/09/2014	ELFO	1/2
		D. Ogiastro	24/09/2014		SHEET DIMENS.
		L. Del Bianco	17/04/2014		A3
		nal Drawings	1° STESURA		SCALE
		L. Del Bianco	02/03/15		1:12.5
		APACITY	AREA m ²	CAPACITY	
		350 kg	1,32		

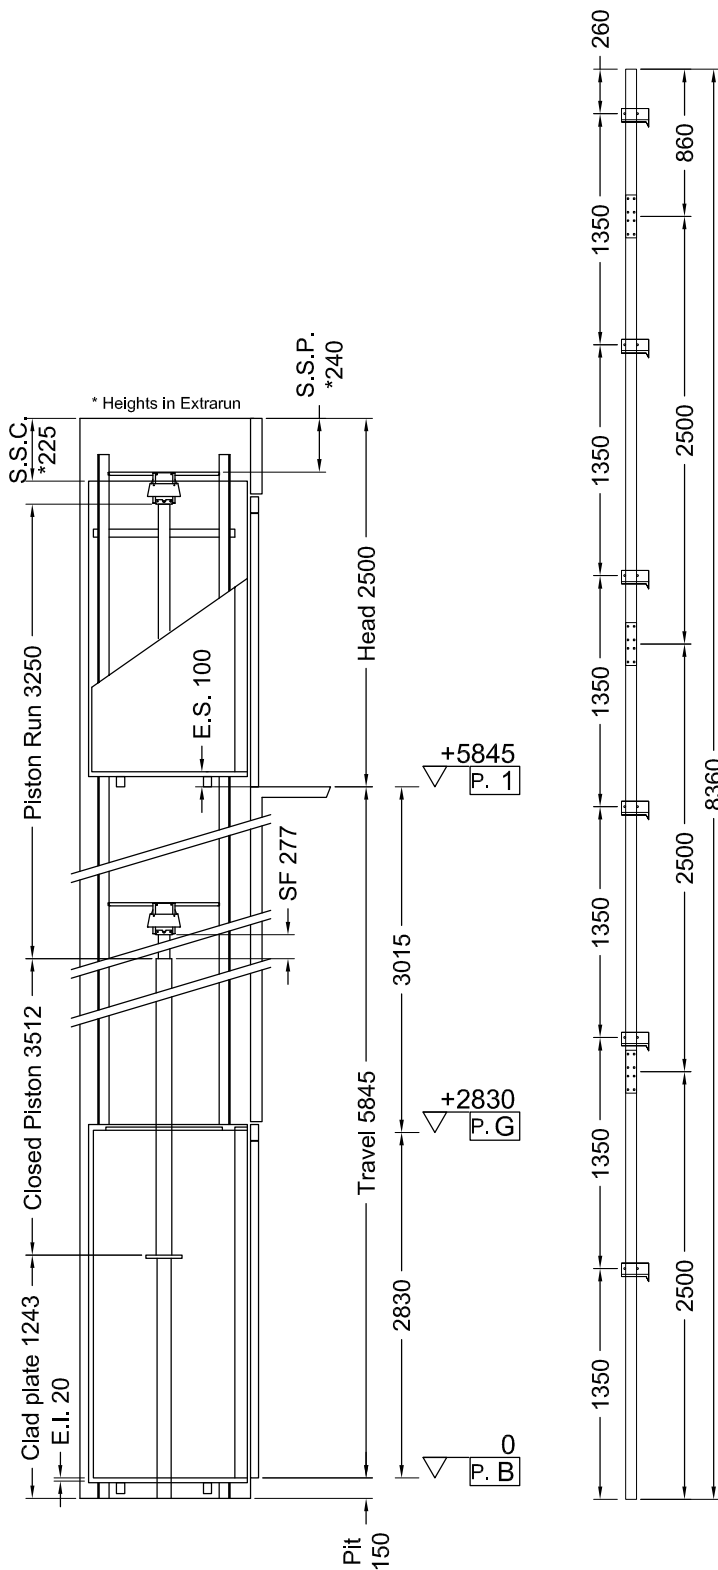

Indirect Installation Speed 0,3 m/s 02/03/15 10.18 (V.2851)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11705	P	(N)	599
N	(N)	807	N	(N)	8011
F1	(N)	1521	F1	(N)	2536
F2	(N)	326	F2	(N)	543

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	39,28
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	21,44
SF.	Piston extraction (mm)	277	Overpressure limit (bar)	54,99
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	2,9	Ropes	Ø 9 mm 6-(1+9+9)
Nominal current (A)	27	Cables length (mm) 2 x	11000
Piston	START Home (Ø)70x5x3250	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	B	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Side B
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	LABIRINT Led Strips - Bianco A1		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - False head device
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Automatic Control 2011
 - Cabin Buttons: **B G 1**

