

FLOOR DOOR


Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2	Not Supplied by EP	2000	2110		Absent		
		3	Not Supplied by EP	2000	2110		Absent		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V66 ()

ENVIRONMENT	VERSION	CLADDING	START	ROOF	ANCHORAGE
Inside	RAL 9006	Glass	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	RAL 9006	Vetro	Fondo Fossa	Per interno	

Side A

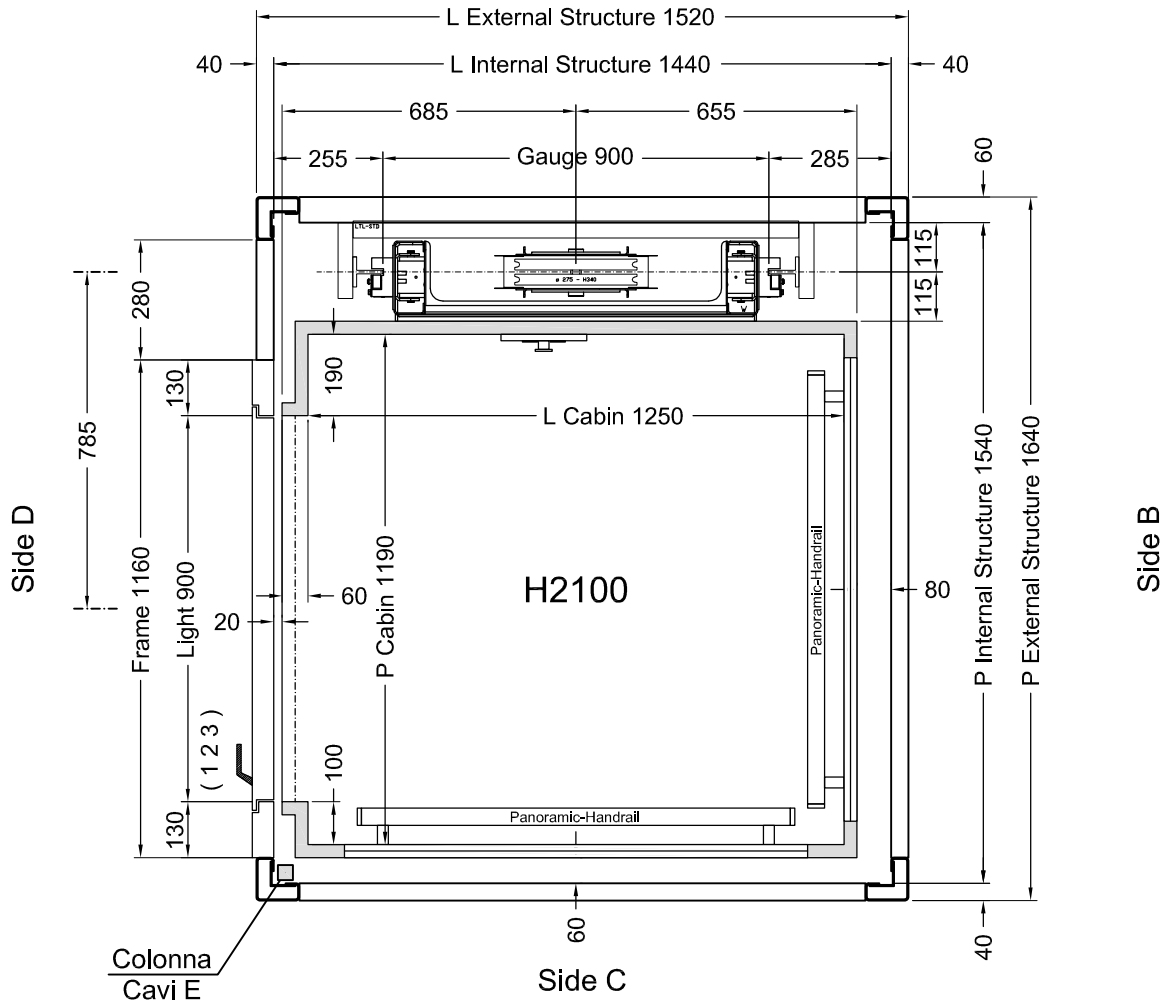

Customer own flooring: Dimensions **1280 (L) x 1190 (P)** thks **15 mm** Weight: **26 kg**


Stops: 3 - Doors: 3

Shaft in **Shaft V66 ()**

○		Designer	Date	Final Drawings	
	○			Model	SHEET
				ELFO	1/4
					SHEET DIMENS.
					A3
		Final Drawings D.Ogliastro	1° STESURA 23/10/13		SCALE 1:12.5
		CAPACITY	AREA m ²	CAPACITY	
		350 Kg	1,49		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Telefono da Lift Shop
- Fotocellula tutta parete
- Carter Tetto cabina
- Manovra automatica 2011

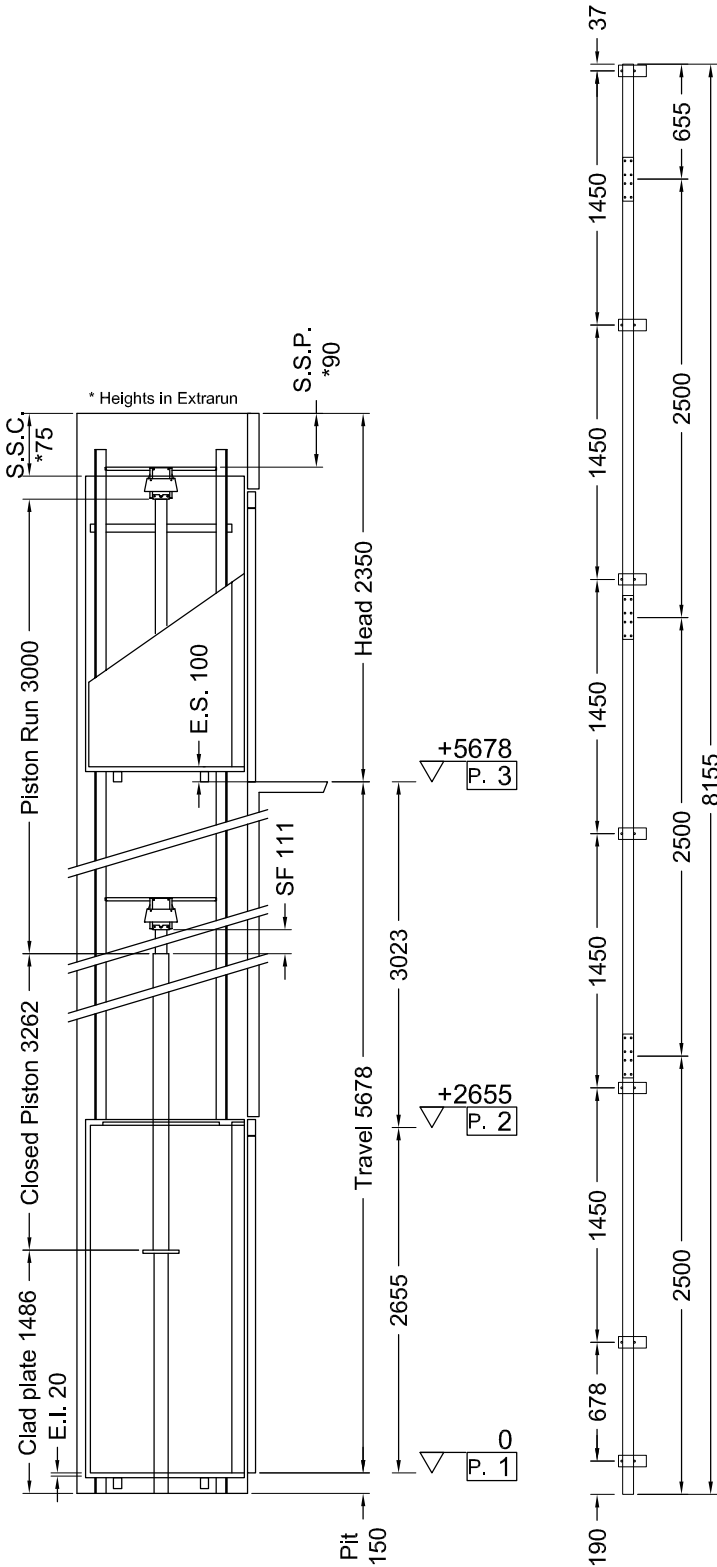

Indirect Installation	Speed 0,3 m/s	25/10/13 11.30 (V.2825)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12620	P	(N)	628
N	(N)	777	N	(N)	8562
F1	(N)	1814	F1	(N)	3023
F2	(N)	346	F2	(N)	577

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	41,2
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	23,36
SF.	Piston extraction (mm)	111	Overpressure limit (bar)	57,69
S.S.P.	Piston/head (mm)	90	Residual pressure (bar)	1,63
S.S.C.	Cabin/head (mm)	75		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 7
Power (Kw)	2,9	Cables	Ø 11 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	11000
Piston	START Homø 70x5x3000	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	9000		
Min hydraulic oil (L)	46		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ 10110

MACHINERY LOCATION			
At floor	1	Length of the hose travel	5000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Panoramic	Lati B,C
Finishes	Inox BA mecc.	Handrail	INOX S.B., Lati B,C
Oper. panel	VERTICAL	Outside covering	Side B,C,Roof
Floor	By Customer	Outside finishing	Similinox F12PPS
Roof	SPOTS LED - Inox Scotch Brte		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
False head device
Telephone by Lift Shop
Full height Infra-red curtain
<u>Roof covering</u>
Automatic control 2011

The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

Final Drawings	1° STESURA
D.Ogliastro	23/10/13
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/4