


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
	1 2		STANDARD RAL 9023	2000	2100	ABSENT				X		
	3		STANDARD RAL 9023	2000	2100	ABSENT				X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

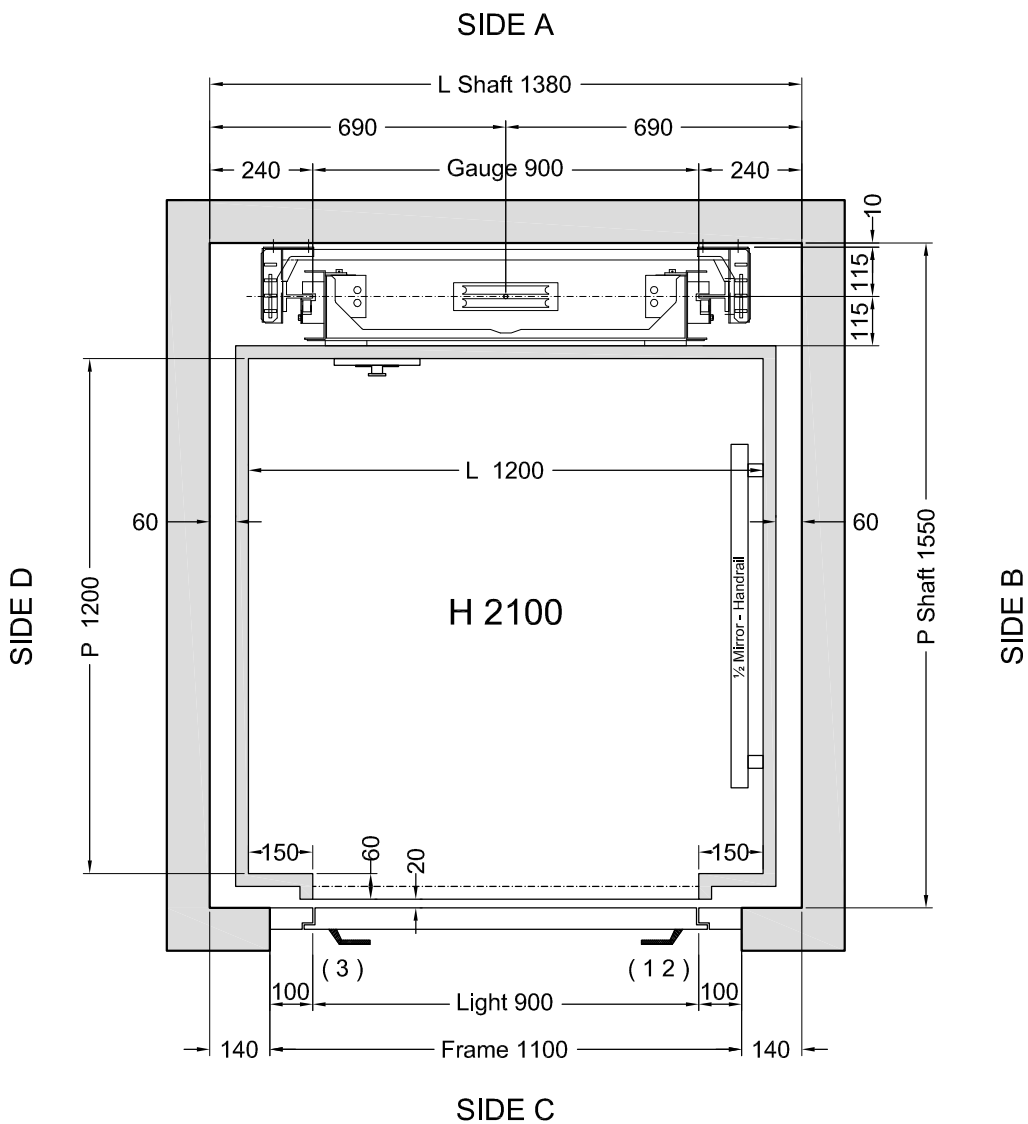


Pavimento a carico Cliente: Dim. 1200 (L) x 1230 (P) Spes. 15 mm Peso: 50 Kg (EN)

Stops: 3 - Doors: 3

Shaft on **MASONRY (MURATURA)**

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Manovra Automatica
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete

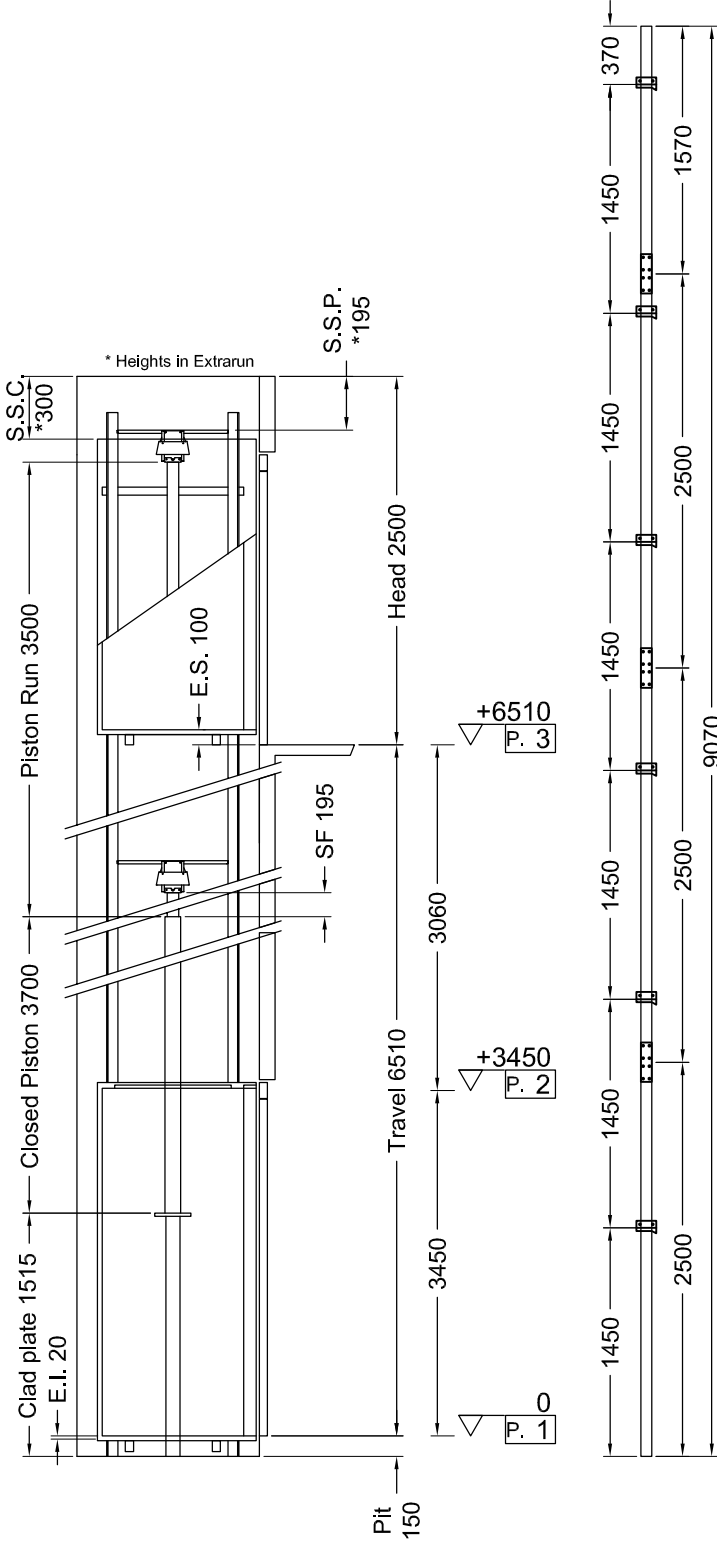

Indirect Installation	Speed 0,3 m/s	12/03/10 10.35	(V.020)
-----------------------	---------------	----------------	---------

THRUST DURING NORMAL OPERATION				THRUST OF SAFETY DEVICE INTERVENT.			
P	(N)	11415		P	(N)	619	
N	(N)	814		N	(N)	7805	
F1	(N)	1836		F1	(N)	3061	
F2	(N)	343		F2	(N)	572	

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	37,73
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	19,89
SF.	Piston extraction (mm)	195	Overpressure limit (bar)	52,83
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,61
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	Start 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	11600
Piston	Start Elevator(ø) 70x5x3500	Min actual breaking load (N)	42100
Opt. oil position	basso		
Tubing	Start		
Tubing lenght (mm)	7000		
Min hydraulic oil (L)	65		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	Start	1/2"03026/01;03026/02	IMQ CA50.00526
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Away from shaft (mm)	3000
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Handrail	INOX S.B.,Lati B
Finishes	Inox Scotch Brite	½ Mirror	Lati B
Oper. panel	A COLONNA		
Floor	a carico Cliente		
Roof	FARETTI-Bianco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Double speed
Automatic control
Reinforced arcade
Handles CASPIM
Full height infra-red curtain