

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G			Std. Aluminium Cov. + RAL 9006*	2000	2100	Std. Al. Cov. + RAL 9006*	Large	Transparent	C2
1		G 1	Std. Aluminium Cov. + RAL 9006*	2000	2100	Std. Al. Cov. + RAL 9006*	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad


Shaft V52 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	G + RAL *	See pages 3 and 4	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Z + RAL *	Vedi Pag. 3 e 4	Fondo Fossa	Per interno	

(*) Galvanized and RAL 9006

(*) Smooth finish - no raised edges

(*) Zincata e RAL 9006

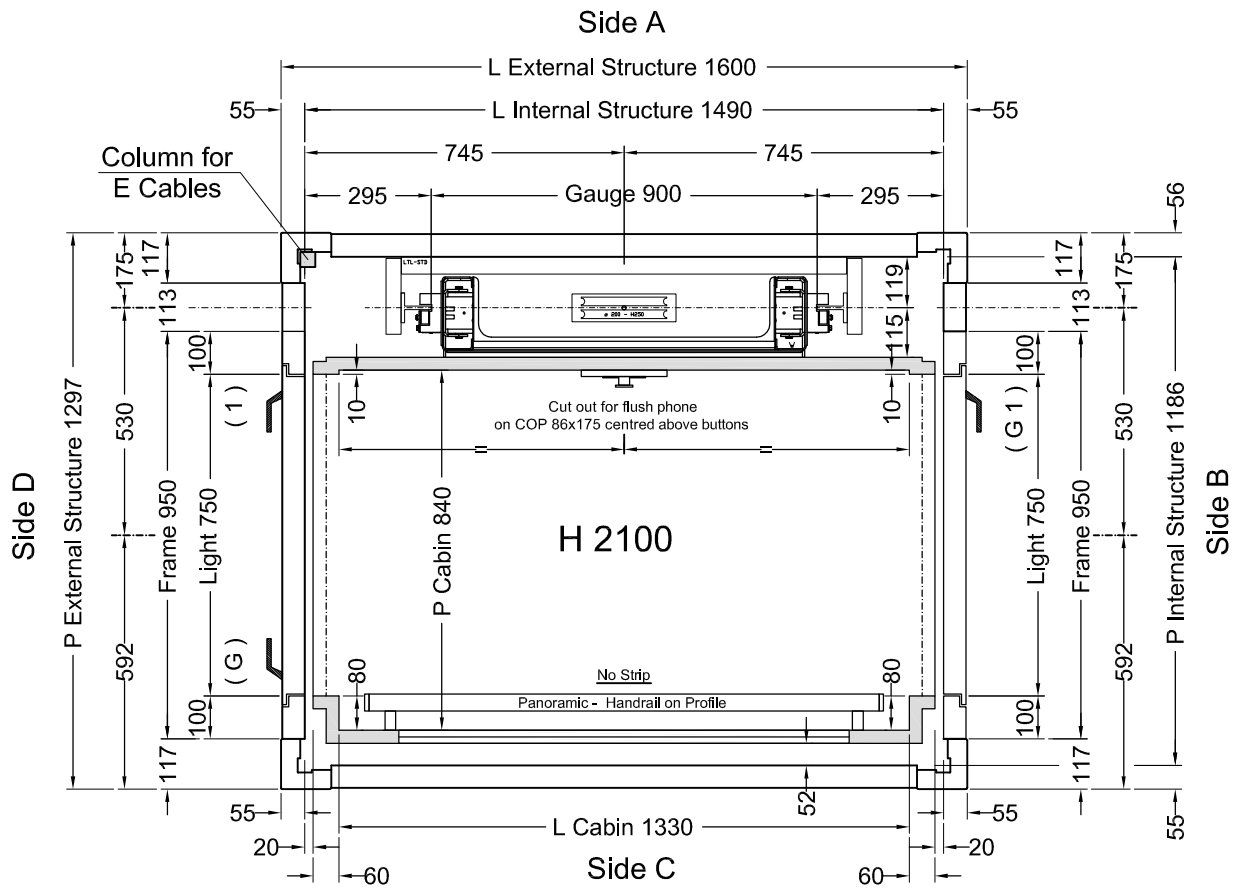


Feasibility n°2479 - Wall A & C

Stops: 2 - Doors: 4

Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1390 (L) x 840 (P)** thks **20 mm** Weight: **50 kg**

		Designer	Date	Rev. Final Drawings	
		L. Del Bianco	13/10/2015	Model	SHEET
		D.Ogliastro	26/08/2015	ELFO	1/4
		D.Tomei	20/07/2015	 Elfo	SHEET DIMENS.
		Final Drawings	1° STESURA		A3
		L. Del Bianco	10/09/15		SCALE
		CAPACITY	AREA m ²	CAPACITY	1:12.5
		300 kg	1,12		

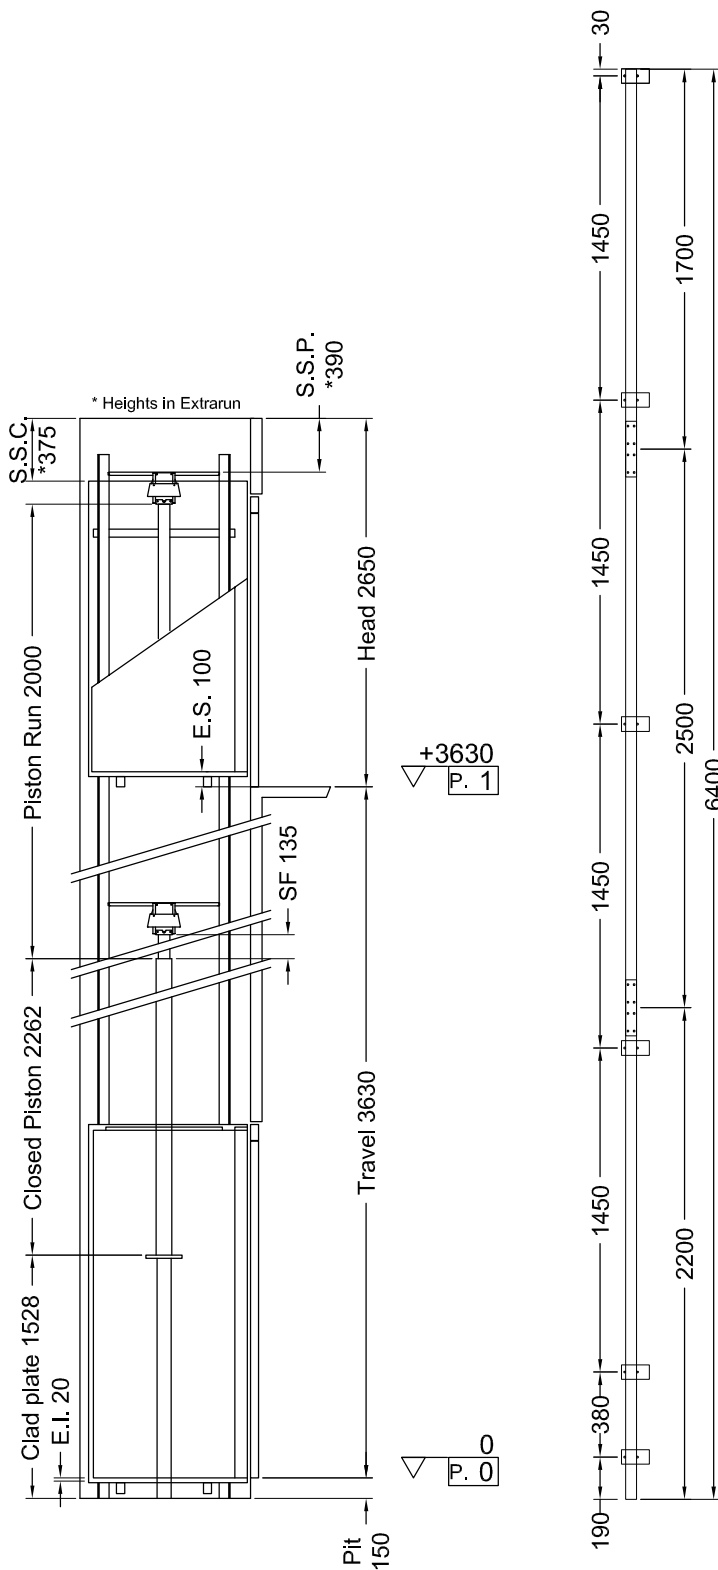

Indirect Installation Speed **0,3 m/s** 13/10/15 17.02 (V.2852) (6)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10451	P	(N)	501
N	(N)	585	N	(N)	7052
F1	(N)	1146	F1	(N)	1910
F2	(N)	302	F2	(N)	503

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	35,08
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	19,79
SF.	Piston extraction (mm)	Overpressure limit (bar)	49,11
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,3
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Ropes	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	9000
Nominal current (A)	27	Min actual breaking load (N)	47300
Piston	Start Home (Ø)70x5x2000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	5000		
Min hydraulic oil (L)	40		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Simillinox F12PPS	Panoramic	Side C - No Strip
Finishes	F41PPS	Handrail <u>On Profile</u>	Inox S.B., Side C
Oper. panel	VERTICAL (Like finishes) **	Outside covering	Side C, Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	DAMA Led Strips - Simillinox F12PPS		
(**) Centred			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Mechanic painted RAL 9006
Guides dimension 2.5 m
Piston painted RAL 9006
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM (Long)
Telephone by Lift Shop
Cabinet: Simillinox F12PPS
Full height Infra-red curtain V2
<u>Roof covering</u>
Automatic Control 2011
<u>Cut out for flush phone 86 mm x 175 mm centred above buttons on COP</u>
<u>Call Accept + Emergency manual descent from cabin</u>



Final Drawings	1° STESURA
L. Del Bianco	10/09/15
Rev. Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/4