


## FLOOR DOOR


Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	2	B 1	Alluminium	2000	2100	Anodized aluminium	Panoramic	Fumè	C2


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

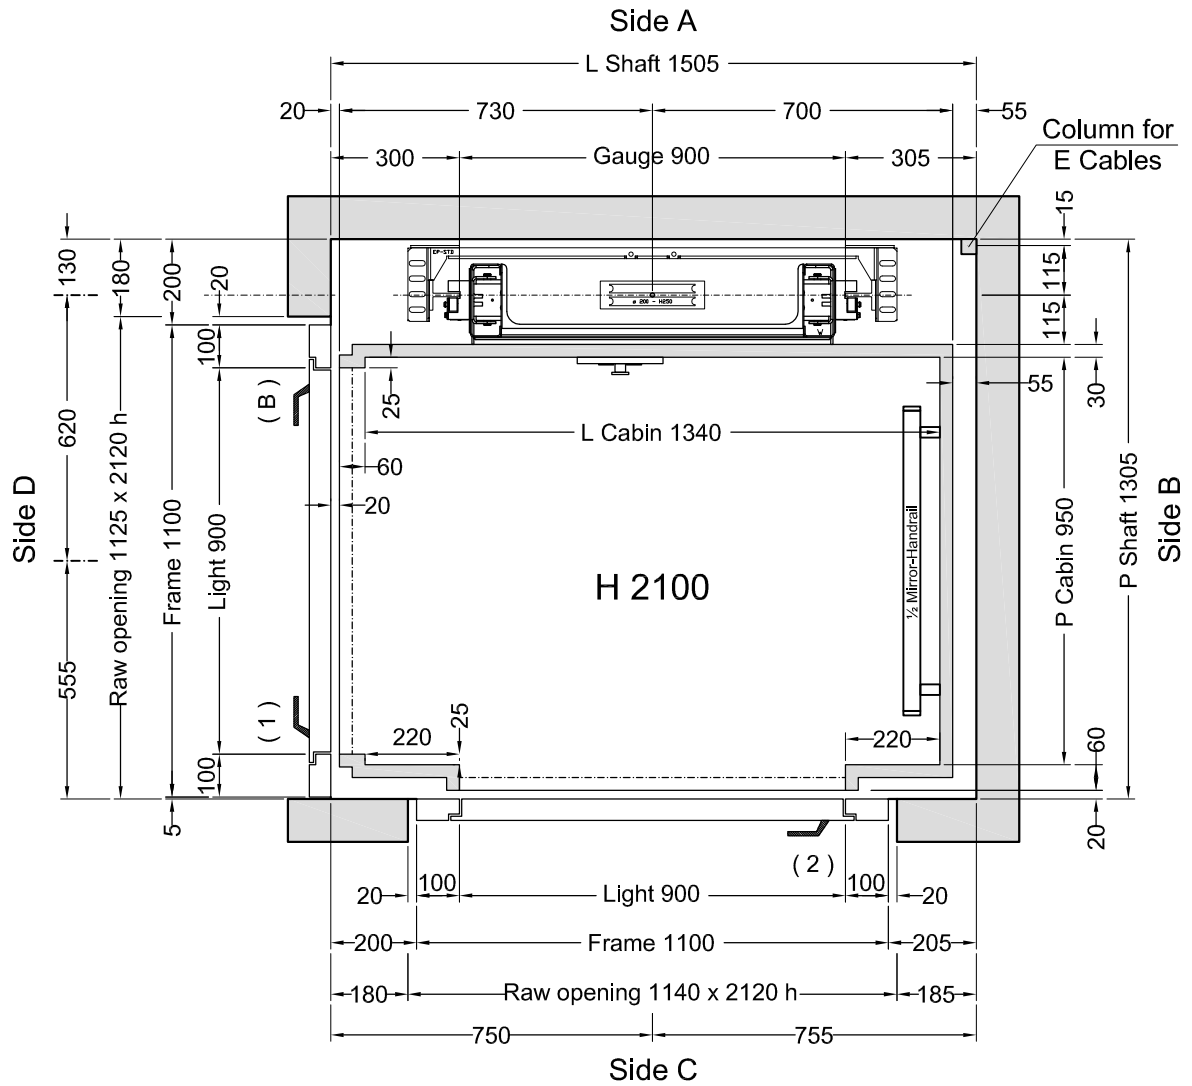

**Stops: 3 - Doors: 3**

Shaft in **Masonry (Muratura)**


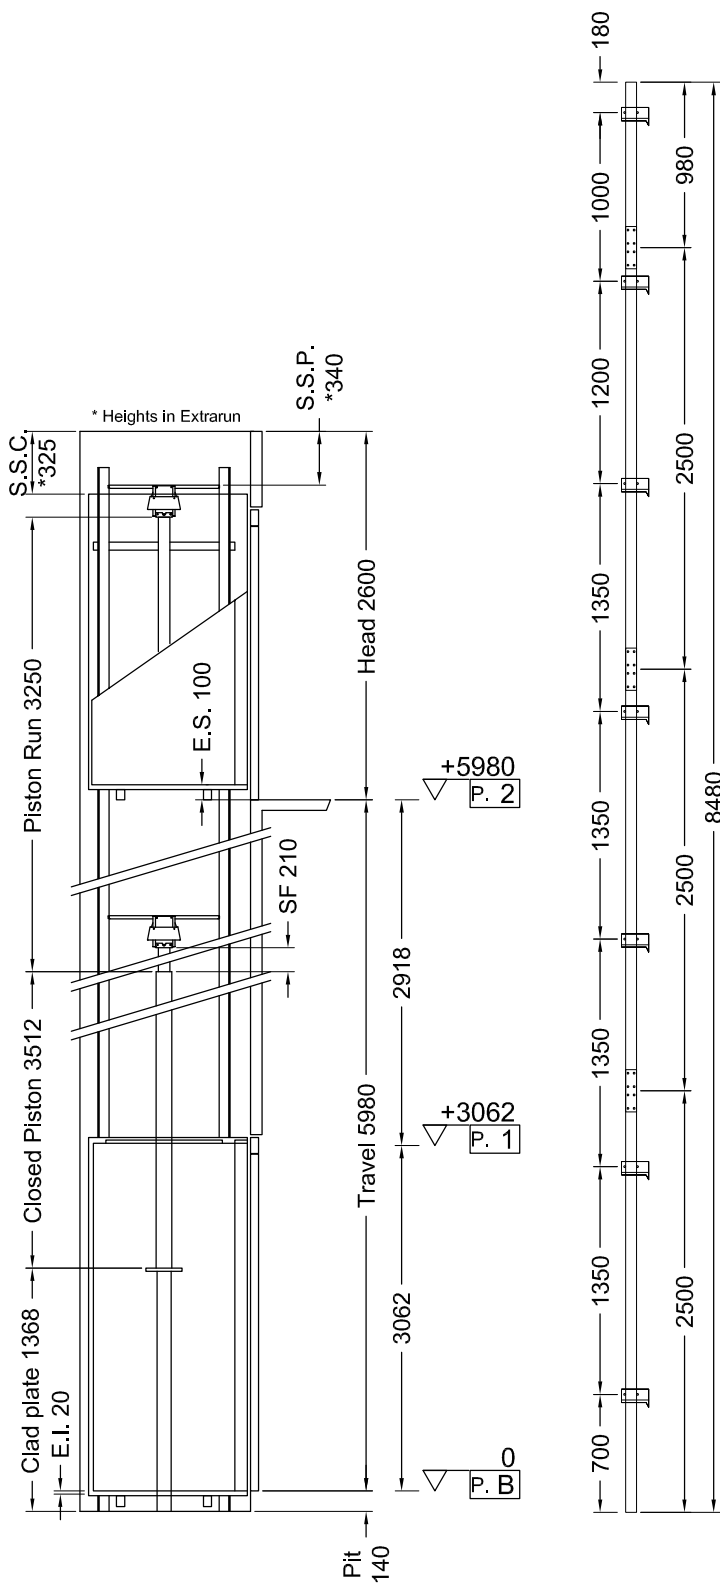
<b>Indirect Installation</b>		Speed <b>0,3 m/s</b>	30/04/15 11.58 (V.2852)
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) <b>10049</b>	P	(N) 599
N	(N) <b>828</b>	N	(N) 6928
F1	(N) <b>1229</b>	F1	(N) 2049
F2	(N) <b>318</b>	F2	(N) 529
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) <b>20</b>	Max static pressure	(bar) <b>32,52</b>
E.S.	Extrarun above cabin (mm) <b>100</b>	Min static pressure	(bar) <b>17,23</b>
SF.	Piston extraction (mm) <b>210</b>	Overpressure limit	(bar) <b>45,53</b>
S.S.P.	Piston/head (mm) <b>340</b>	Residual pressure	(bar) <b>1,56</b>
S.S.C.	Cabin/head (mm) <b>325</b>		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	<b>GMV HL 3010 (-*)</b>		
Capacity (l/min)	<b>35</b>	Guide rails	<b>70x70x9</b>
Motor (V)	<b>TF400V</b>	Brackets	(Nr) <b>7</b>
Power (Kw)	<b>2,9</b>	Ropes	$\varnothing$ <b>9 mm 6-(1+9+9)</b>
Nominal current (A)	<b>11</b>	Cables length (mm) 2 x	<b>11000</b>
Piston	<b>Start Home</b> ( $\varnothing$ ) <b>70x5x3250</b>	Min actual breaking load (N)	<b>47300</b>
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>11000</b>		
Min hydraulic oil (L)	<b>48</b>		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	
<b>MACHINERY LOCATION</b>			
At floor	<b>B</b>	Length of the hose travel	<b>6000 (mm)</b>
Cables enter in shaft: Side	<b>B</b>		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	<b>Bianco A1</b>	½ Mirror	<b>Side B</b>
Finishes	<b>Inox BA mecc.</b>	Handrail	<b>Inox Lucido, Side B</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>	Outside covering	<b>Roof</b>
Floor	<b>Gomma a Bolle - Nera</b>	Outside finishing	<b>SmilInox F12PPS</b>
Ceiling	<b>SPOTS LED - Bianco A1</b>		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Return to the lower floor after adjustable time			
Handles CASPIM (Long)			
Telephone by Lift Shop			
Full height infra-red curtain V2			
Power supply 400V			
Roof covering			
Automatic Control 2011			
Cabin buttons: <b>B 1 2</b>			
Call Accept			

