


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1	2	3	Standard Galvanized + RAL 9003*	2000	2100	Galvanized and RAL 9003*	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(\*) Smooth finish - No raised edges

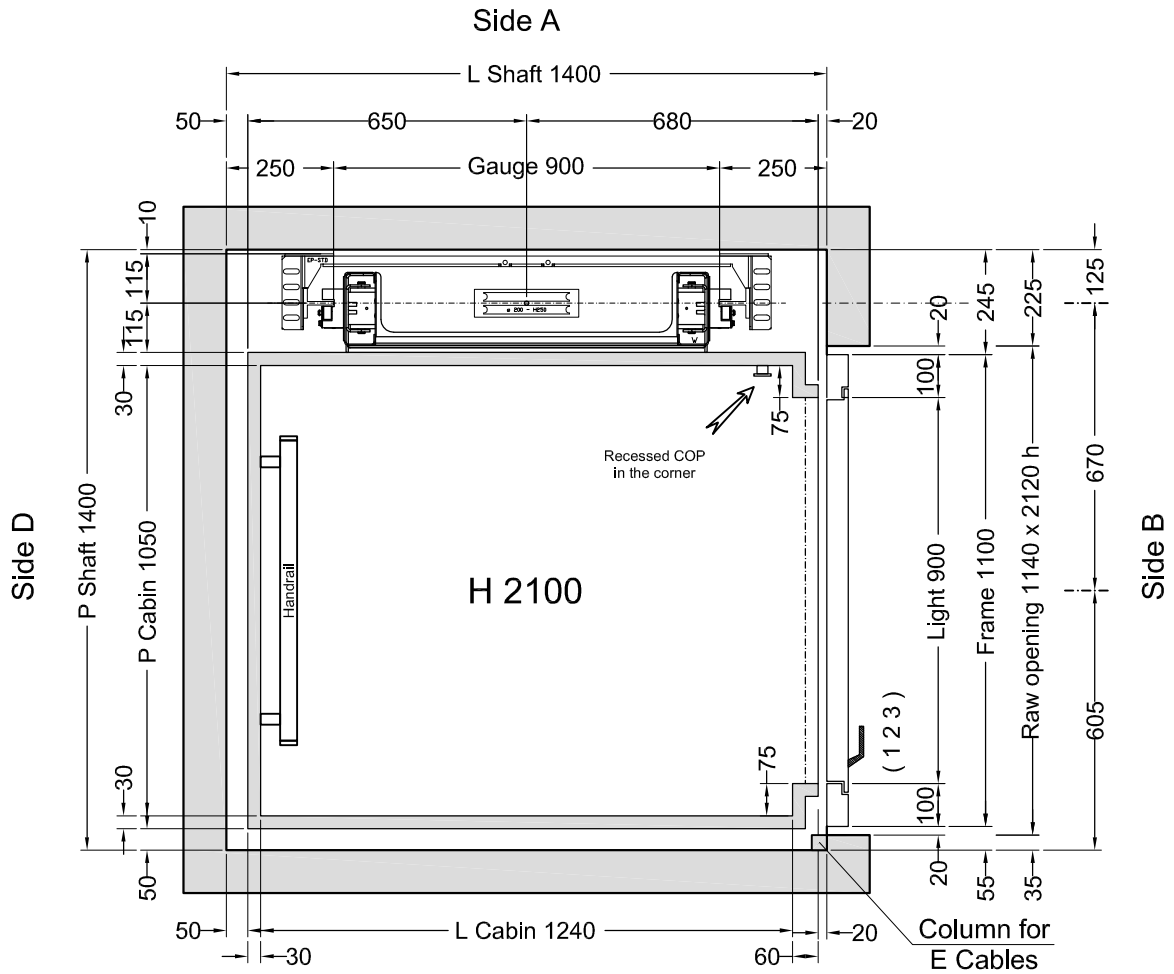

**Stops: 3 - Doors: 3**


Shaft in **Reinforced concrete (C.A.)**

**Feasibility n° 2074 - Recessed COP in the corner**

		Designer	Date	Final Drawings	
				Model	SHEET
		L. Del Bianco	09/09/14	ELFO	1/2
					A3
		CAPACITY	AREA m <sup>2</sup>	SCALE	
		300 kg	1,31	1:12.5	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

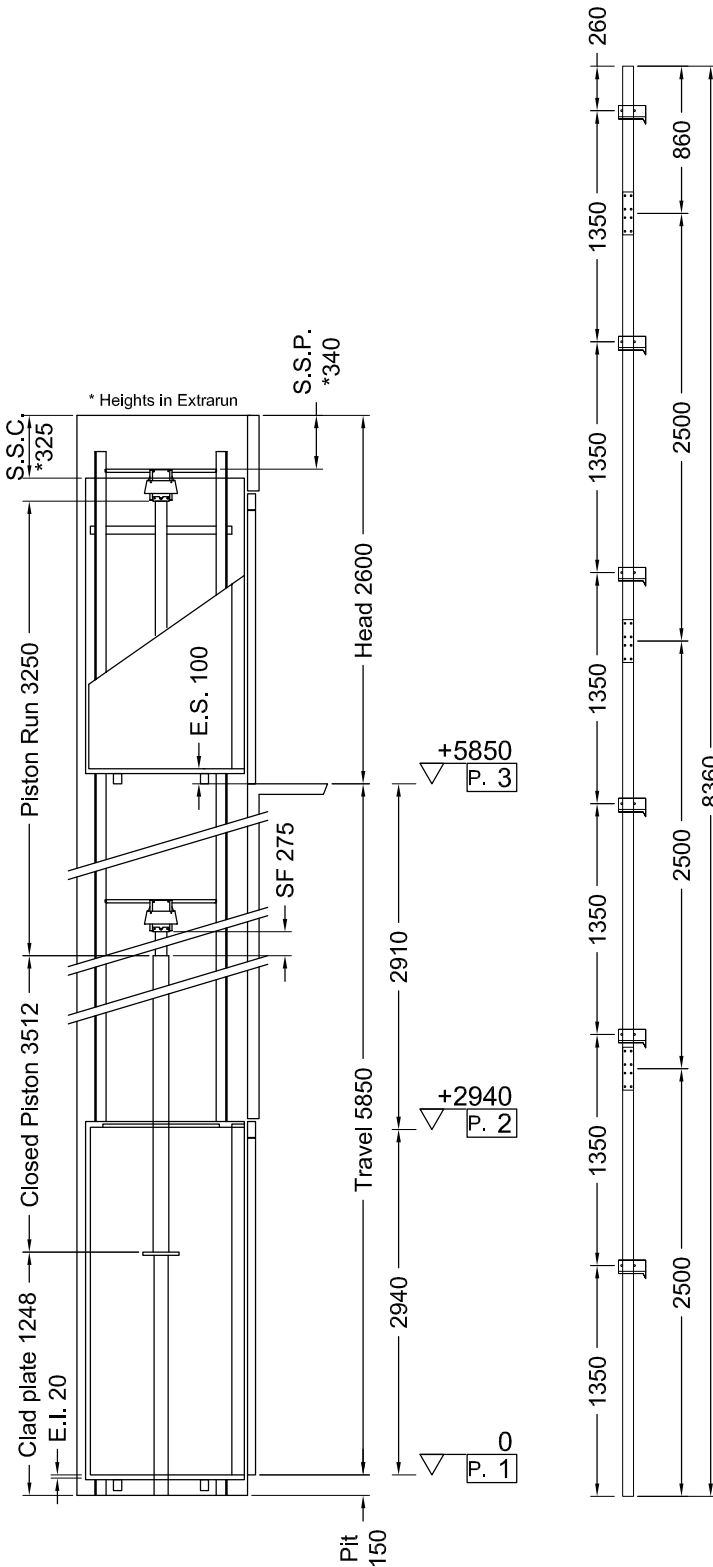

Indirect Installation	Speed 0,3 m/s	09/09/14 11.54 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10553	P	(N)	599
N	(N)	745	N	(N)	7182
F1	(N)	1365	F1	(N)	2275
F2	(N)	302	F2	(N)	504

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	33,89
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	18,59
SF.	Piston extraction (mm)	275	Overpressure limit (bar)	47,44
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Nominal current (A)	19	Cables length (mm) 2 x	11000
Piston	START Homø 70x5x3250	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Bianco A32PP	Handrail	Alluminium, Side D
Finishes	Bianco A32PP		
Oper. panel	VERTICAL ***		
Floor	Gomma a Bolle - Nera		
Ceiling	SPOTS LED - Bianco A32PP		
<i>(***) Recessed mounted in the corner</i>			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011



Final Drawings	1° STESURA
L. Del Bianco	09/09/14
<b>Final Drawings</b>	
SCALE	SHEET
OUT OF SCALE	2/2