


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		B G 1	Standard RAL 9011 *	2000	2100	RAL 9011 *	P1 Max	Black Glass	

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) *Matt finish - No raised edges - Framed in Aluminium Surrounds Painted like doors*

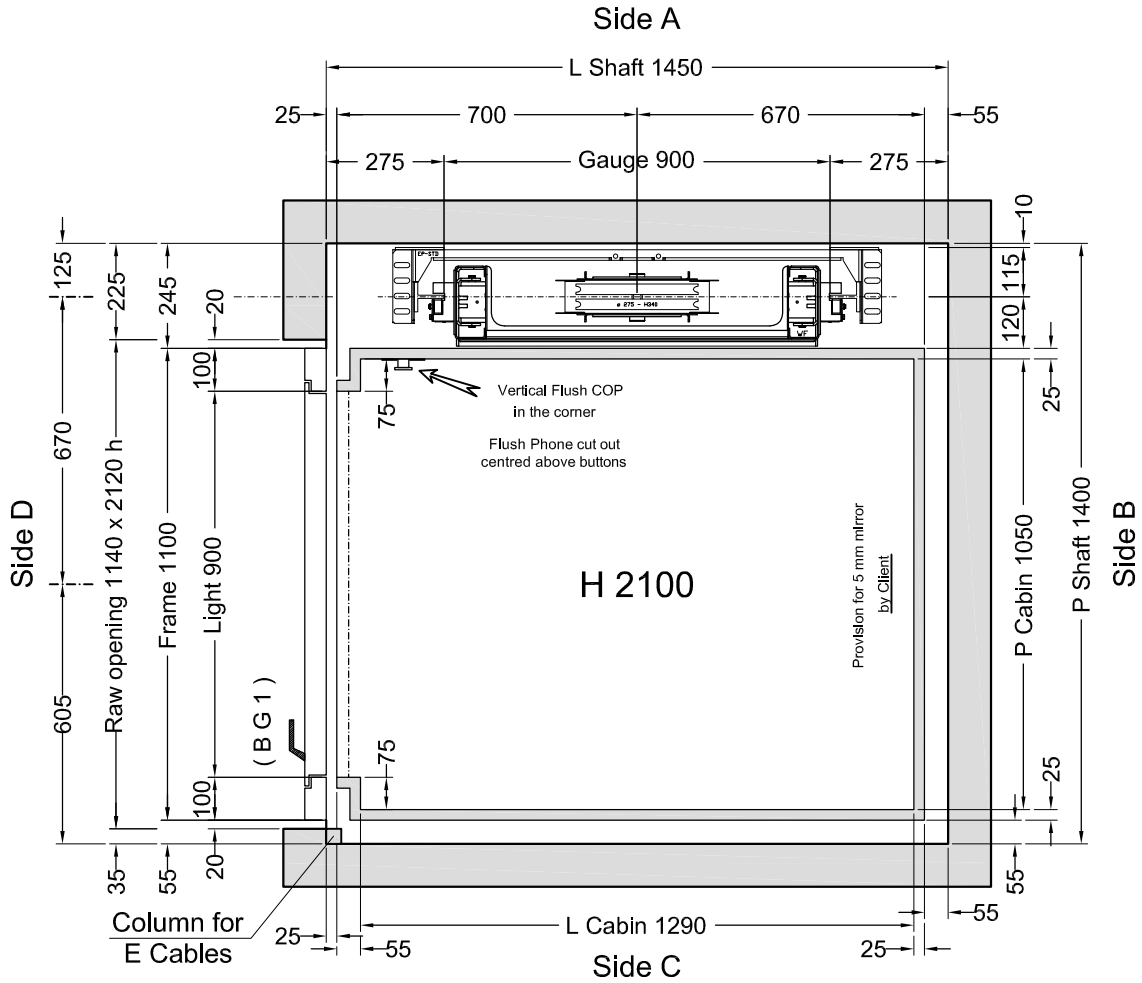


Cabina
Classica

Feasibility n° 2784 - COP - Black Glass - Mirror

Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1315 (L) x 1050 (P)** thks **20 mm** Weight: **50 kg**

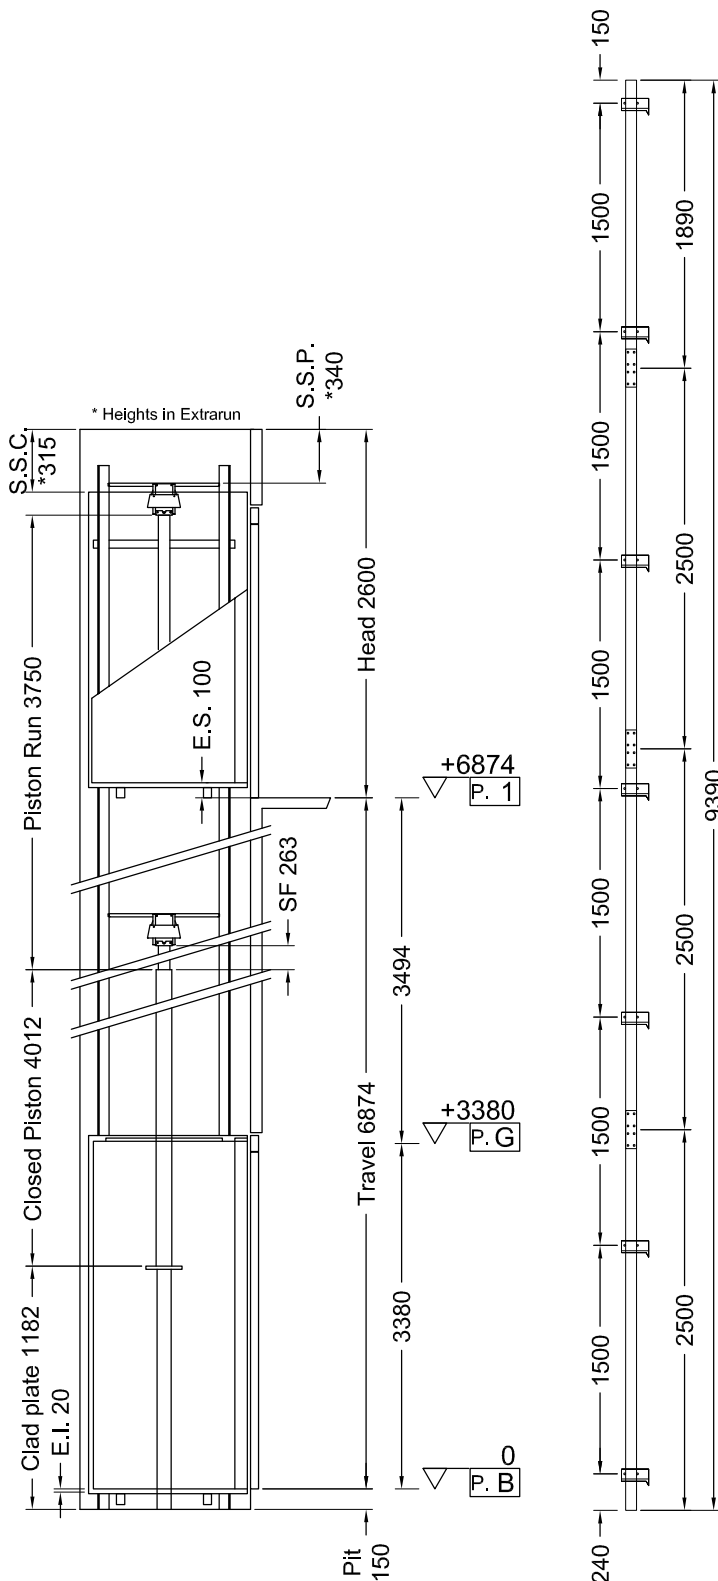

Indirect Installation Speed 0,3 m/s 29/04/16 09.49 (V.2891)

THRUST DURING NORMAL OPERATION				THRUST OF SAFETY DEVICE INTERVENT.			
P	(N)	11186		P	(N)	687	
N	(N)	914		N	(N)	7684	
F1	(N)	1498		F1	(N)	2496	
F2	(N)	339		F2	(N)	565	

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,26
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	19,96
SF.	Piston extraction (mm)	263	Overpressure limit (bar)	49,36
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,79
S.S.C.	Cabin/head (mm)	315		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Ropes	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	27	Min actual breaking load (N)	47300
Piston	Start Home (Ø)70x5x3750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	49		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	B	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	B		

CABIN	CABIN ACCESSORIES
Panels	Side A & C: Bronzo Satinato - Side B provision for 5 mm mirror by Client
Finishes	Bronzo Satinato
Oper. panel	Vertical Flush mounted - Corner A/D - Bronzo Satinato
Floor	By Customer
Ceiling	SPOTS LED - Blanco A32PP

OTHER ACCESSORIES

- Enabling key for the cabin button pad, double insertion
- Guides dimension 2.5 m
- Manual pump
- Manostat with overweight signal
- Two speed
- Doors without handles (and without holes for handles)
- Telephone by Lift Shop
- Full height Infra-red curtain V2
- Automatic Control 2011
- Call Accept
- Emergency manual descent from cabin
- Cabin Buttons: "B, G, 1"
- Cut out for flush phone 86 mm x 175 mm on centred above buttons

