


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1			2 Panels Galvanized sheet *	2000	2210	Galvanized sheet	Absent		
2			2 Panels <u>Full Glass</u>	2000	2210	RAL 9003	Panoramic	Transparent	
3			2 Panels Galvanized sheet *	2000	2210	Galvanized sheet	Absent		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Rear door clad with solid galvanized

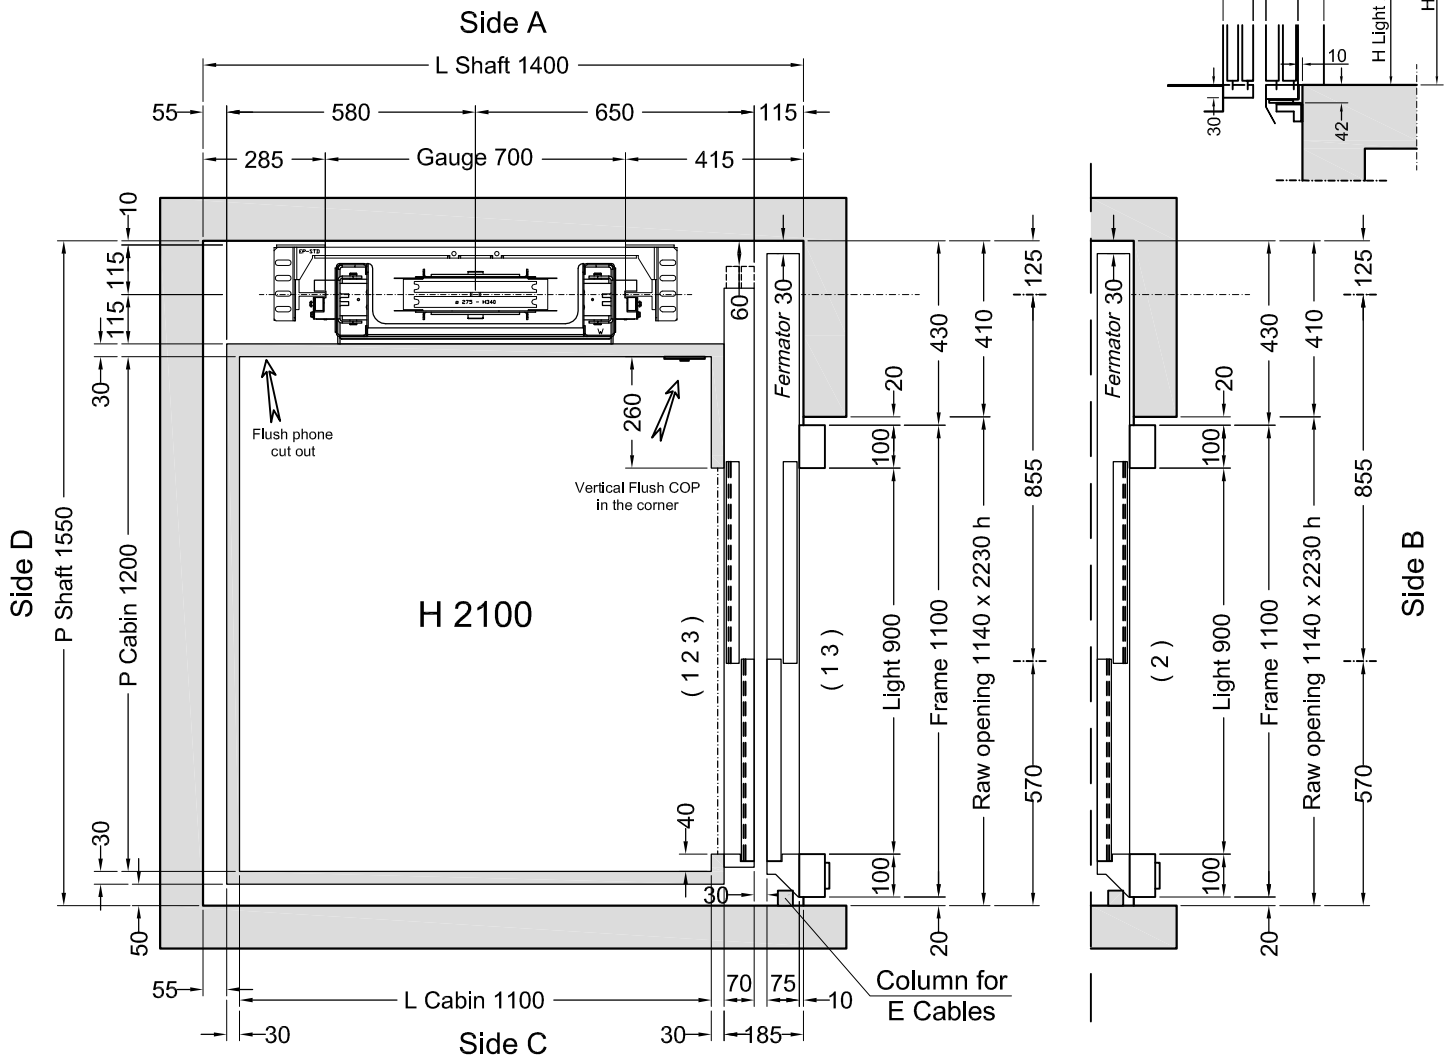


Feasibility n° 2249 - Wall Side A

Stops: 3 - Doors: 3

Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1130 (L) x 1200 (P)** thks **20 mm** Weight: **50 kg**

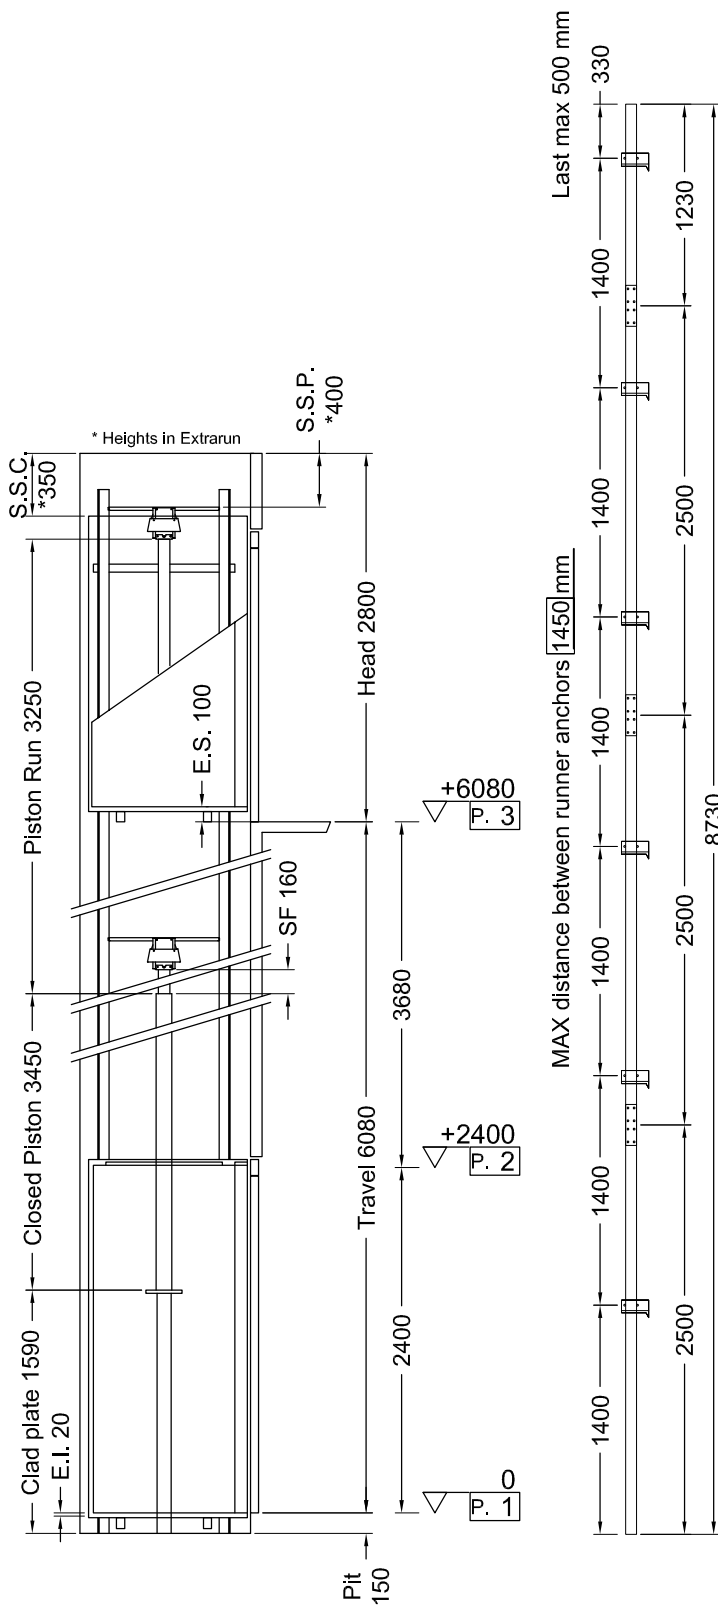

Indirect Installation Speed 0,28 m/s 26/06/15 12.07 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	13133	P	(N)	687
N	(N)	832	N	(N)	8900
F1	(N)	1761	F1	(N)	2935
F2	(N)	271	F2	(N)	452

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	33,75
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,09
SF.	Piston extraction (mm)	160	Overpressure limit (bar)	47,25
S.S.P.	Piston/head (mm)	400	Residual pressure (bar)	1,37
S.S.C.	Cabin/head (mm)	350		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	43	Guide rails	70x70x9
Motor (V)	TF400V	Brackets	(Nr) 6
Power (Kw)	3,4	Ropes	Ø 11 mm 6-(1+9+9)
Nominal current (A)	14	Cables lenght (mm) 2 x	12000
Piston	START SL (Ø) 80x5x3250	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing lenght (mm)	8000		
Min hydraulic oil (L)	54		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	B		

CABIN		CABIN ACCESSORIES	
Panels	Galvanized sheet	Outside covering	Roof
Finishes	RAL 9003 smooth finish	Outside finishing	Grigio PPS1
Oper. panel	Vertical Flush mounted - Inox Scotch Brite		
Floor	By Customer		
Ceiling	SPOTS LED - Blanco A1		
Cabin Doors	Side B: 2-Panels Automatic Sliding doors, <u>Transparent Full Glass</u>		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
Telephone by Lift Shop
Cabinet: SimlInox F12PPS
Full height infra-red curtain V2
Power supply 400V
Roof covering
Automatic Control 2011
Door Open Button on C.O.P.
Call Accept
Cut out for flush phone 86 mm x 175 mm 1400 from floor (F.2246)