


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		B G 1	Alluminium	2000	2100	Anodized Aluminium	Panoramic	Etched Neutral	C2


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

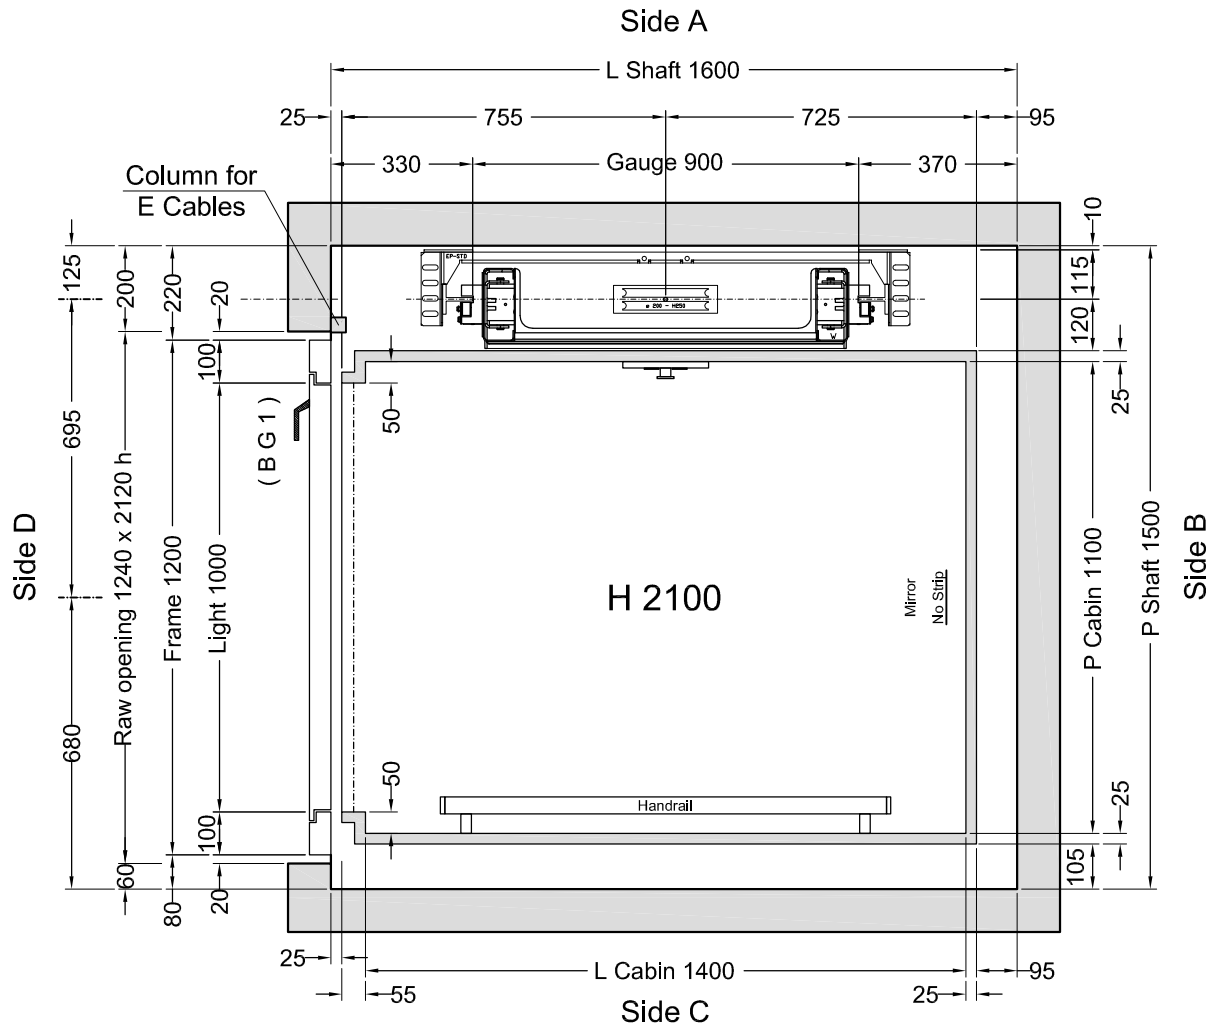

Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1425 (L) x 1100 (P)** thks **15 mm** Weight: **50 kg**

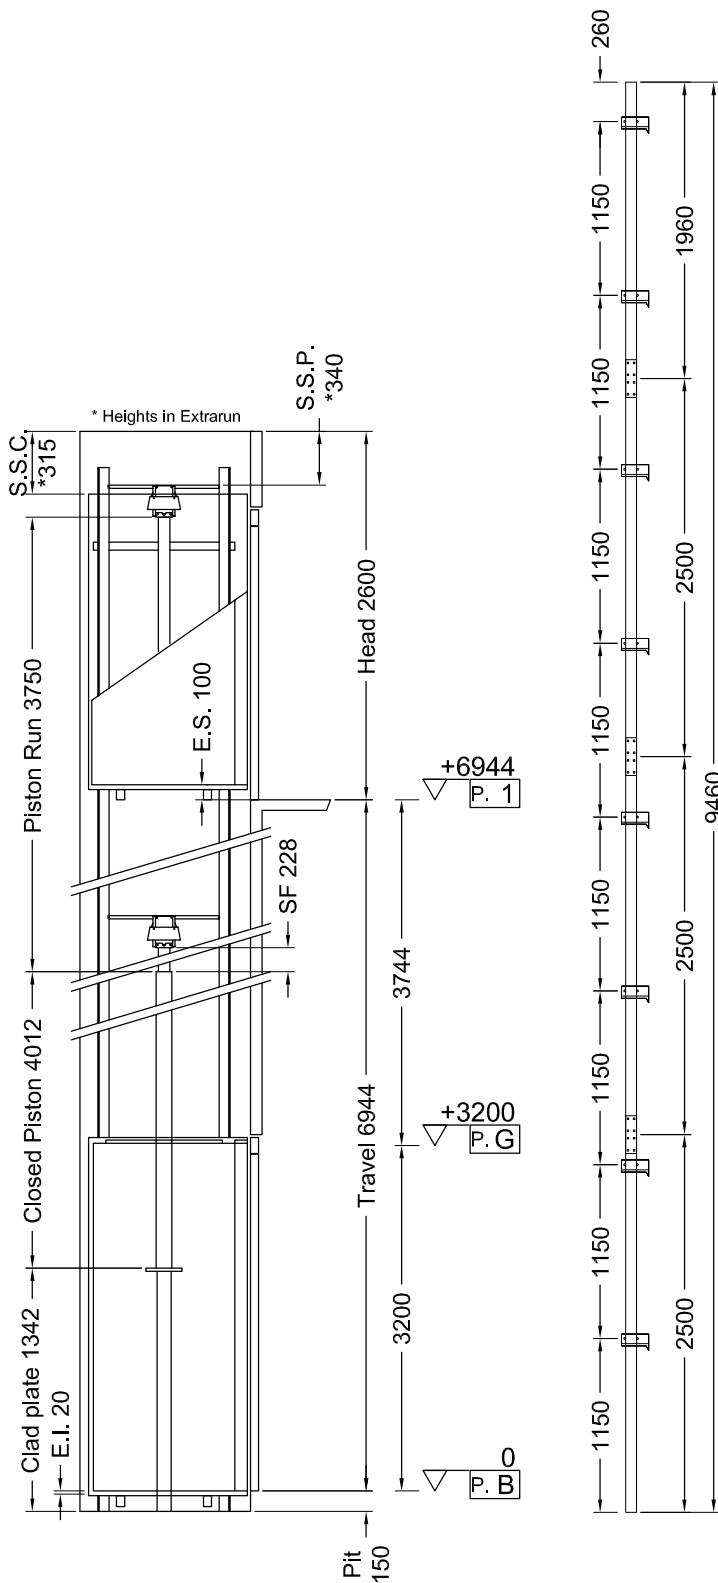

Indirect Installation Speed **0,3 m/s** 12/01/16 11.43 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12902	P	(N)	638
N	(N)	921	N	(N)	8884
F1	(N)	1744	F1	(N)	2906
F2	(N)	397	F2	(N)	661

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	39,04
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	23,74
SF.	Piston extraction (mm)	Overpressure limit (bar)	54,65
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,66
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 8
Motor (V)	MF230V	Ropes	\varnothing 9 mm 8-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Nominal current (A)	27	Min actual breaking load (N)	51000
Piston	Start Home (\varnothing) 70x5x3750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	8000		
Min hydraulic oil (L)	50		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	B	Length of the hose travel	4000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Laminate 0509 vg FRH **	Mirror No Strip	Side B
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side C
Oper. panel	VERTICAL (Like finishes)	Outside covering	Roof
Floor	By Customer	Outside finishing	SimlInox F12PPS
Ceiling	SPOTS LED - F41PPS		
(**) <i>Textured Black</i>			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
<u>Two speed</u>
Handles CASPIM (Long)
<u>Telephone by Lift Shop</u>
Cabinet: SimlInox F12PPS
Full height infra-red curtain V2
<u>Roof covering</u>
Automatic Control 2011
Blue Buttons - Cabin Buttons "B G 1"
Call Accept + Emergency manual descent from cabin

