

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1	2 Panels <u>Full Glass RAL 9003 Smooth</u>	2000	2210	RAL 9003 Smooth	<u>Full Glass</u>	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad


Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Outside	G + RAL *	Glass	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vetro	Fondo Fossa	Per esterno	

(*) Galvanized and RAL 7046 Smooth

(*) Zincata e RAL 7046 Liscio

Structure Uprights thks 4 mm
Montanti Struttura sp. 4 mm

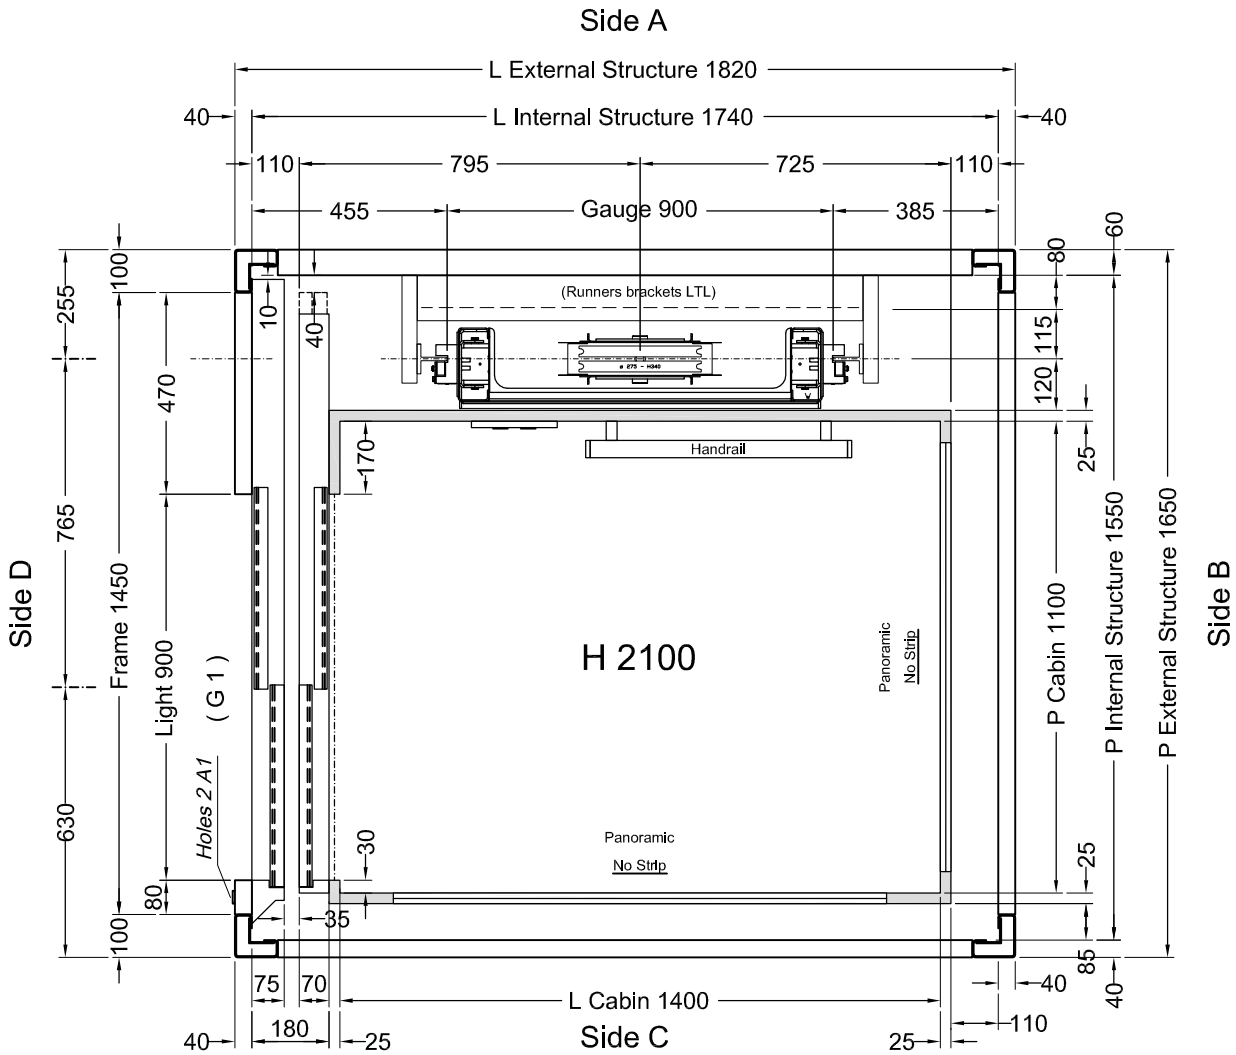


Cabina
Classica

1
G

Stops: 2 - Doors: 2

Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1425 (L) x 1100 (P)** thks **20 mm** Weight: **50 kg**

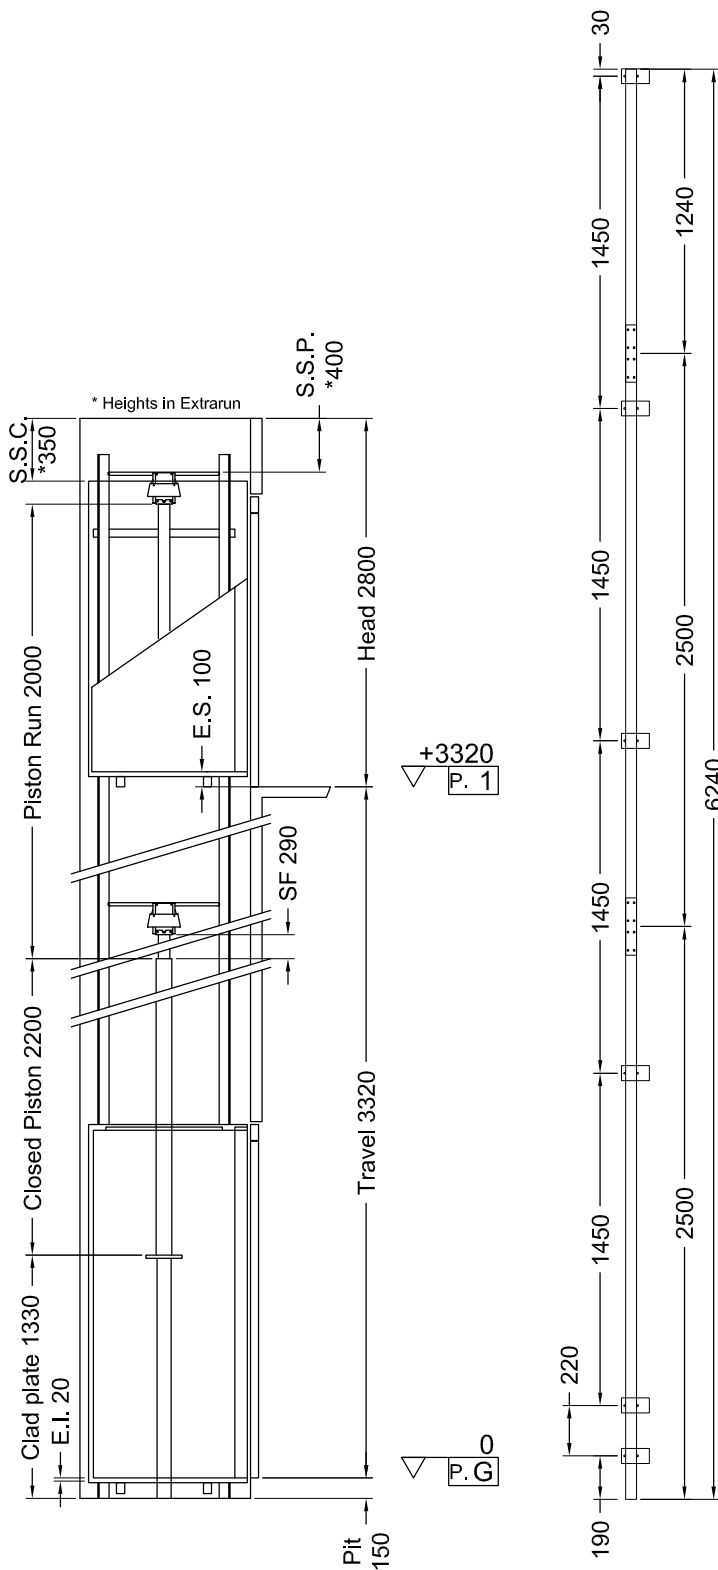

Indirect Installation Speed 0,30 m/s 25/03/16 14.22 (V.2876)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	14324	P	(N)	574
N	(N)	569	N	(N)	9544
F1	(N)	1825	F1	(N)	3042
F2	(N)	372	F2	(N)	620

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,66
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22
SF.	Piston extraction (mm)	290	Overpressure limit (bar)	49,93
S.S.P.	Piston/head (mm)	400	Residual pressure (bar)	1,14
S.S.C.	Cabin/head (mm)	350		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	43	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	3,4	Ropes	Ø 11 mm 6-(1+9+9)
Nominal current (A)	32	Cables length (mm) 2 x	9000
Piston	START SL (Ø)80x5x2000	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	44		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Avorio PPS11	Panoramic	No Strip Side B, C
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side A
Oper. panel	VERTICAL (Like finishes)	Outside covering	Side B, C
Floor	By Customer	Outside finishing	SimlInox F12PPS
Ceiling	UNIVERSAL - Avorio PPS11		
Cabin Doors	Side D: 2-Panels Automatic Sliding doors, Transparent Full Glass, RAL 9003 Smooth		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 -
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Automatic Control 2011
 - Call Accept
 - Emergency manual descent from cabin
 - Cabin Buttons: "G, 1"
 - Door Open Button on C.O.P.