


ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Telefono da Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

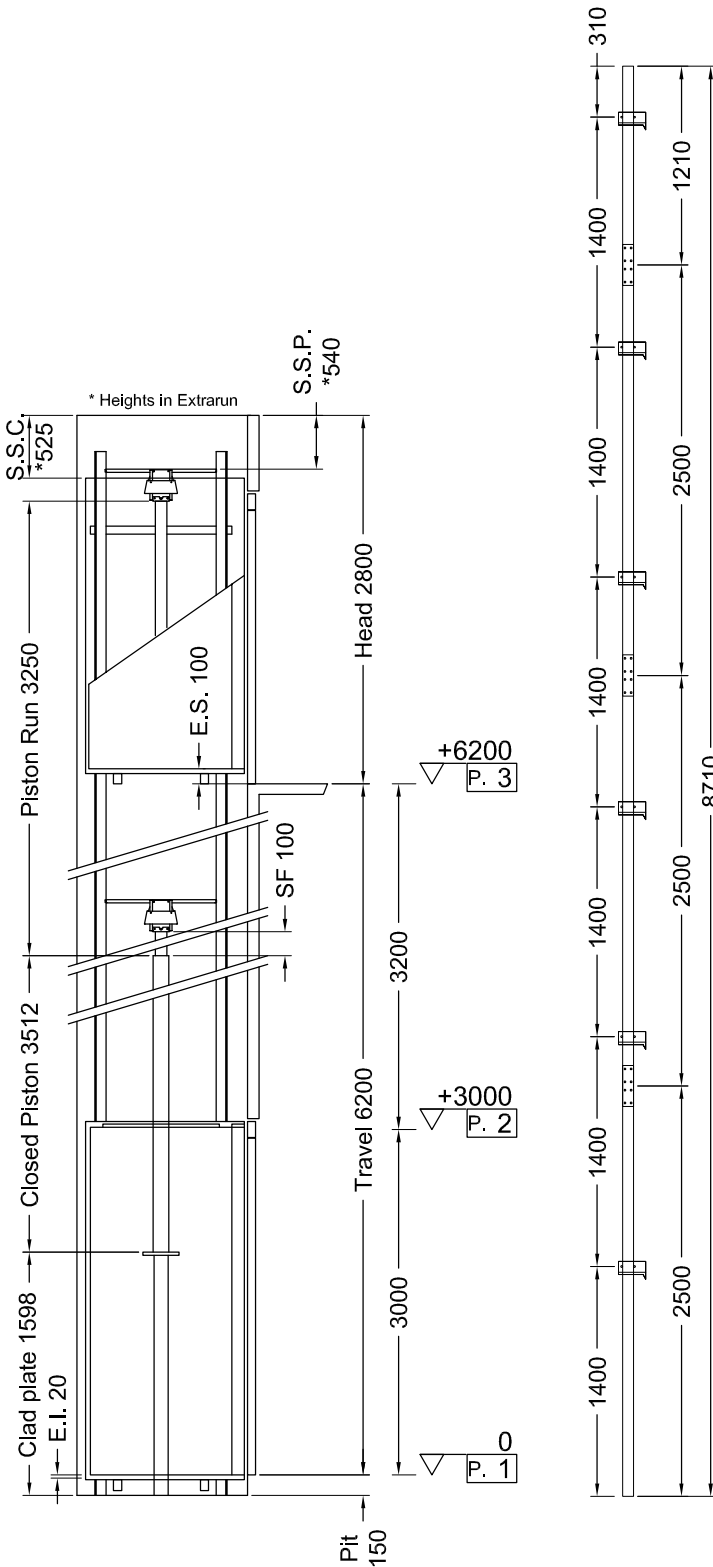

Indirect Installation	Speed 0,3 m/s	07/03/14 11.53 (V.2840)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12655	P	(N)	599
N	(N)	813	N	(N)	8651
F1	(N)	1756	F1	(N)	2927
F2	(N)	390	F2	(N)	650

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	38,24
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,94
SF.	Piston extraction (mm)	100	Overpressure limit (bar)	53,53
S.S.P.	Piston/head (mm)	540	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)	525		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	2,9	Cables	Ø 9 mm 8-(1+9+9)
Corrente (A)	19	Cables lenght (mm) 2 x	12000
Piston	START Homø 70x5x3250	Min actual breaking load (N)	51000
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	11000		
Min hydraulic oil (L)	48		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	3	Length of the hose travel	4000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Grigio PPS1	½ Mirror	Lati D
Finishes	Inox BA mecc.	Handrail	INOX LUCIDO, Lati D
Oper. panel	VERTICAL		
Floor	By Customer		
Ceiling	LABIRINT - Blanco A1 - Led strips		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011