


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1	2 3		Villa	2000	2100	S.S. covering: Scotch Brite	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

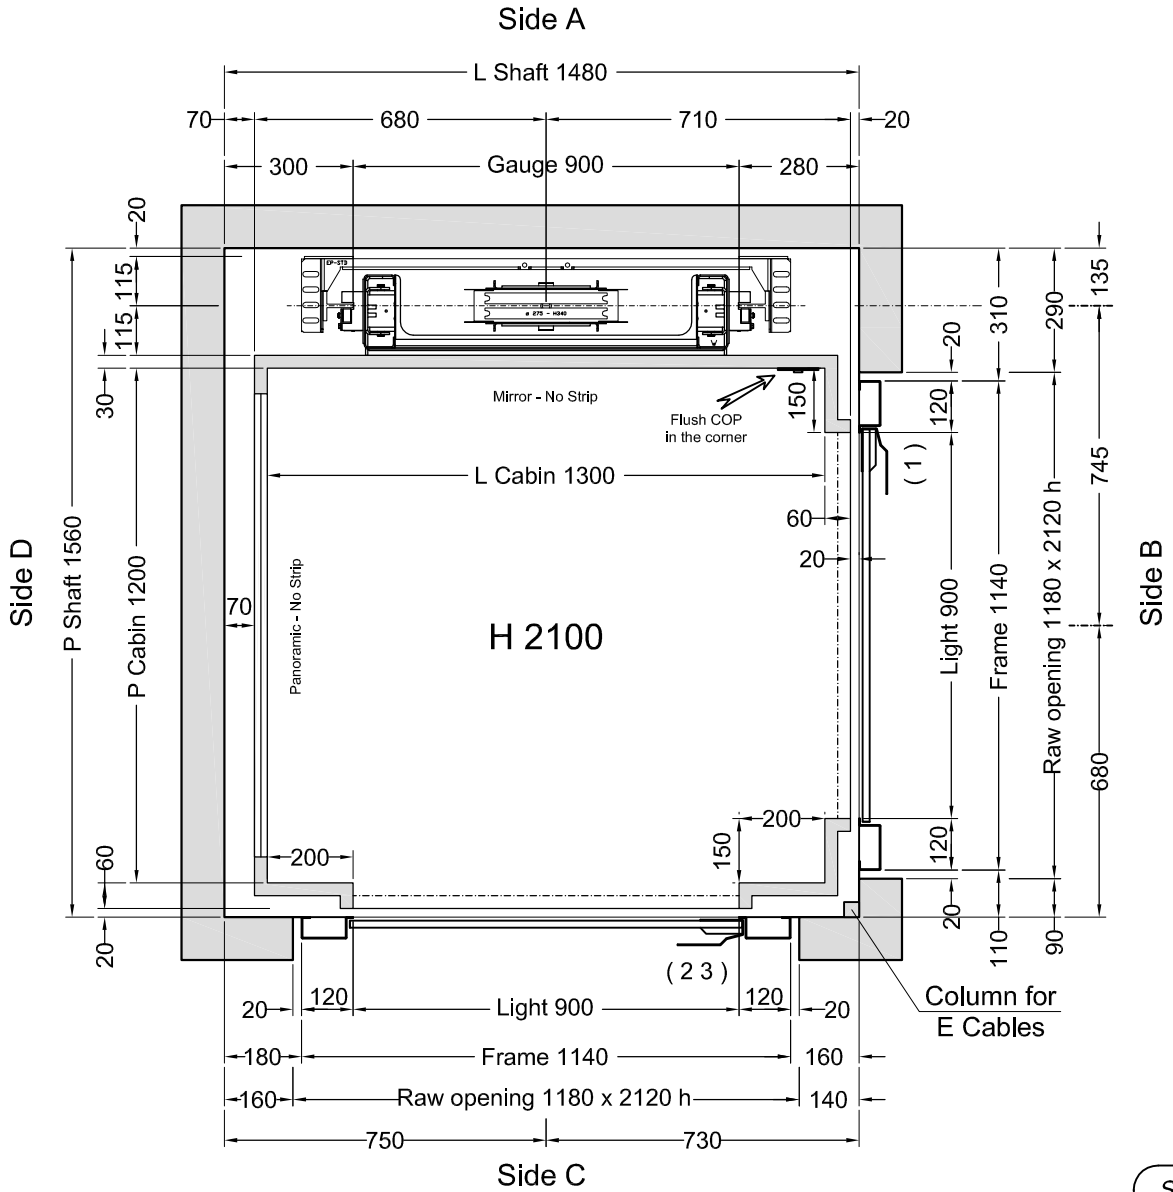


Snaps 0001

Feasibility n° 2142 - Cabin 1.3x1.2 m

Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1330 (L) x 1230 (P)** thks **20 mm** Weight: **50 kg**

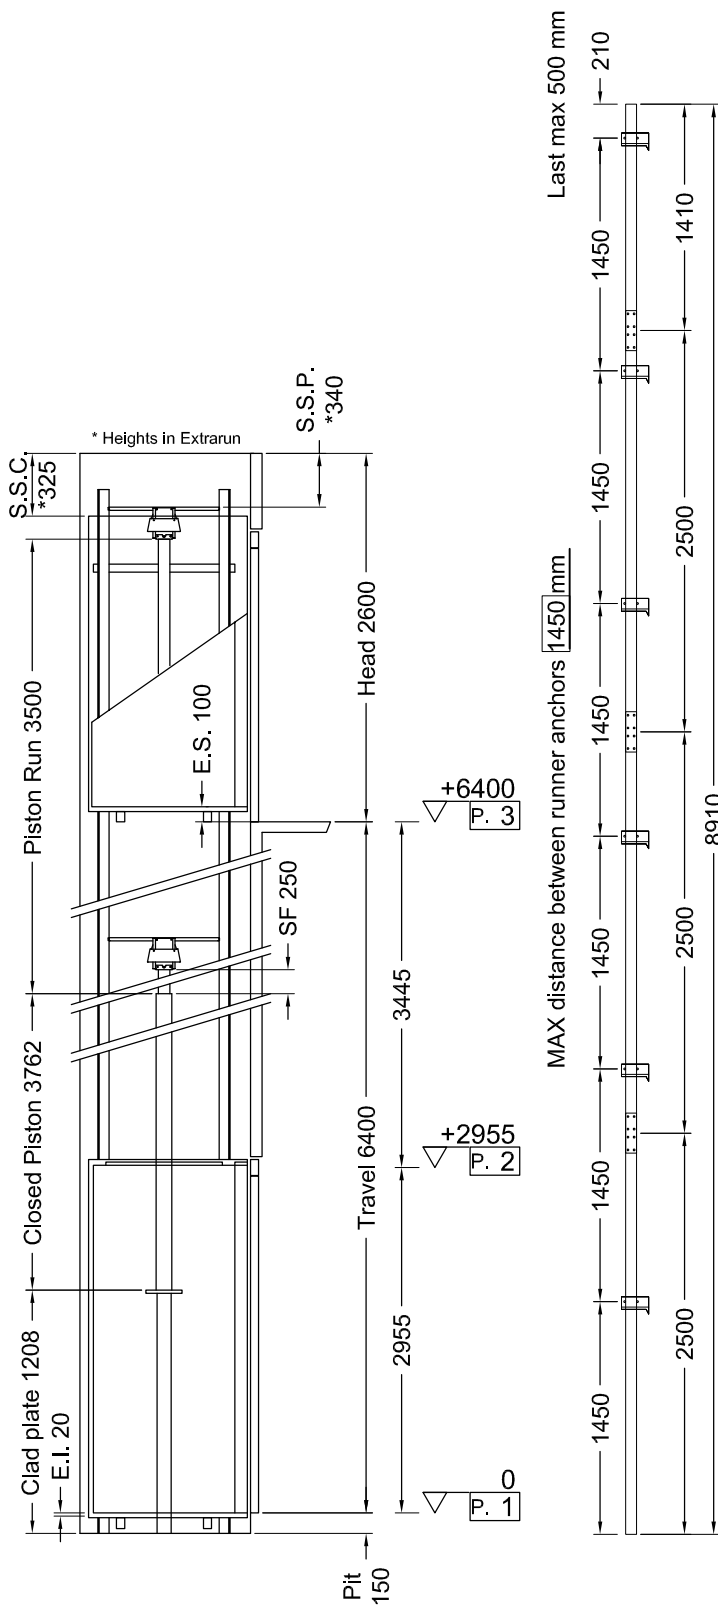

Indirect Installation Speed **0,3 m/s** 19/03/15 16.19 (V.2852) (6)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12609	P	(N)	668
N	(N)	869	N	(N)	8607
F1	(N)	1861	F1	(N)	3102
F2	(N)	376	F2	(N)	627

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	40,21
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	22,37
SF.	Piston extraction (mm)	Overpressure limit (bar)	56,3
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,73
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Ropes	Ø 11 mm 6-(1+9+9)
Power (Kw)	3,4	Cables length (mm) 2 x	12000
Nominal current (A)	32	Min actual breaking load (N)	70700
Piston	Start Home (ø)70x5x3500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	48		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Kronenberg	DLF-1	TÜV ATV 13/7

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Inox Scotch Brite	Panoramic***	Side D
Finishes	Inox Scotch Brite	Outside covering	Side B, C, D, Roof
Oper. panel	VERTICAL - Flush Corner A-B	Outside finishing	Inox Scotch Brite
Floor	By Customer	Mirror***	Side A
Ceiling	SPOTS LED - Blanco A1		
		(***) No Strip	

OTHER ACCESSORIES
Mechanic painted RAL 9005
Guides dimension 2.5 m
Piston painted RAL 9005
Manual pump
Manostat with overweight signal
Two speed
Telephone by Lift Shop
Cabinet: SimlInox F12PPS
Full height infra-red curtain V2
Roof covering
Automatic Control 2011