


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1			2 Panels F41PPS	2000	2210	F41PPS	Absent		PM

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

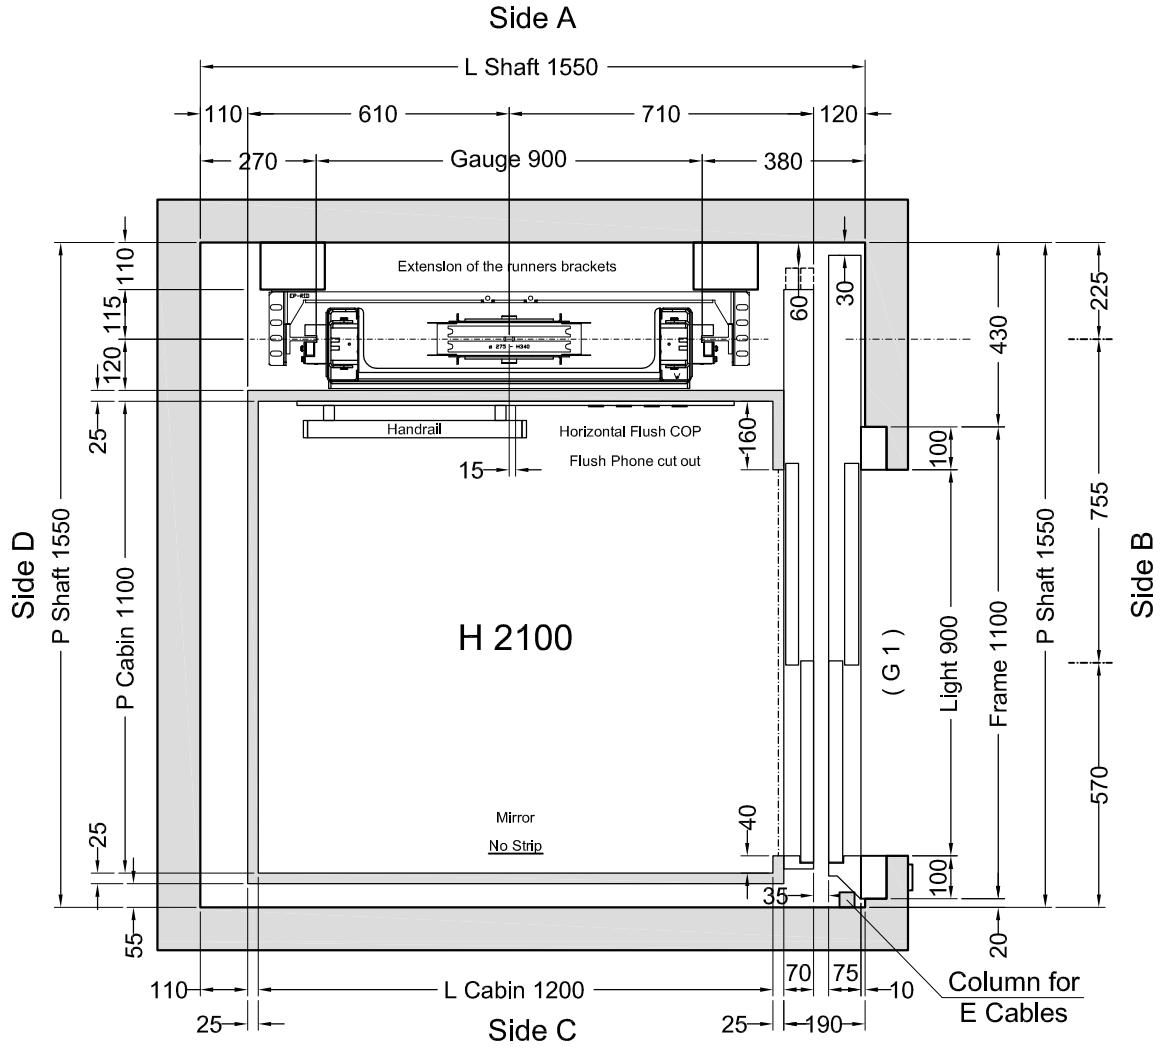


Cabina
Classica

1
G

Stops: 2 - Doors: 2

Shaft in **Reinforced concrete (C.A.)**

Feasibility n° 2770 - Wall Side A - Head

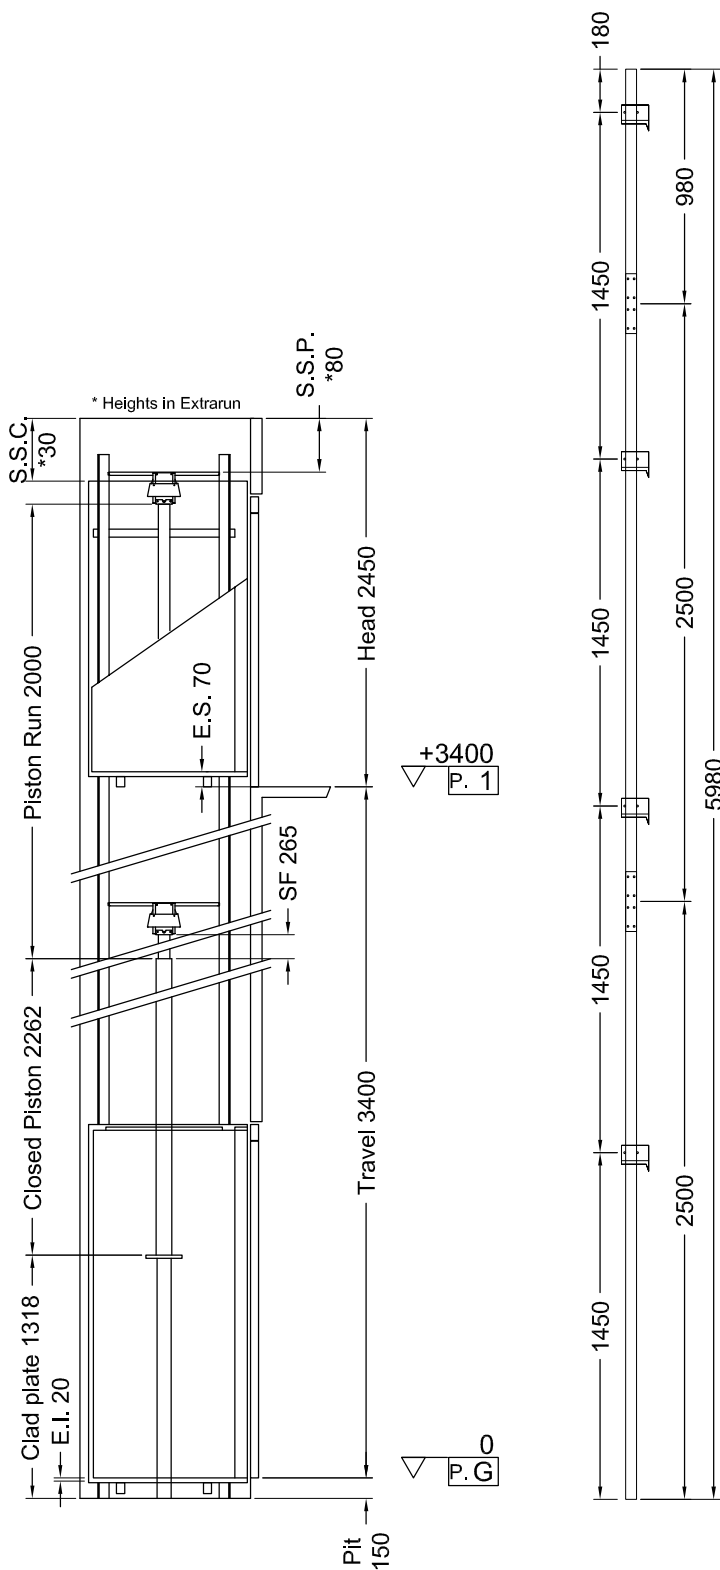

Indirect Installation Speed **0,3 m/s** 20/04/16 16.30 (V.2876) GMD

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12339	P	(N)	550
N	(N)	570	N	(N)	8246
F1	(N)	1569	F1	(N)	2615
F2	(N)	293	F2	(N)	488

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	41,5
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	23,65
SF.	Piston extraction (mm)	Overpressure limit (bar)	58,09
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,43
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 4
Motor (V)	TF400V	Ropes	\varnothing 11 mm 6-(1+9+9)
Power (Kw)	3,4	Cables length (mm) 2 x	9000
Nominal current (A)	14	Min actual breaking load (N)	70700
Piston	Start Home (\varnothing) 70x5x2000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	40		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	1500 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Arpa 2206 VG Luc	Mirror	No Strip Side C
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side A
Oper. panel	Horizontal Flush mounted **		
Floor	Gomma a Bolle - Nera		
Ceiling	DAMA - Griglio PPS1		
Cabin Doors	Side B: 2-Panels Automatic Sliding doors, F41PPS		
	(**) Inox Scotch Brite		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Return to the lower floor after adjustable time
 - False head device
 - Telephone by Lift Shop
 - Full height infra-red curtain V2
 - Power supply 400V 3 phase
 - Floor Button Pad fixed to the Wall
 - Reduced outriggers
 - Automatic Control 2011
 - Call Accept + Emergency manual descent from cabin
 - Cabin Buttons: "G, 1"
 - Cut out for flush phone 86 mm x 175 mm on COP

