

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G			Not Supplied by EP	2000	2110				C2 - PM
		1 2 3	Not Supplied by EP	2000	2110				C2


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	G + RAL *	Glass	Pit bottom	Excluded	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Z + RAL *	Vetro	Fondo Fossa	Assente	

(*) Galvanized and RAL 9005

(*) Zincata e RAL 9005

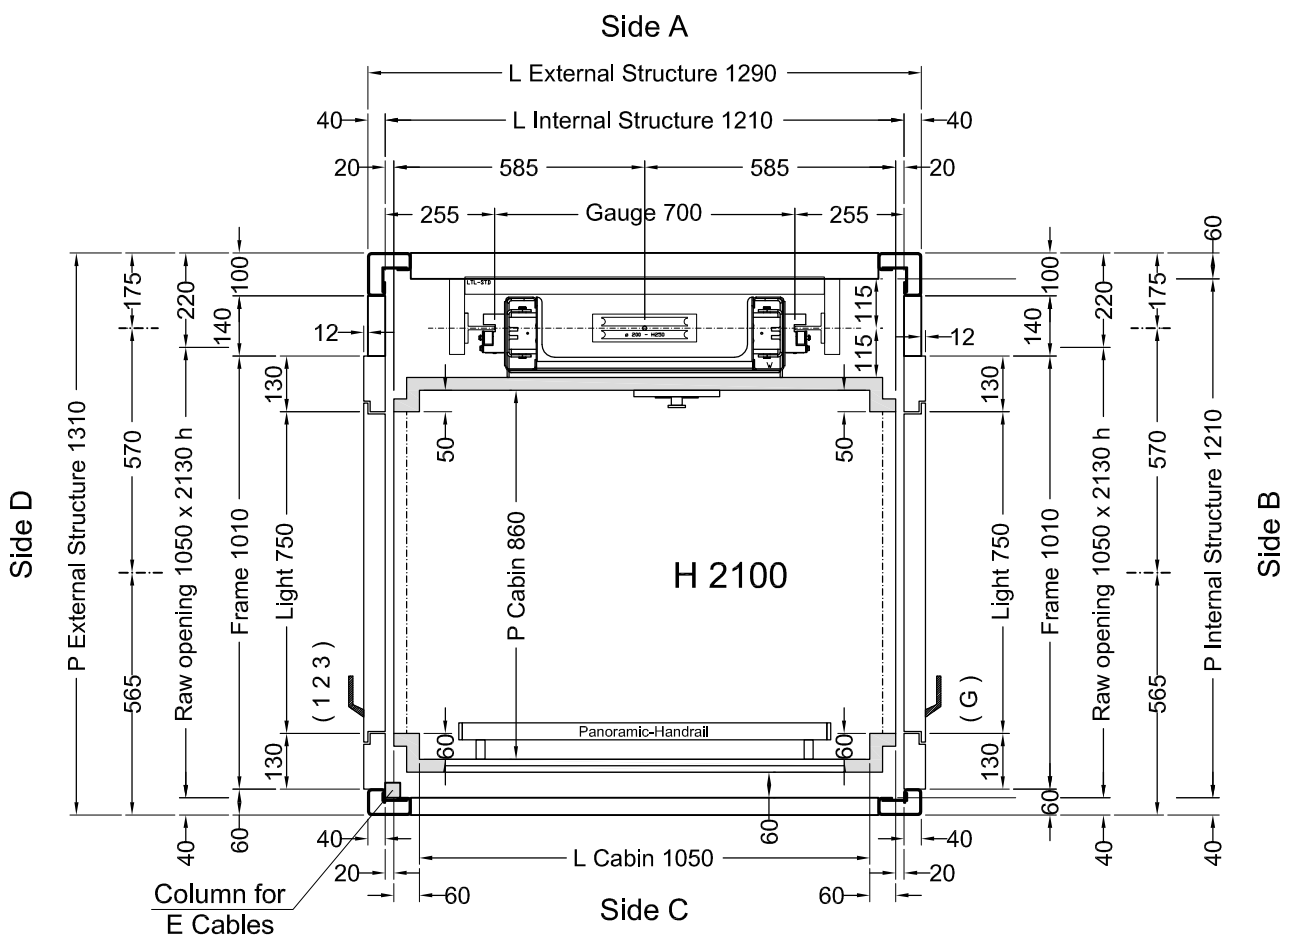

Stops: 4 - Doors: 4


Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1110 (L) x 860 (P)** thks **20 mm** Weight: **50 kg**

			Designer	Date	Final Drawings	
					Model ELFO	SHEET 1/4
			L. Del Bianco	01/09/2014		SHEET DIMENS. A3
			Final Drawings L. Del Bianco	1° STESURA 05/09/14		SCALE 1:12.5
			CAPACITY	AREA m ²	CAPACITY	
			300 kg	0,91		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano basso con tempo regolabile
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Pulsantiera a murare al Piano G
- Carter Tetto cabina
- Manovra Automatica 2011
- Pulsanti Cabina: G 1 2 3

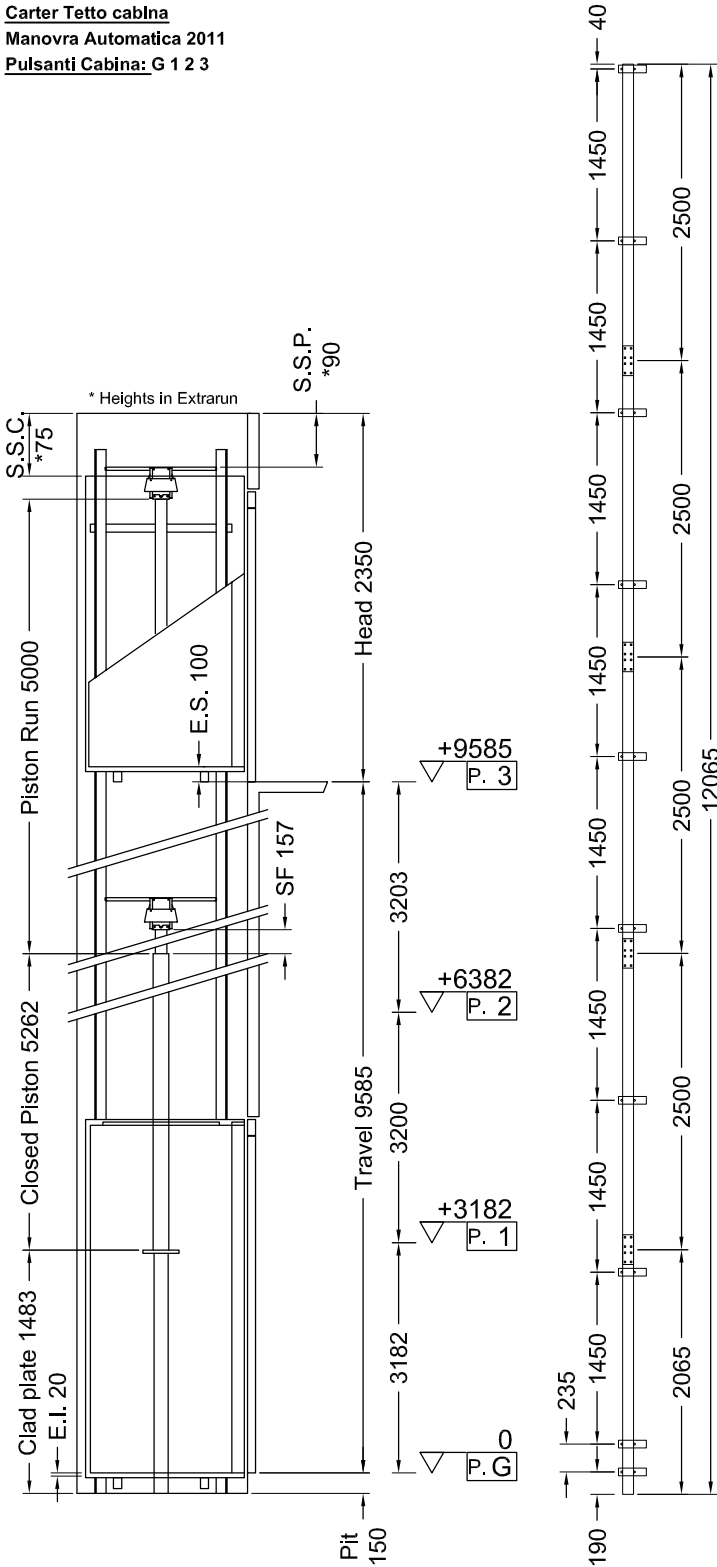

Indirect Installation	Speed 0,3 m/s	05/09/14 17.09 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10317	P	(N)	736
N	(N)	1075	N	(N)	7217
F1	(N)	1113	F1	(N)	1854
F2	(N)	244	F2	(N)	406

SPACES		PRESSURES		
E.I.	Extrairun below cabin (mm)	20	Max static pressure (bar)	34,27
E.S.	Extrairun above cabin (mm)	100	Min static pressure (bar)	18,97
SF.	Piston extraction (mm)	157	Overpressure limit (bar)	47,97
S.S.P.	Piston/head (mm)	90	Residual pressure (bar)	1,91
S.S.C.	Cabin/head (mm)	75		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 10
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Nominal current (A)	19	Cables length (mm) 2 x	15000
Piston	START Homø 70x5x5000	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	55		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	G	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Panoramic	Side C
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side C
Oper. panel	VERTICAL (Like finishes)	Outside covering	Side A**, B, C, D
Floor	By Customer	Outside finishing	Inox BA mecc.
Ceiling	LABIRINT Led Strips - Inox BA mecc.	Roof	Similinox F12PPS

(**) Not Standard

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
False head device
Telephone by Lift Shop
Full height infra-red curtain V2
Floor Button Pad <u>Level G</u> fixed to the Wall
Roof covering
Automatic Control 2011
Cabin Buttons: G 1 2 3




Final Drawings	L. Del Bianco	1° STESURA	05/09/14
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/4


Shaft V66 ()


ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	GG RAL9005	Glass	Pit bottom	Excluded	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	ZR/RAL9005	Vetro	Fondo Fossa	Assente	

(*) Galvanized and RAL 9005
 (*) Zincata e RAL 9005

Anchorage in height of 3 frames in head and every 3.5 m max

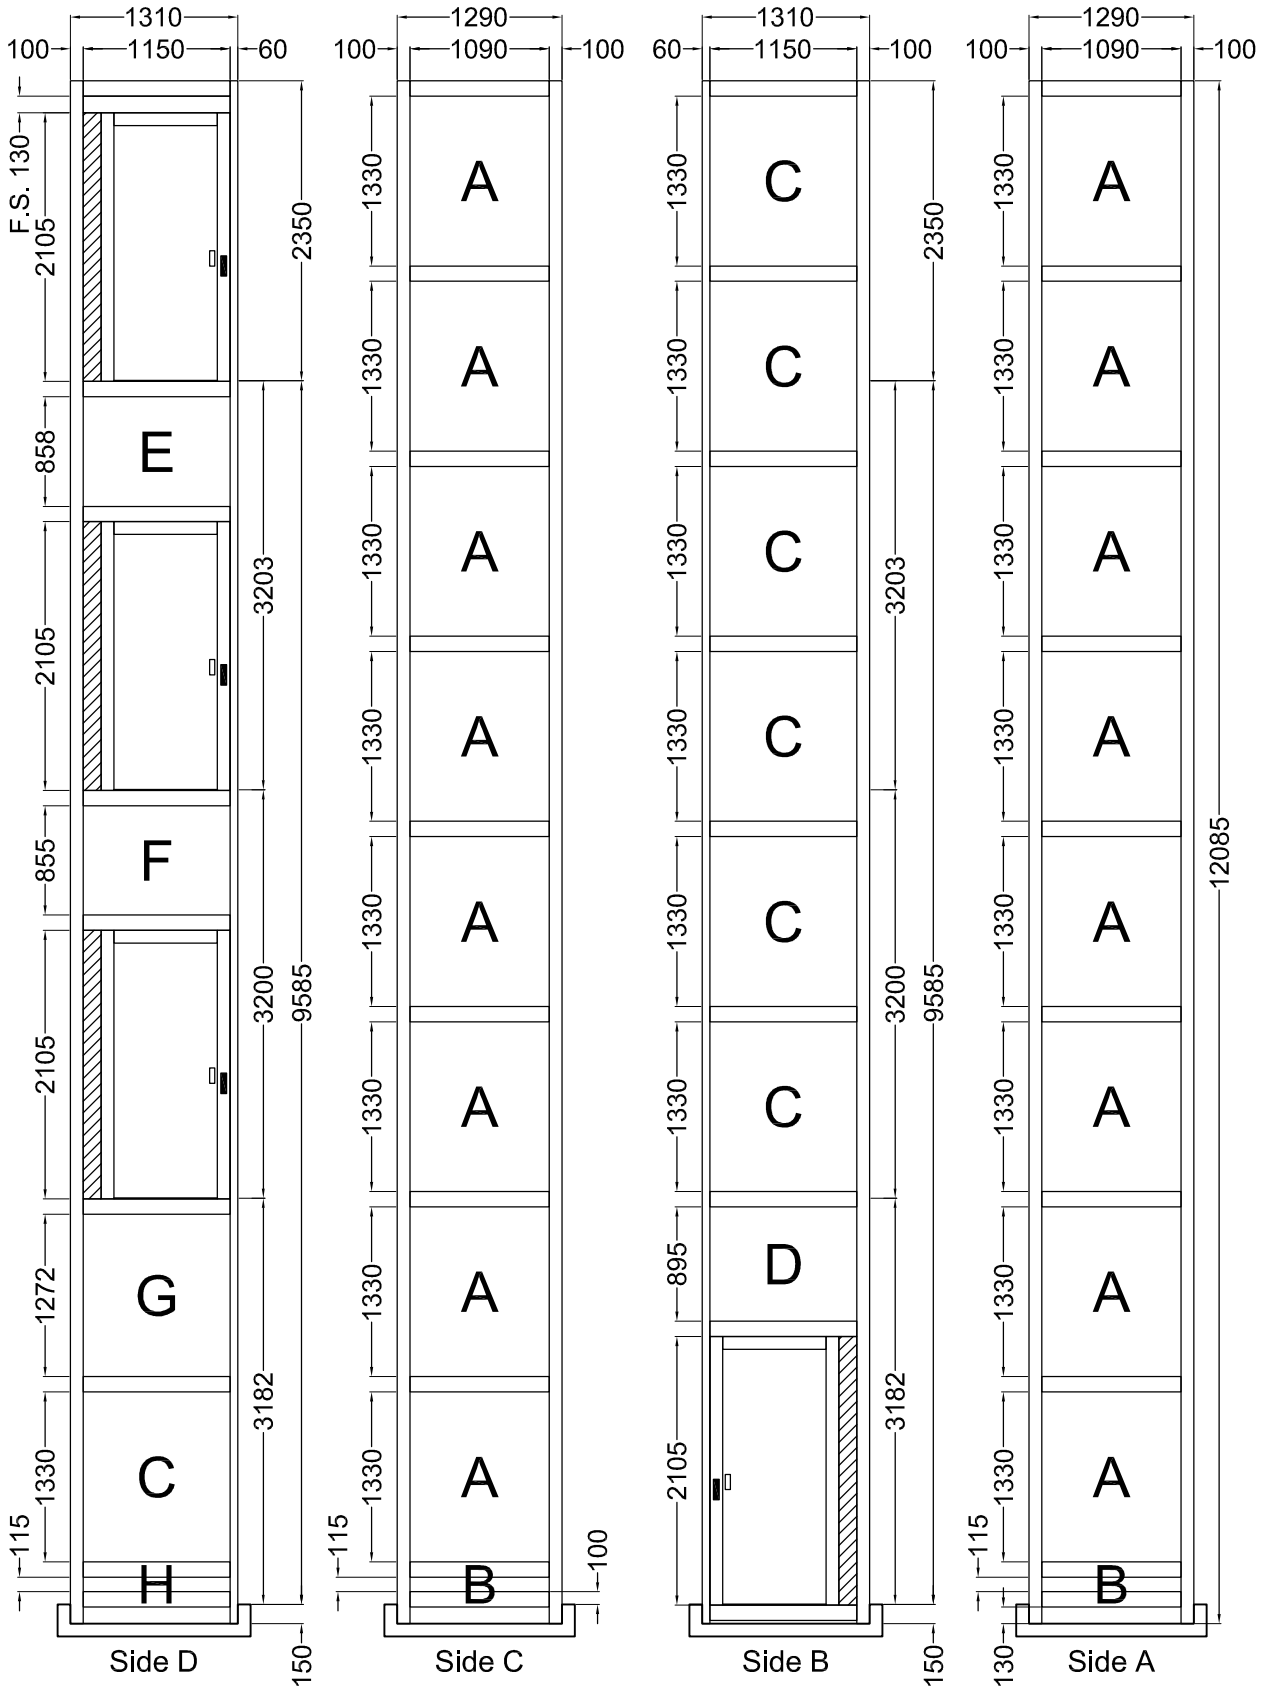

 Cladding Galvanized and RAL 9005

 Tamponamento Zincato e Verniciato RAL 9005

Cladding

Tag	Q.ty	Type	Thickness	Width	Height
A	16	Glass Transparent	8/9	1110	1352
B	2	Glass Transparent	8/9	1110	137
C	7	Glass Transparent	8/9	1170	1352
D	1	Glass Transparent	8/9	1170	917
E	1	Glass Transparent	8/9	1170	880
F	1	Glass Transparent	8/9	1170	877
G	1	Glass Transparent	8/9	1170	1294
H	1	Glass Transparent	8/9	1170	137

