


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2 3	Std. Aluminium Cov. + RAL 9004*	2000	2100	Std. Al. Cov. + RAL 9004*	Panoramic	Transparent	C2


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

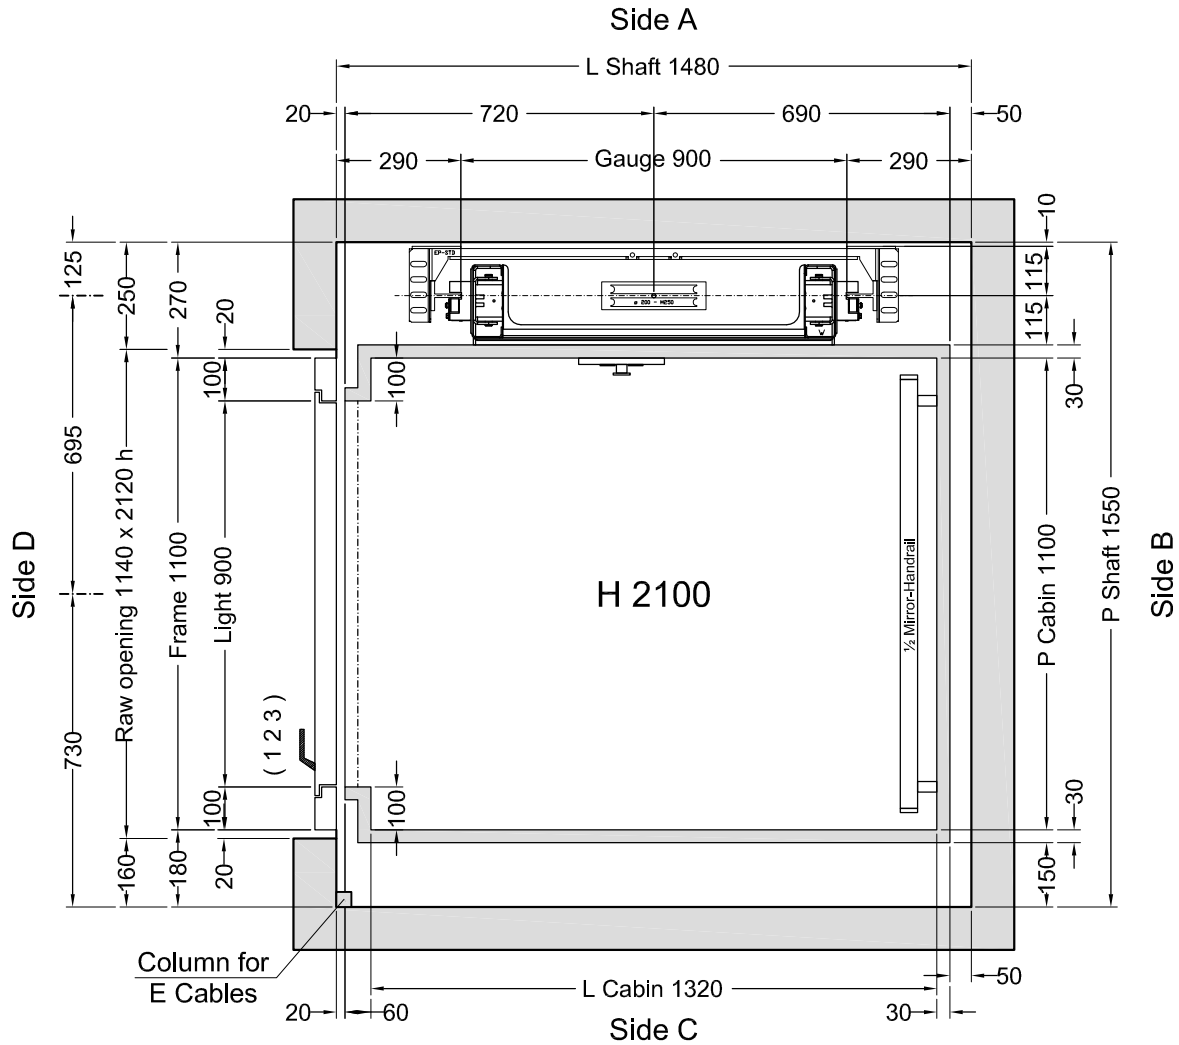

Customer own flooring: Dimensions **1350 (L) x 1100 (P)** thks **20 mm** Weight: **50 kg**

	VERSIONS	Description	Designer	Date	Final Drawings	
		nome fermate , corsa e testata	D.Ogliastro	28/10/2015	Model ELFO	SHEET 1/2
			Final Drawings L. Del Bianco	1° STESURA 10/11/15		SHEET DIMENS. A3
			CAPACITY 300 kg	AREA m ² 1,46	CAPACITY	SCALE 1:12.5

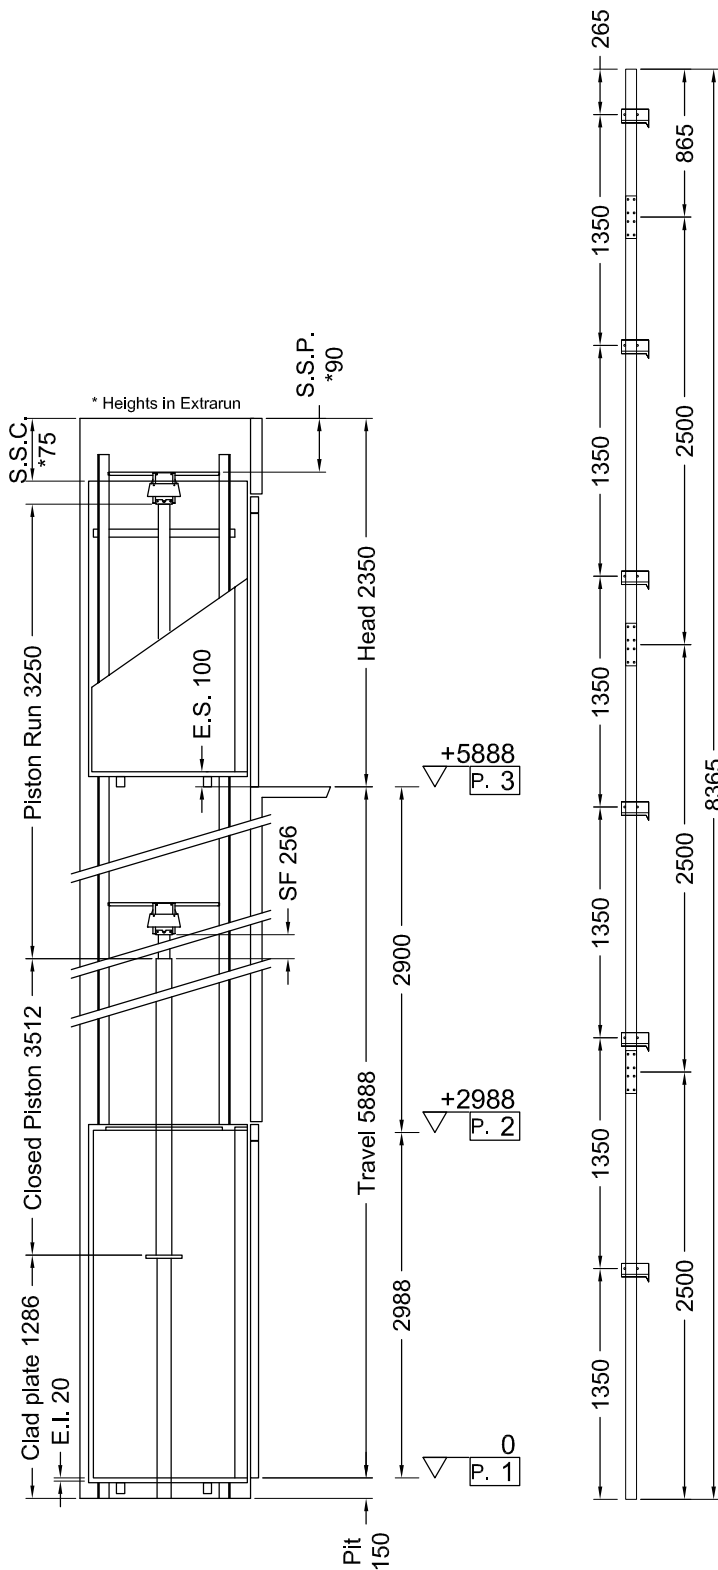

Indirect Installation Speed **0,3 m/s** 10/11/15 09.00 (V.2852) (6)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12259	P	(N)	599
N	(N)	796	N	(N)	8370
F1	(N)	1658	F1	(N)	2764
F2	(N)	357	F2	(N)	595

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	37,89
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	22,59
SF.	Piston extraction (mm)	Overpressure limit (bar)	53,04
S.S.P.	Piston/head (mm)	Residual pressure (bar)	1,56
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Ropes	Ø 9 mm 8-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	11000
Nominal current (A)	27	Min actual breaking load (N)	51000
Piston	Start Home (ø)70x5x3250		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	8000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	B		

CABIN		CABIN ACCESSORIES	
Panels	Avorio PPS11	½ Mirror	Side B
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side B
Oper. panel	VERTICAL (Like finishes)	Outside covering	Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	SPOTS LED - Avorio PPS11		

- OTHER ACCESSORIES**
- Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - False head device
 - Handles CASPIM (Long)
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Roof covering
 - Automatic Control 2011
 - Blue Buttons
 - Call Accept + Emergency manual descent from cabin



Final Drawings	1° STESURA
L. Del Bianco	10/11/15
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2