


The award winning leader

STEEL SHAFT • DRIVE TO RIGHT ADJACENT THROUGH CAR • CUSTOM CABIN / SHAFT

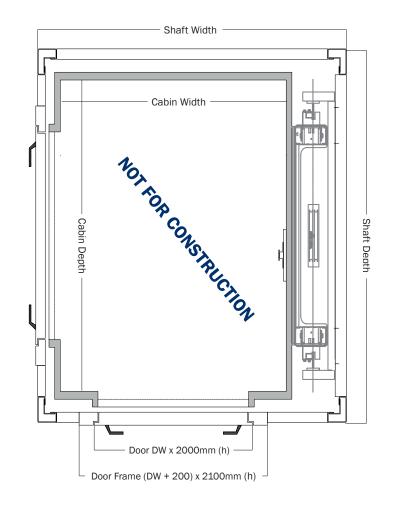

CABIN / SHAFT SIZING			
Cabin Width		+ 450	= SW
Cabin Depth		+ 270	= SD
CABIN SIZE	Minimum	Maximum	
Width	590	1200	
Depth	590	1400	

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

CONSTRUCTION DETAILS

· Construction material steel shaft

External shaft size

· Pit depth

Power supply

 Headroom Lift machine area

Doors sizes

size to suit

130mm - 160mm

2600mm (smaller is possible)

up to 7m away at landing of choice

single phase 240V 32A or 3 phase 415V 20A • Compliance

different jambs may have alternate impact

STANDARD SPECIFICATIONS

 Person capacity 300 - 350 - 400 - 500kg

 Speed $0.30 \, \text{m/s}$ Maximum travel 12m

 Safety protection full height sensor beams

Maximum floors

AS1735.15/18

from 450mm - 1000mm in 50mm increments • Cabin fit out from our huge range of options · Doors finishes from our huge range of options

SHOWROOMS Sydney Melbourne Brisbane Perth 02 9666 3939 03 9421 4222 07 3014 0633 08 9460 0666 855 326 8847