



The award winning leader

# E2


## STEEL SHAFT • DRIVE TO RIGHT OPPOSITE OPENING • CUSTOM CABIN / SHAFT

### HYDRAULIC OPTION

- Drive traditional hydraulic
- Machine area up to 7m away at landing of choice

### ELECTRIC OPTION

- Drive next generation electric traction
- Machine area machine room less (MRL)

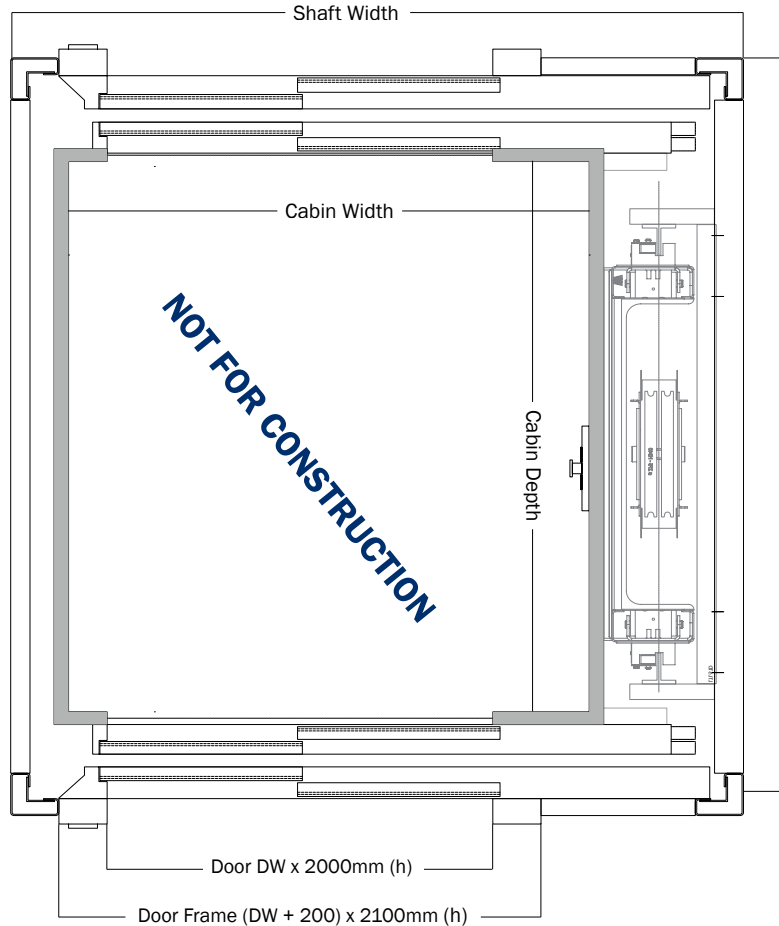

#### CABIN / SHAFT SIZING

Cabin Width	+ 550	= SW
Cabin Depth	+ 530	= SD

#### CABIN SIZE Minimum Maximum

Width	800	1200
Depth	800	1400

#### CABIN / SHAFT SIZING

Cabin Width	+ 600	= SW
Cabin Depth	+ 530	= SD

#### CABIN SIZE Minimum Maximum

Width	850	1200
Depth	850	1400

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

### CONSTRUCTION DETAILS

- Construction material steel shaft
- External shaft size size to suit
- Pit depth 150mm - 180mm
- Headroom 2500 - 2800mm
- Power supply single phase 240V 32A or 3 phase 415V 20A
- Doors sizes from 650mm - 1000mm in 50mm increments  
different jambs may have alternate impact

### STANDARD SPECIFICATIONS

- Person capacity 4 - 5 persons (400kg)
- Maximum travel 12m
- Speed 0.30m/s
- Safety protection full height sensor beams
- Maximum floors 6
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options
- Compliance AS1735.16/18