



The award winning leader

E1


SHAFT BY BUILDER • DRIVE TO RIGHT OPPOSITE THROUGH CAR • CUSTOM CABIN / SHAFT

HYDRAULIC OPTION

- Drive traditional hydraulic
- Machine area up to 7m away at landing of choice
- Person capacity 3 - 6 persons
300 - 500kg

ELECTRIC OPTION

- Drive next generation electric traction
- Machine area machine room less (MRL)
- Person capacity 4 - 5 persons
400kg

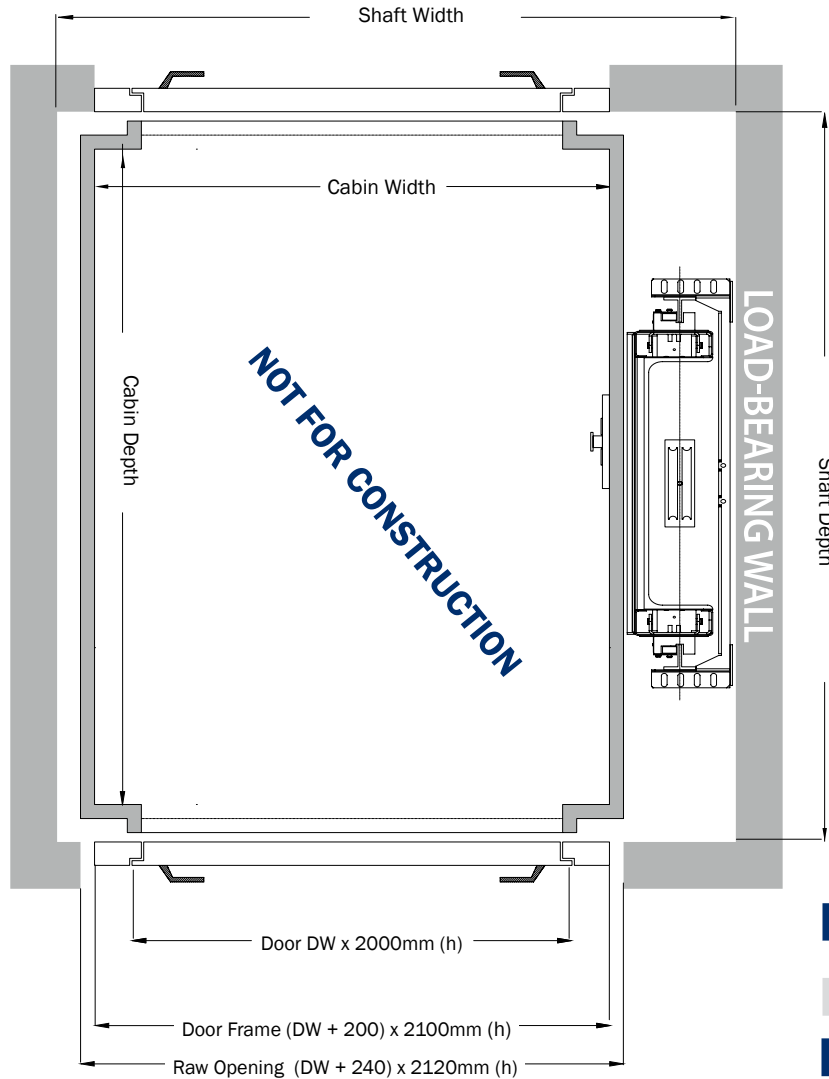

CABIN / SHAFT SIZING

Cabin Width	+ 350	= SW
Cabin Depth	+ 160	= SD

CABIN SIZE

	Minimum	Maximum
Width	600	1200
Depth	600	1400

CABIN / SHAFT SIZING

Cabin Width	+ 400	= SW
Cabin Depth	+ 160	= SD

CABIN SIZE

	Minimum	Maximum
Width	850	1200
Depth	850	1400

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

CONSTRUCTION DETAILS

- Construction material re-inforced blockwork or equivalent
- Internal shaft size size to suit
- Pit depth 150mm - 170mm
- Headroom 2400 - 2600mm
- Power supply single phase 240V 32A or 3 phase 415V 20A
- Doors sizes from 450mm - 1000mm in 50mm increments
different jambs may have alternate impact

STANDARD SPECIFICATIONS

- Maximum travel 12m
- Speed 0.15 - 0.30m/s
- Safety protection full height sensor beams
- Maximum floors 6
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options
- Compliance AS1735.15/18