

The award winning leader


STEEL SHAFT • DRIVE TO LEFT ADJACENT THROUGH CAR . CUSTOM CABIN / SHAFT

HYDRAULIC OPTION

 Drive traditional hydraulic

 Machine up to 7m away at landing of choice area

3 - 6 persons Person 300 - 500kg capacity

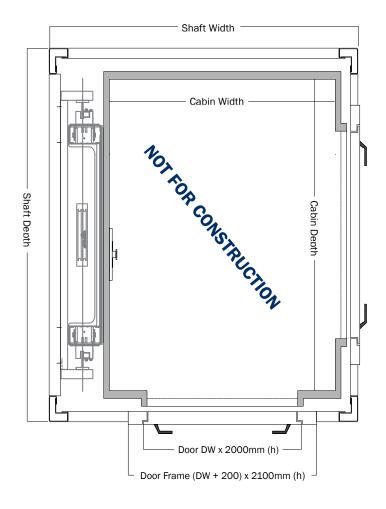

ELECTRIC OPTION

• Drive next generation electric traction

 Machine machine room area less (MRL)

4 - 5 persons Person 400kg capacity

CABIN / SHAFT SIZING		
Cabin Width	+ 460	= SW
Cabin Depth	+ 270	= SD

CABIN SIZE	Minimum	Maximum
Width	600	1200
Depth	600	1400

CABIN / SHAFT SIZING				
Cabin Width	+ 510	= SW		
Cabin Depth	+ 270	= SD		

CABIN SIZE	Minimum	Maximum
Width	850	1200
Depth	850	1400

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

CONSTRUCTION DETAILS

· Construction material steel shaft · External shaft size size to suit 130mm - 170mm · Pit depth 2400 - 2600mm Headroom

single phase 240V 32A or 3 phase 415V 20A · Power supply · Doors sizes

different jambs may have alternate impact

from 450mm - 1000mm in 50mm increments

STANDARD SPECIFICATIONS

 Maximum travel 12m

 Speed 0.15 - 0.30 m/s

· Safety protection full height sensor beams

· Maximum floors

· Cabin fit out from our huge range of options · Doors finishes from our huge range of options

 Compliance AS1735.15/18

SHOWROOMS Sydney Melbourne Brisbane Perth 02 9666 3939 03 9421 4222 07 3014 0633 08 9460 0666 855 326 8847