


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2	2 Panels Inox Scotch Brite	2000	2210	Inox Scotch Brite	Absent		DY - Icaro
		3	2 Panels Inox Scotch Brite	2000	2210	Inox Scotch Brite	Absent		DY - Icaro



C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

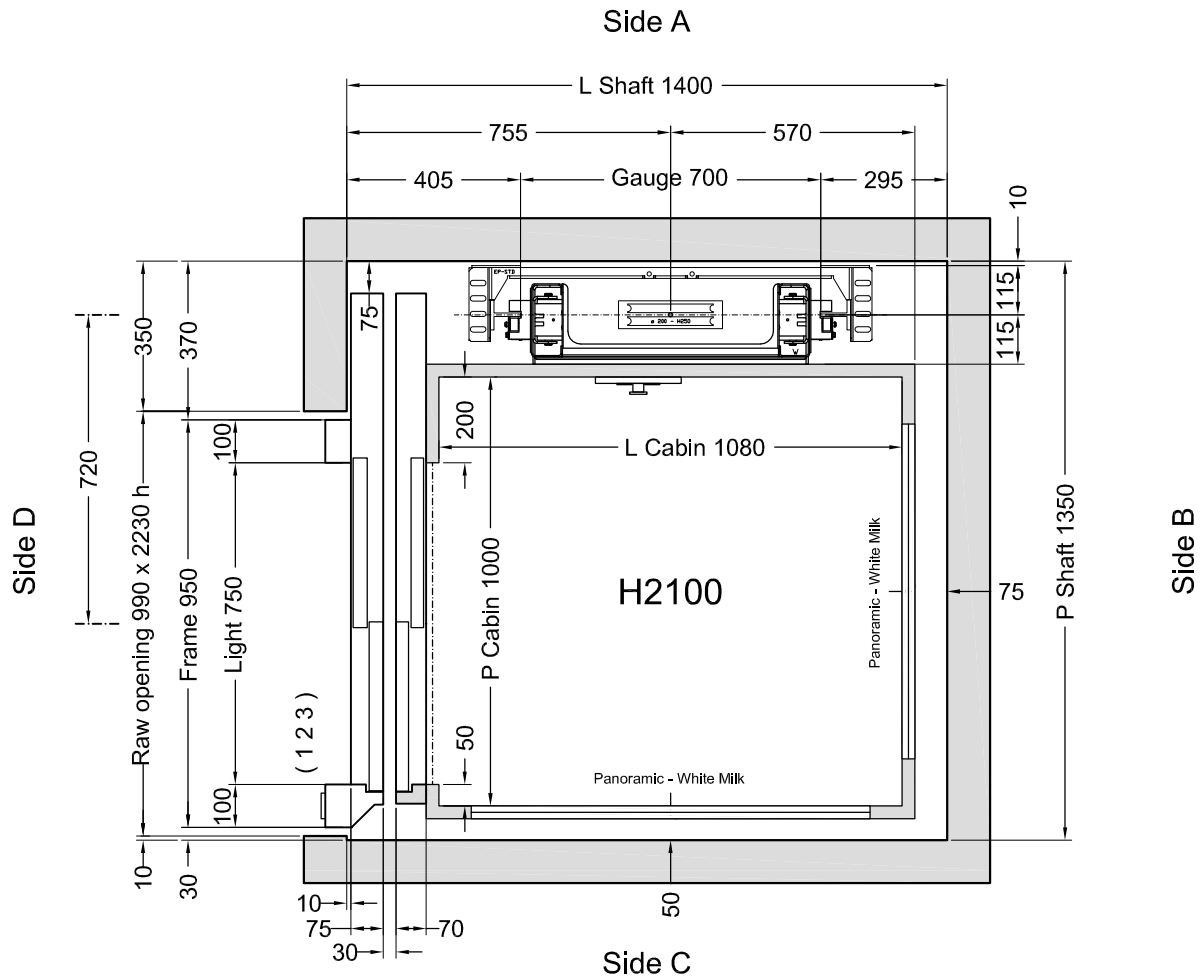

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

~~Preliminary Plans Only. NOT for Construction~~

VERSIONS	Description	Designer	Date	Final Design Drawings	
				Model	SHEET
				ELFO 2	1/3
	Dimensioni vano e porta di piano - corsa fossa e interpiani	Colamarino	10/09/2013		SHEET DIMENS. A3
		Final Design Drawings Colamarino	1° STESURA 28/05/13		SCALE 1:12.5
		CAPACITY 350 kg	AREA m ² 1,08	CAPACITY	

ACCESSORI:

- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano basso con tempo regolabile
- Dispositivo falsa testata
- Telefono Lift Shop
- Armadio (per centralina e quadro): Similinox F12PPS
- Fotocellula tutta parete
- Display ICARO In cabina
- Manovra Automatica 2011
- Operatori e Sospensioni Fermator

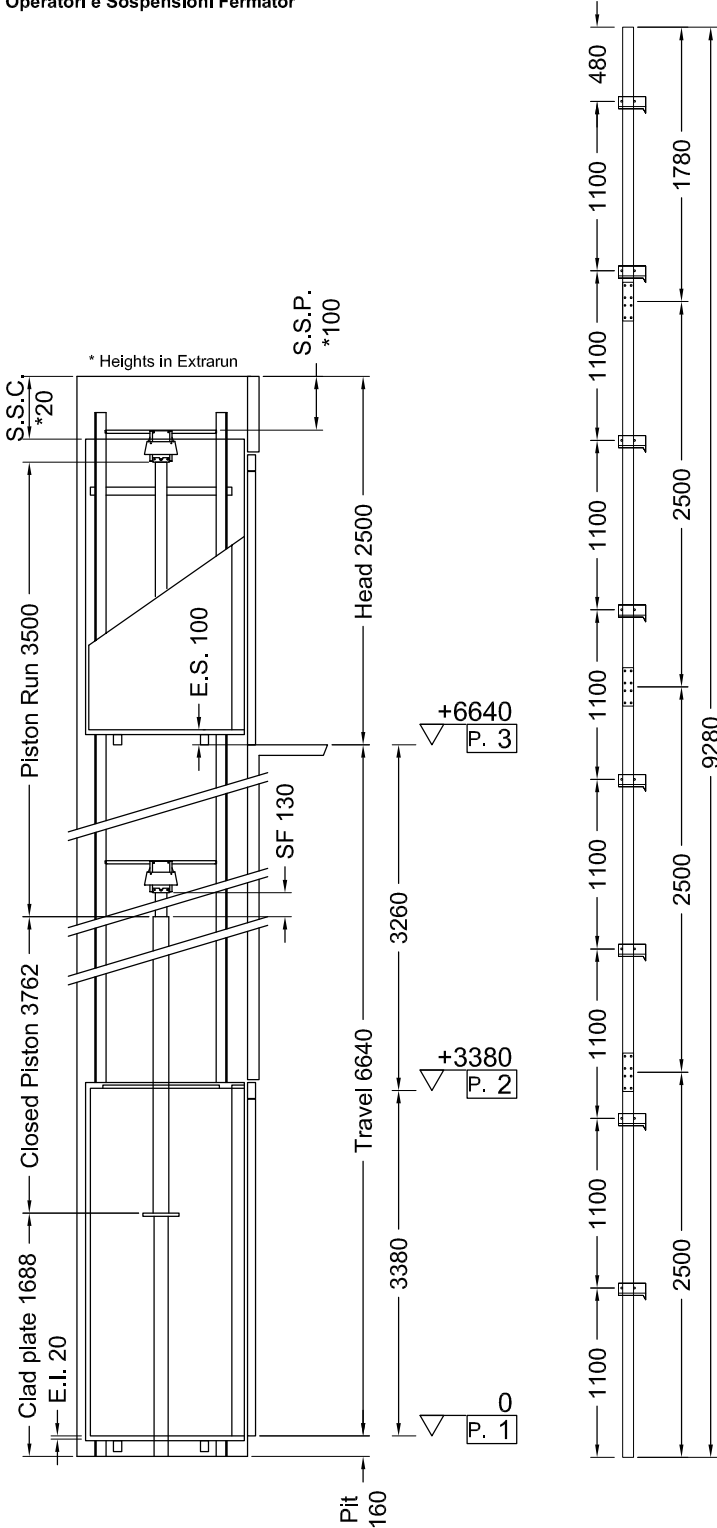

Indirect Installation	Speed 0,3 m/s	10/09/13 09.32 (V.2821)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.
P	(N) 12086	P (N) 619
N	(N) 826	N (N) 8265
F1	(N) 1414	F1 (N) 2357
F2	(N) 267	F2 (N) 444

MACHINERY LOCATION			
At floor	1	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	C	Hydraulic unit model	-*

CABIN		CABIN ACCESSORIES	
Panels	Inox Super Mirror	Panoramic	Side B, C - White Milk
Finishes	Inox Scotch Brite	Outside covering	Side B, C
Oper. panel	VERTICAL (Like finishes)	Outside finishing	not defined
Floor	ROCK SOLID 671		
Roof	SPOTS LED - Blanco A1		
Cabin Doors	Side D: 2-Panels Automatic Sliding doors, Inox Scotch Brite		

OTHER ACCESSORIES
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
False head device
Telephone by Lift Shop
Cabinet: Similinox F12PPS
Full height infra-red curtain
ICARO display in cabin
Automatic control 2011
Operatori e Sospensioni Fermator

The information contained in this drawing are completed by machinery manual rev.4 | * See machinery manual rev. 4