


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
		1 2 3	Standard Rust-proof	2000	2100	Absent				X		
			Flath without raised edges (for covering)									

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Automatic Control
2008

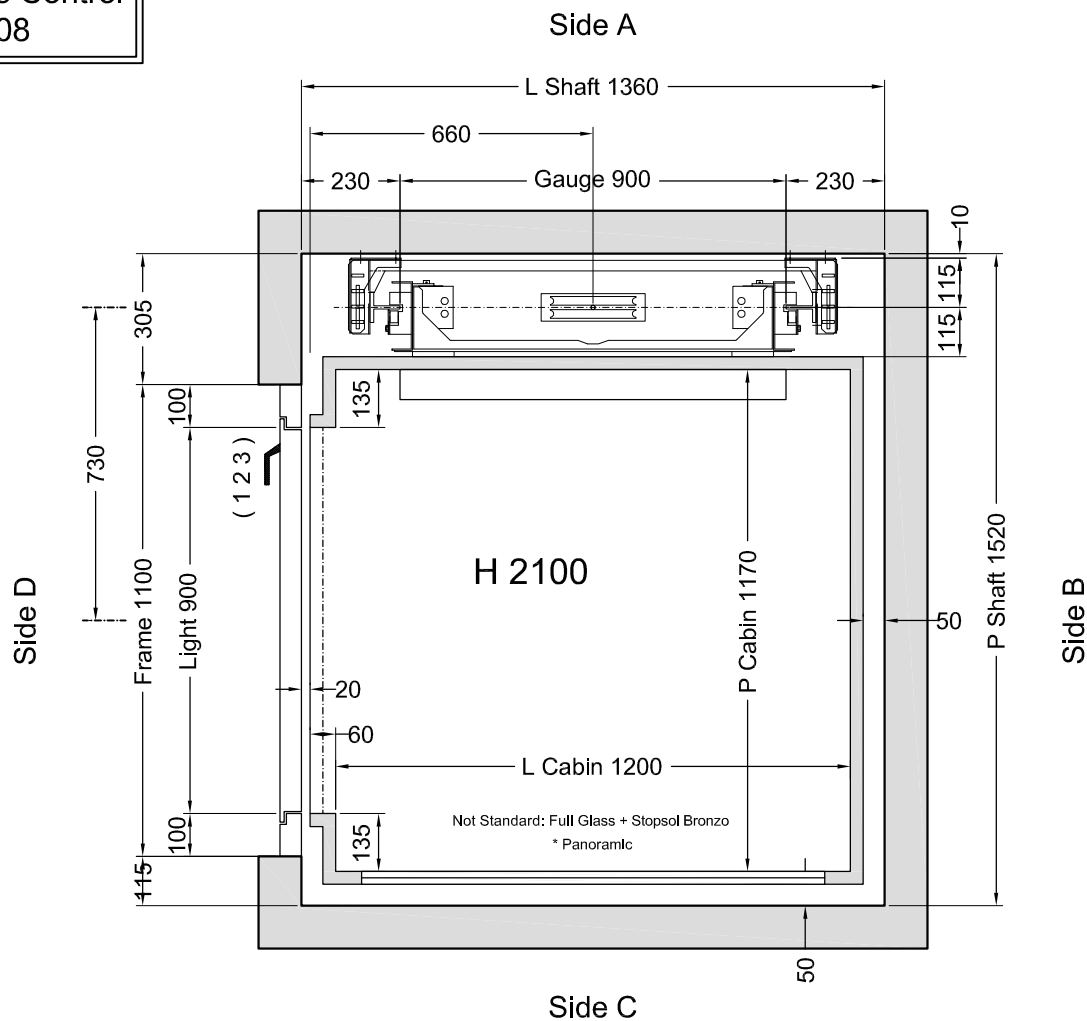

(*) Not Standard: Full Glass + Stopsol Bronzo

Customer own flooring: Dimensions **1230 (L) x 1170 (P)** thks **15 mm** Weight: **50 kg**

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

Feasibility n°1562 Panel Side C Full Glass Wall Stopsol Bronzo

VERSIONS	Description	Designer	Date	Final Design Drawings
				SHEET DIMENS. A3
	Corsa; Pulsantiera Orizzontale; Parete fuori standard Lato C.	L.Del Bianco	26/07/2011	SCALE 1:12.5
		Final Design Drawings D.Ogliastro	1° STESURA 23/09/10	CAPACITY
		CAPACITY 350 kg	AREA m ² 1,41	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pistone In due pezzi
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Interruttore blocco porta quadro
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete
- Manovra Automatica 2008

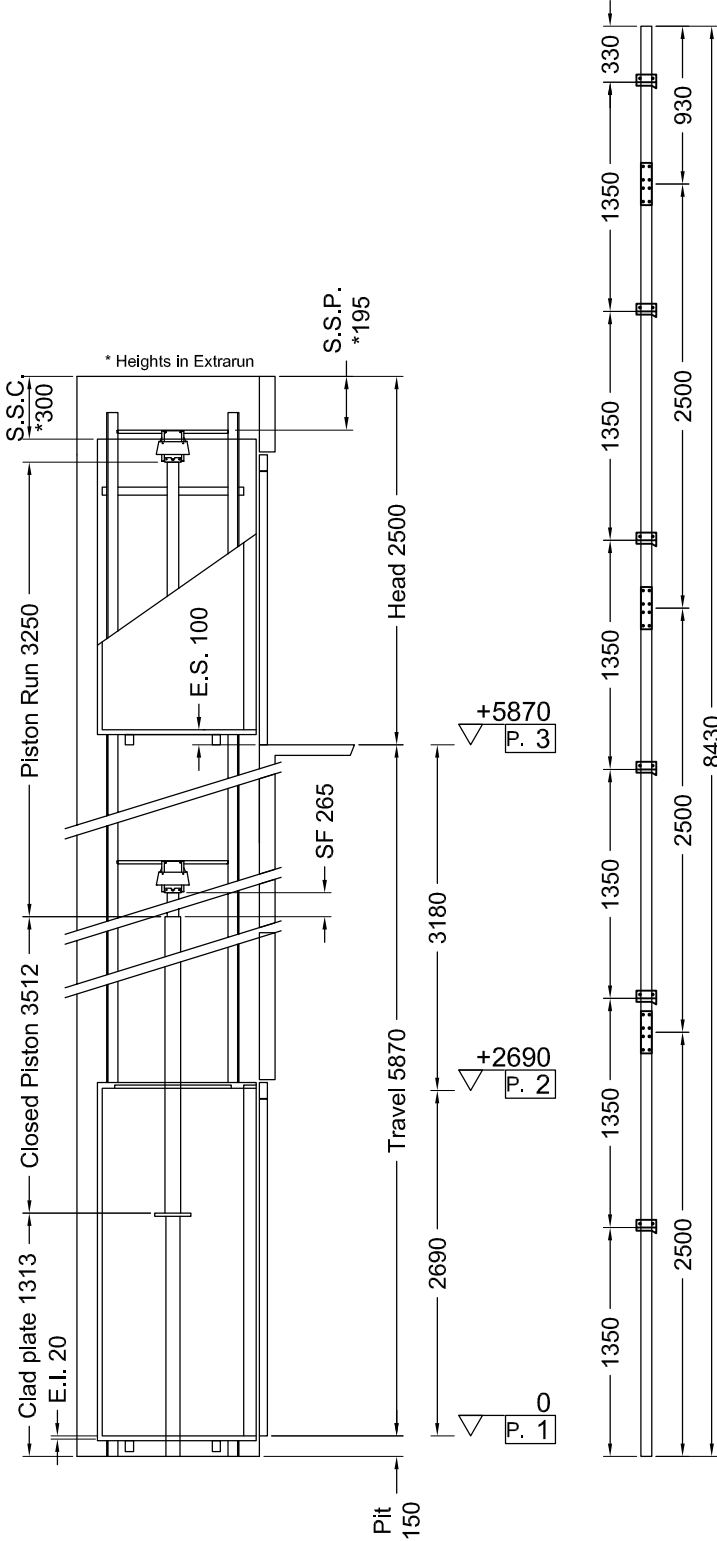

Indirect Installation	Speed 0,3 m/s	26/07/11 14.49 (V.2504)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.
P	(N) 11405	P (N) 599
N	(N) 757	N (N) 7761
F1	(N) 1763	F1 (N) 2938
F2	(N) 344	F2 (N) 573

MACHINERY LOCATION		
At floor	1	Length of the hose travel 2000 (mm)
Cables enter in shaft: Side	A	

CABIN		CABIN ACCESSORIES	
Panels	Inox Scotch Brite	Panoramic	Lati C
Finishes	Inox Scotch Brite	Riv. Est.	Side C
Oper. panel	HORIZONTAL	Riv. Esterno	Inox Scotch Brite
Floor	By Customer		
Roof	SPOTS LED - Bianco A1		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Piston In 2 pcs
 - Manual pump
 - Manostat with overweight signal
 - Double speed
 - Cabinet General switcher to enabling controller
 - Reinforced arcade
 - Handles CASPIM
 - Full height infra-red curtain
 - Automatic control 2008

The approval of this plan serves also as confirmation of delivery of the masonry manual rev.3.

		Final Design Drawings	1° STESURA
			23/09/10
		Final Design Drawings	
		SCALE	SHEET
		OUT OF SCALE	2/2